

Maintenance Manual

Medical

**Important
Information**

File in your
maintenance
records

**Eye Surgery Stretcher
Model 1069**

**For parts or technical
assistance call
800 327 0770 (option 2)**



Table of Contents

| | |
|---|--------|
| Introduction | |
| Specifications | 3 |
| Warning / Caution / Note Definition | 3 |
| Preventative Maintenance | |
| Checklist | 4 |
| Cleaning | 5 |
| Service Information | |
| Caster Cover Installation and Removal | 6 |
| Caster Removal | 6 |
| Release Pedal Adjustment | 7 |
| Brake Rod Removal | 7 |
| Side Control Brake Rod Removal | 8 |
| Foot End Release Pedal Replacement | 9 |
| Foot End Release Pedal Rod Removal | 9 |
| Brake Ring Removal | 10 |
| Fifth Wheel Assembly Removal | 10 |
| Litter Top Removal | 11 |
| Removal of Excess Air from the Hydraulic System | 11 |
| Jack Descent Rate Adjustment | 11 |
| Foot End Hydraulic Jack Removal | 12 |
| Head End Hydraulic Jack Removal | 12 |
| Siderail Latch Adjustment | 13 |
| Arm Board Counterbalance Adjustment | 13 |
| Pneumatic Fowler Adjustment | 14 |
| Pneumatic Fowler Release Handle Adjustment | 15 |
| Pneumatic Cylinder Replacement | 16 |
| Quick Reference Replacement Parts List | 17 |
| Assembly Drawings and Parts Lists | |
| Base Assembly with Foot End Brakes | 19, 20 |
| Brake Rod Assembly (Foot End Brakes) | 21 |
| Base Assembly with Foot End and Side Control Brakes | 22, 23 |
| Side Control Brake Rod Assembly | 24 |
| Brake Rod Assembly | 25 |
| Base with Dual Side Hydraulics | 26–28 |
| Release Pedal Assembly | 29 |
| Head End Pump Pedal Assembly | 30 |

Table of Contents

| | |
|--|-----------|
| Assembly Drawings and Parts Lists (Continued) | |
| Base Assembly with Three-Side Hydraulics | 31, 32 |
| Foot End Release Pedal Assembly | 33 |
| Foot End Pedal / Bearing Assembly | 34 |
| Drive Link Assembly | 35, 36 |
| Caster Assembly | 37 |
| Fifth Wheel Base Assembly | 39 |
| Fifth Wheel Assembly | 40, 41 |
| Base Labeling Assembly | 42 – 50 |
| Constant Descent Hydraulic Jacks | 51 |
| Trend Limiter | 52 |
| Litter Assembly | 53 – 55 |
| Jack Support Assembly | 56, 57 |
| Pneumatic Fowler Assembly | 58 – 71 |
| Articulating Head Piece Assembly | 72 – 75 |
| Crank Fowler Assembly | 76 – 83 |
| Stationary Foot Section Assembly | 84 |
| Knee Gatch Assembly | 86 – 89 |
| Siderail Assembly | 90 – 93 |
| Transfer System Assembly | 94 – 97 |
| Pre-Op/Post-Op Head Piece | 98–101 |
| IV Pole Assembly | 102–108 |
| O2 Bottle Holder | 109 |
| Defibrillator Tray Assembly | 110 |
| Foot Extension/Defibrillator Tray Assembly | 111 |
| Wrist Rests | 112 – 114 |
| Air Delivery / Drape Support | 115 |
| Accessory Rail Assembly | 116 |
| Arm Board Assembly | 117, 118 |
| Serving Tray Assembly | 119 |
| Foot Board/Chartholder Assembly | 120 |
| Mattresses and Siderail Pads | 121 |
| Warranty | |
| Obtaining Parts and Service | 122 |
| Service Contract Coverage | 122 |
| Return Authorization | 123 |
| Freight Damage Claims | 123 |

Introduction

INTRODUCTION

This manual is designed to assist you with the maintenance of the Model 1069 Eye Surgery Stretcher. Read it thoroughly before using the equipment or beginning any maintenance on it.

SPECIFICATIONS

| | | |
|-------------------------------------|--------------|---|
| Maximum Weight Capacity | 500 pounds |  |
| Overall Bed Length/Width | 90" / 31.5" | |
| Minimum/Maximum Bed Height | 22.25" / 34" | |
| Fowler Angle | 0 to 90° | |
| Knee Gatch Angle | 0 to 30° | |
| Trendelenburg/Reverse Trendelenburg | -18° to +18° | |

Stryker reserves the right to change specifications without notice.

WARNING / CAUTION / NOTE DEFINITION

The words WARNING, CAUTION and NOTE carry special meanings and should be carefully reviewed.

WARNING

Alerts the reader about a situation, which if not avoided, could result in death or serious injury. It may also describe potential serious adverse reactions and safety hazards.

CAUTION

Alerts the reader of a potentially hazardous situation, which if not avoided, may result in minor or moderate injury to the user or patient or damage to the equipment or other property. This includes special care necessary for the safe and effective use of the device and the care necessary to avoid damage to a device that may occur as a result of use or misuse.

NOTE

This provides special information to make maintenance easier or important instructions clearer.



Safe Working Load

Preventative Maintenance

CHECKLIST

- All fasteners secure
- Siderails move and latch properly
- Engage brake pedal and push on the stretcher to ensure all casters lock securely
- Steer function working properly
- All casters secure and swiveling properly
- Body restraints working properly
- I.V. pole intact and operating properly
- Oxygen bottle holder intact and operating properly
- Fowler operating properly
- Optional articulating head piece locking and releasing properly
- Knee Gatch operating properly
- Trendelenburg/Reverse Trendelenburg operating properly
- No rips or cracks in mattress cover
- Arm boards intact and operating properly
- Arm board support levers intact and operating properly
- Ground chain intact
- No leaks at hydraulic connections
- Hydraulic jacks holding properly
- Hydraulic drop rate set properly
- Hydraulic oil level sufficient
- Lubricate where required, including the pin and block ("U" joint) on the Fowler assembly

Serial No._____

Completed By:_____

Date:_____

NOTE

Preventative maintenance should be performed at a minimum of annually. A preventative maintenance program should be established for all Stryker Medical equipment. Preventative maintenance may need to be performed more frequently based on the usage level of the product.

Cleaning

Hand wash all surfaces of the stretcher with warm water and mild detergent. DRY THOROUGHLY. Do not steam clean, pressure wash, hose off or ultrasonically clean. Using these methods of cleaning is **not** recommended and may void this product's warranty.

Suggested cleaners for stretcher surfaces:

Quaternary Cleaners (active ingredient – ammonium chloride)

Phenolic Cleaners (active ingredient – o-phenylphenol)

Chlorinated Bleach Solution (5.25% – less than 1 part bleach to 100 parts water)

Avoid oversaturation and ensure the product does not stay wet longer than the chemical manufacturer's guidelines for proper disinfecting.

 **CAUTION**


SOME CLEANING PRODUCTS ARE CORROSIVE IN NATURE AND MAY CAUSE DAMAGE TO THE PRODUCT IF USED IMPROPERLY. If the products described above are used to clean Stryker patient care equipment, measures must be taken to insure the beds are wiped with clean water and thoroughly dried following cleaning. Failure to properly rinse and dry the beds will leave a corrosive residue on the surface of the bed, possibly causing premature corrosion of critical components. Failure to follow the above directions when using these types of cleaners may void this product's warranty.

For mattress cleaning instructions, please see the tag on the mattress, or contact the mattress manufacturer.


Clean Velcro® AFTER EACH USE. Saturate Velcro® with disinfectant and allow disinfectant to evaporate. (Appropriate disinfectant for nylon Velcro® should be determined by the hospital.)

Service Information


CASTER COVER INSTALLATION AND REMOVAL

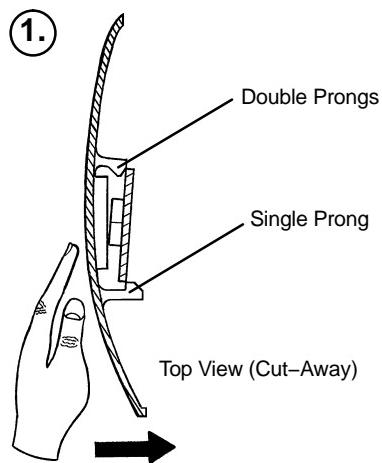

Looking through the larger of the two side cut-outs, align the cover with the axle nut or bolt head, as shown. Push down on the opposite side of the cover until the single prong engages the caster horn.

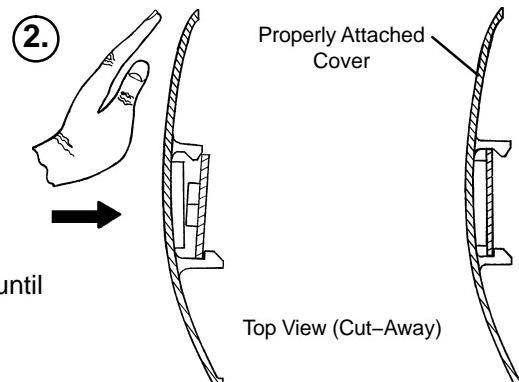

Push on the cover with your palm until the double prongs engage.

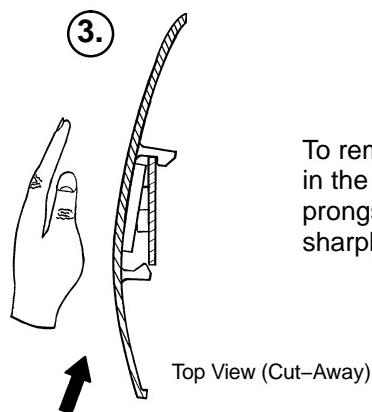

To remove the wheel cover, insert a large screwdriver into the cut-out in the side of the wheel cover and into the space between the double prongs. Pry up the cover to disengage the double prongs and push sharply upward to disengage the single prong.

CASTER REMOVAL

Required Tools:

9/16" Open End Wrench

1. Remove the caster cover.
2. While keeping pressure on the caster bolt with your index finger, use a 9/16" open end wrench to remove the nylock hex nut on top of the caster assembly.
3. Using the brake ring, lift up on the base assembly and pull the caster assembly down to remove it.
4. Reverse steps 1-3 to install the new caster.

Service Information

RELEASE PEDAL ADJUSTMENT

1. Manually disengage the release pedal swivel (item J on [page 27](#)) from the release pedal assembly.
2. To increase the release rod engagement with the release valve, turn the release pedal swivel clockwise on the threaded release rod.
3. To decrease the release rod engagement with the release valve, turn the release pedal swivel counter-clockwise on the threaded release rod.

NOTE

If the pedal swivel assembly is threaded too far onto the release rod, the release valve will be partially activated and the jack will drift.

BRAKE ROD REMOVAL

Required Tools:

| | | |
|--------|---|------------------------|
| Hammer | 7/32" Punch | String or Bungee Cords |
| 1. | Pump the litter up to full height. | |
| 2. | Lift the base hood and support it from the litter using string or bungee cords. | |
| 3. | Remove the hex head cap screws connecting the brake rod supports to the base frame. | |
| 4. | Remove the bolt connecting the drive link assembly to the fifth wheel cam. | |
| 5. | Remove the rue ring cotter and clevis pin connecting the rod end link to the side control link. | |
| 6. | Remove the rue ring cotter connecting the drive link assembly to the bearing pivot support on the base frame (under the brake ring weldment). | |
| 7. | Remove the three hex washer head screws holding the brake rod assembly to the base frame. | |
| 8. | Remove the slotted spring pins connecting the butterfly "V" pedals, drive link assemblies and side control link to the brake rod. | |
| 9. | Reverse steps 1–8 to reinstall the brake rod. When reinstalling the brake rod supports, torque the hex head cap screws to 12–15 ft.–lbs. | |

CAUTION

When reattaching the brake rod assembly to the base frame, set the torque specs **no higher** than 15 ft.–lbs. or damage could occur to the bolts.

Service Information

SIDE CONTROL BRAKE ROD REMOVAL

Required Tools:

Hammer 7/32" Punch Needle Nose Pliers String or Bungee Cords

1. Pump the litter up to full height.
2. Lift the base hood and support it from the litter using string or bungee cords.
3. Remove the rue ring cotter and clevis pin connecting the rod end link to the side control link.
4. Remove the four bolts holding the brake rod assembly to the base frame and remove the entire assembly.
5. Using a hammer and 7/32" punch, drive the slotted spring pin out of the butterfly "V" pedal on the patient's left side and remove the pedal,
6. Using a hammer and 7/32" punch, drive the slotted spring pin out of the hard stop in the center of the support weldment.
7. Using a hammer and 7/32" punch, drive out the slotted spring pin connecting the side control link to the side control brake rod on the patient's right side.
8. Pull on the butterfly "V" pedal on the patient's right side to remove the side control brake rod from the base.
9. Reverse steps 1–8 to reinstall the brake rod. When reinstalling the assembly, torque the hex head cap screws to 12–15 ft.–lbs.

CAUTION

When reattaching the brake rod assembly to the base frame, set the torque specs **no higher** than 15 ft.–lbs. or damage could occur to the bolts.

Service Information

FOOT END RELEASE PEDAL REPLACEMENT

Required Tools:

Needle Nose Pliers

1. Apply the stretcher brakes.
2. Disconnect the release pedal return springs from the foot end release pedals.
3. Remove the rue ring cotters and the clevis pins connecting the foot end release pedals to the mounting bracket.
4. Rotate the pedals upward.
5. Remove the rue ring cotters connecting the head end and foot end release rods to the foot end release pedals and remove the pedals.
6. Reverse steps 2–5 to install the new pedals.

FOOT END RELEASE PEDAL ROD REMOVAL

Required Tools:

Needle Nose Pliers

1. Remove the foot end release pedal (see procedure above).
2. Remove the snap in nyliners holding the foot end pedal release rods in the pedal mounting bracket.
3. Unsnap the foot end pedal release rods from the white plastic release rod brackets.
4. Dislodge the side control release pedal swivels from the studs on the side control release pedal weldments.
5. Remove the foot end pedal release rods.
6. Reverse steps 1–5 to reinstall the pedal rods.

Service Information

BRAKE RING REMOVAL

Required Tools:

9/16" Socket w/Extension 3/8" Drive Ratchet Needle-Nose Pliers String or Bungee Cord

1. Pump the litter up to full height.
2. Lift the base hood and support it from the litter using string or bungee cords.
3. Using needle-nose pliers, unhook the extension springs from the top of the base caster tubes.
4. Remove the plastic caster covers.
5. While putting pressure on the caster carriage bolt, use a 9/16" socket and a 3/8" drive ratchet to remove the caster nut on both sides of the stretcher.
6. Remove the casters.
7. Remove the brake rod (see procedure).
8. Remove the cotter pin from the clevis pin in the center of the brake ring weldment.
9. Remove the cotter pin from the bearing pivot support.
10. Remove the 3/4" nylock hex nut from the bearing pivot support.
11. Remove the drive link assembly.
12. Pull the brake ring down and out away from the stretcher base frame.
13. Reverse steps 1–12 to reinstall the brake ring.

FIFTH WHEEL ASSEMBLY REMOVAL

Required Tools:

1/2" Socket 3/8" Drive Ratchet

1. Using a 1/2" socket and 3/8" drive ratchet, remove the 1/2" bolt holding the fifth wheel cam drive link and fifth wheel drive link to the fifth wheel cam.
2. Remove the two 1/2" bolts holding the fifth wheel mounting bracket to the base frame weldment.
3. Remove the fifth wheel assembly.
4. Reverse steps 1 and 2 to reinstall the fifth wheel. When reinstalling the assembly, torque the hex head cap screws to 12–15 ft.–lbs.

CAUTION

When reattaching the fifth wheel assembly to the base frame, set the torque specs **no higher** than 15 ft.–lbs. or damage could occur to the bolts.

Service Information

LITTER TOP REMOVAL

Required Tools:

1/2" Socket w/Extension 3/8" Drive Ratchet Standard Screwdriver

1. Using the foot pedal, pump up the litter top to full height.
2. Remove the stretcher mattress
3. Remove the round, black hole plugs from the jack supports at each end of the litter to expose the jack support tube truss head screws.
4. Using a 1/2" socket, and a 3/8" drive ratchet, remove the truss head screws holding the jack support tubes to the jack shafts.
5. Thread a 7/16-20 fine thread bolt far enough into the top of the jack supports to separate the litter top from the jack shaft.
6. With the assistance of another person, lift the litter straight up to remove it from the jack shafts and set it aside.

REMOVAL OF EXCESS AIR (VACUUM) FROM THE HYDRAULIC SYSTEM

1. Verify all hydraulic linkages are secure and operating properly.
2. Using the pump pedal, actuate the system several times to force the air through the system. The jack should now raise properly.

JACK DESCENT RATE ADJUSTMENT

Required Tools:

Screwdriver Bungee Cords (or equivalent)

Adjustment Procedure:

1. Pump the litter up to full height.
2. Lift the base hood, separating the hood from the base frame. Support the hood from the litter using bungee cords so it is out of the way.
3. The descent rate needle valve is located on the base of the jack. Turning the needle valve clockwise, with a screwdriver, will decrease the rate of descent. Turning it counterclockwise will increase the rate of descent.

NOTE

The larger percentage of a patient's weight is located in the torso area. Adjust descent rate accordingly.

4. Remove the bungee cords supporting the base hood and secure the hood to the base frame.

NOTE

The jack descent rate is preset at the factory and adjustment is not recommended.

Service Information

FOOT END HYDRAULIC JACK REMOVAL

Required Tools:

1/2" Socket

3/8" Drive Ratchet

Pliers

1. Remove the litter top (see [page 11](#)).
2. Lift the base hood off the base frame.
3. Remove the two hex washer head screws and washers connecting the pump pedal link to the foot end pump pedal assembly and pump connecting rod.
4. Remove the foot end release rod from the release valve on the jack assembly by dislodging the release pedal swivel from the pins on the release pedal weldment.
5. Dislodge the jack pump piston from the pump connecting rod.
6. Remove the two hex washer head screws holding the reservoir clamp.
7. Remove the jack assembly.
8. Reverse steps 1–7 to install the new jack.

NOTE

The jack descent rate is preset at the factory and adjustment is not recommended.

HEAD END HYDRAULIC JACK REMOVAL

Required Tools:

1/2" Socket w/Extension

3/8" Drive Ratchet

1. Remove the litter from the stretcher (see [page 11](#)).
2. Using a 1/2" socket with extension and a 3/8" drive ratchet, remove the two hex head screws holding the jack base to the stretcher base frame.
3. Remove the two hex head screws holding the jack reservoir clamp to the base frame and remove the clamps.
4. Lift straight up on the pump connecting rod and disconnect the pump piston from the connecting rod.
5. Disconnect the pump pedal swivel from the release pedal mounting plate.
6. Remove the head end release rod from the release valve assembly.
7. Using a 1/2" socket with extension and a 3/8" drive ratchet, remove the two hex head screws holding the jack base to the stretcher base frame.
8. Lift out the jack assembly.
9. To reinstall the jack, install the bolts on the jack and reservoir clamp but do not tighten them fully.
10. Reinstall the pump connecting rod and release rod.
11. Depress the pump pedal fully (to the floor). This will properly locate the jack onto the base frame.
12. Tighten the bolts on the jack and reservoir clamp.
13. Pump up the litter and apply weight to verify the jacks hold and do not drift.

NOTE

The jack descent rate is preset at the factory and adjustment is not recommended.

Service Information

SIDERAIL LATCH ADJUSTMENT

Required Tools:

1/8" Hex Allen Wrench

WARNING

The siderail latches are pre-set at the factory, and do not normally need adjustment. If adjustment must be done it is important to follow the procedure below. If it is not done properly, injury to the patient or user could occur.

Adjustment Procedure:

1. Using a 1/8" hex Allen wrench, adjust the hex Allen screw located on the latch assembly opposite the latch. Turning the screw clockwise will **DECREASE** the amount of play in the latching mechanism. Turning counterclockwise will **INCREASE** the amount.

NOTE

The amount of play in the siderail, when in full up engaged position, should be approximately 1/8 to 3/16 inches.

CAUTION

Too much play when the siderail is in the full up engaged position will give the siderail the appearance of being unstable and could also cause premature wearing of the latch system.

Too little play will obstruct the latch and keep it from engaging completely in the full up position, which may cause damage to the latch and/or injury to the patient or user.

ARM BOARD COUNTERBALANCE ADJUSTMENT

Required Tools:

7/16" Open End Wrench

Adjustment Procedure:

1. Raise the arm board to the full up position.
2. Unhook the extension spring at the eye bolt.
3. Using a 7/16" open end wrench, loosen the jam nut at the eye bolt.
4. Adjust the eye bolt to the desired position.
5. Tighten the jam nut.
6. Hook the extension spring to the eye bolt.
7. Allow the arm board to lower on its own.
8. Repeat steps 1–7 until the desired counterbalance is achieved.

Service Information


PNEUMATIC FOWLER ADJUSTMENT

Required Tools:

(2) 3/8" Open End Wrenches

Adjustment Procedure:

1. Apply the stretcher brakes.
2. Pump the stretcher litter up to full height.
3. Move the Fowler to 70° or higher.
4. Using (2) 3/8" wrenches, loosen the two nuts (A) on the adjustment screw (B). If the Fowler is not holding its position, turn the adjustment screw up, away from the release pin on the pneumatic cylinder (C). If the Fowler is not releasing, turn the adjustment screw down, toward the release pin on the pneumatic cylinder. Tighten the two nuts. Repeat for the other side of the Fowler.
5. To verify both sides of the Fowler are releasing equally, raise the Fowler to the full up position. Using two hands, pull down on both sides of the Fowler, squeeze both release handles and verify both pneumatic cylinders release equally. If they do not, repeat step 4. When proper Fowler adjustment has been verified, return the stretcher to service.

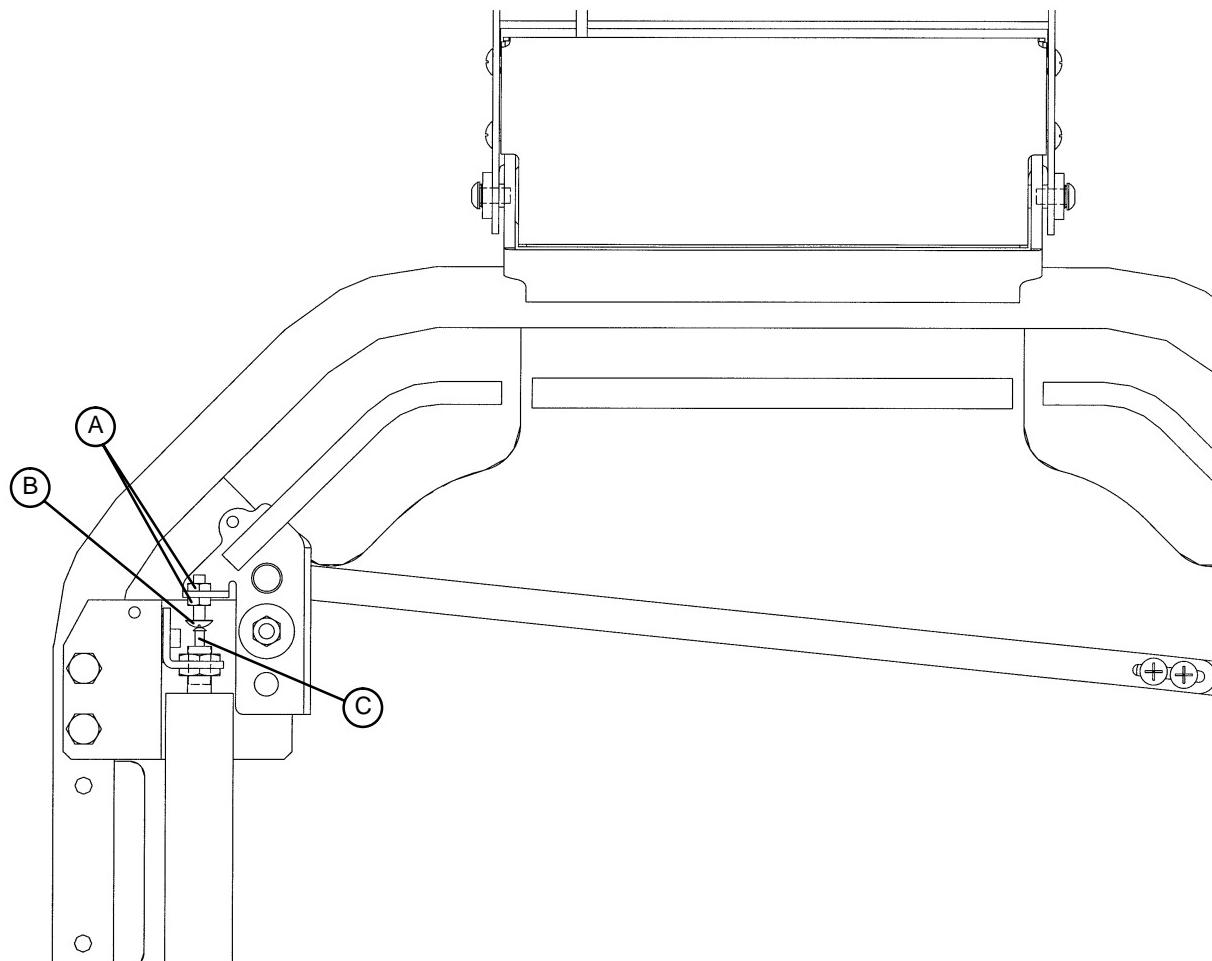

Service Information


PNEUMATIC FOWLER RELEASE HANDLE ADJUSTMENT

Required Tools:

#2 Phillips Screwdriver

Adjustment Procedure:

1. Apply the stretcher brakes.
2. Loosen the two Phillips head screws on the handle linkage. Release the handle tension spring on the patient's left side.
3. Adjust the handles so there is a 3/4" gap between the inner Fowler frame and the handle.
4. Tighten the two screws on the handle linkage bar and reattach the spring.
5. It may be necessary to adjust the pneumatic cylinders (see [page 14](#)).
6. Verify proper Fowler operation before returning the stretcher to service.

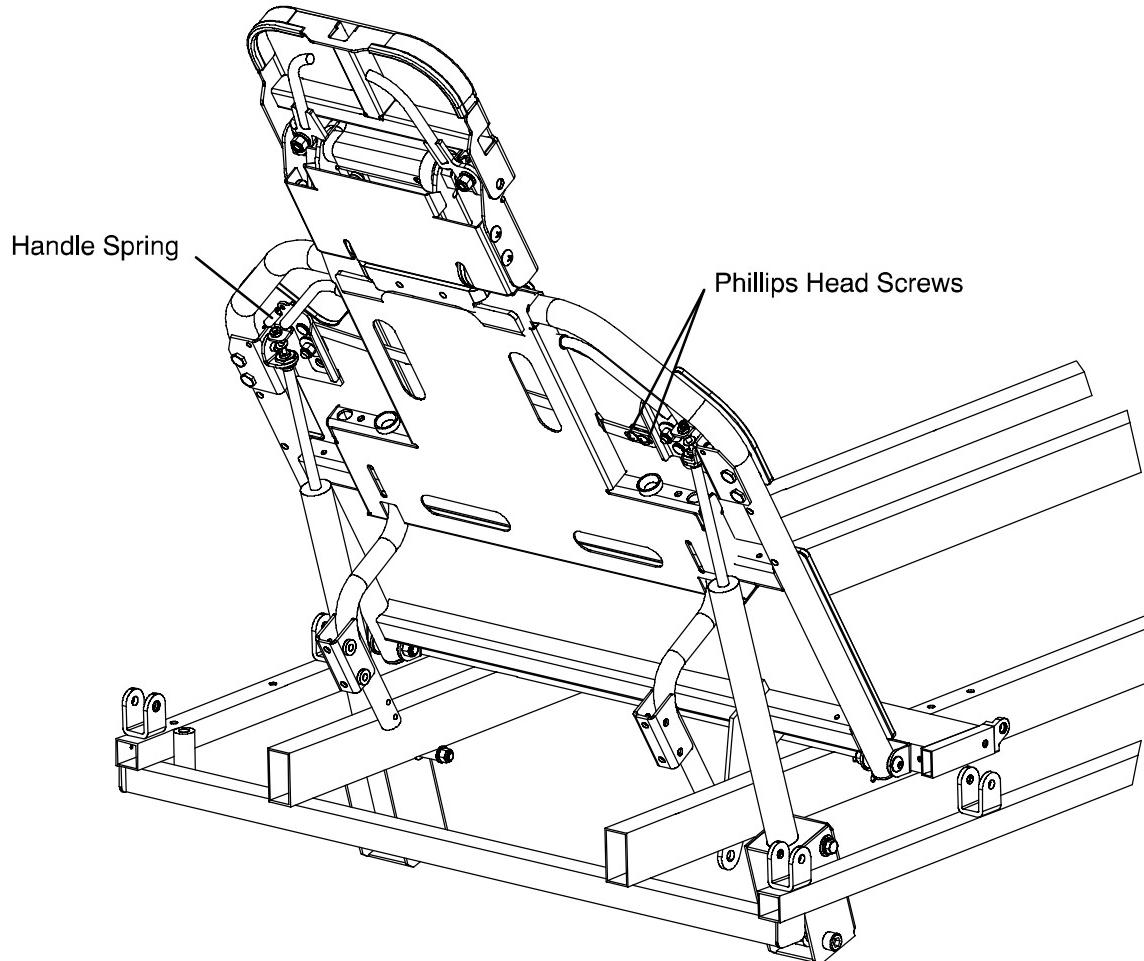

Service Information


PNEUMATIC CYLINDER REPLACEMENT

Required Tools:

(2) 17 mm. Wrenches 11/16" Open End Wrench 5/16" Hex Allen Wrench

Adjustment Procedure:

1. Apply the stretcher brakes.
2. Pump the litter up to full height.
3. Move the Fowler to 70°.
4. Using two 17 mm. wrenches, remove both the large nuts (A) from the top of the pneumatic cylinder.
5. Using a 5/16" hex Allen wrench and an 11/16" open end wrench, remove the nut (B) and bolt (C) from the bottom of the cylinder.
6. Raise the Fowler to 90° and remove the cylinder.
7. Press down on the release pin on the replacement cylinder to fully extend the cylinder.
8. Put the large nut on the new cylinder and screw it down securely.
9. Using a 5/16" hex Allen wrench and an 11/16" open end wrench, install the nut (B) and bolt (C) on the bottom of the cylinder.
10. Check the Fowler adjustment (see [page 14](#)) before returning the stretcher to service.

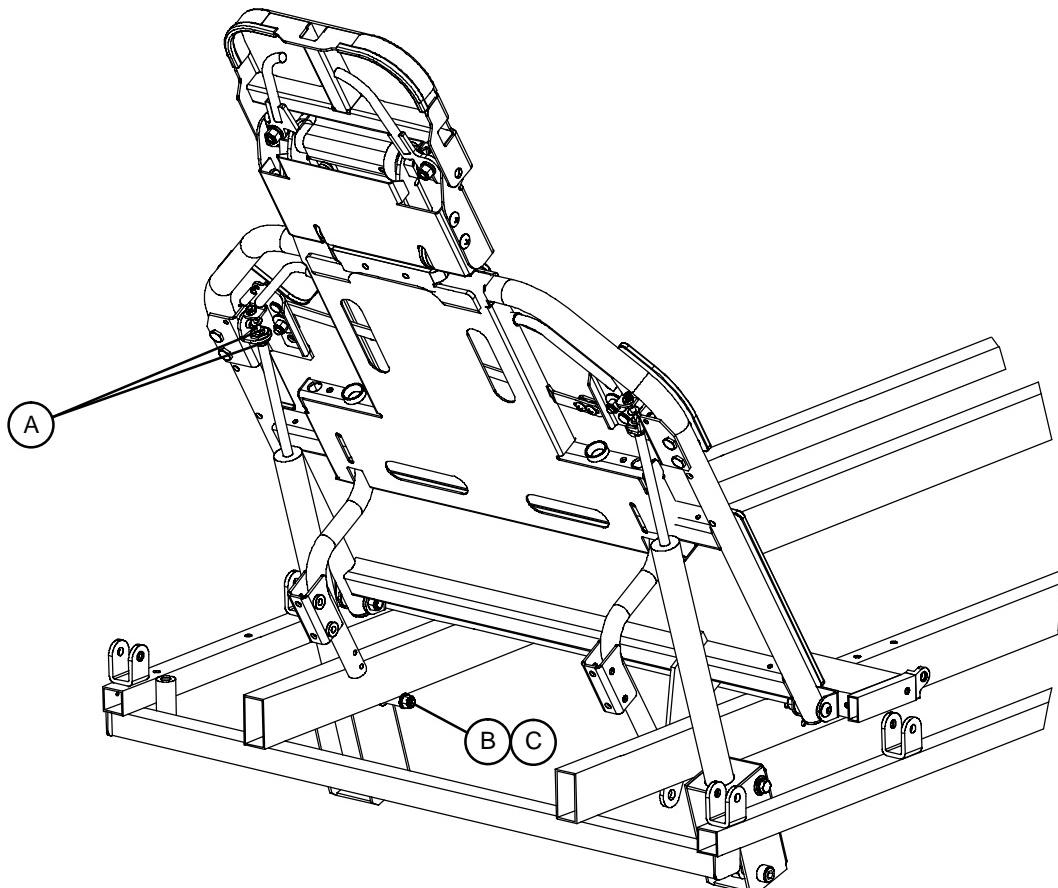


Quick Reference Replacement Parts List

| <u>PART NAME</u> | <u>PART NUMBER</u> |
|--|--------------------|
| Arm Board Clamp | 1068-054-010 |
| Caster Cover Kit | 1010-056-200 |
| Foot Board/Chartholder | 0741-034-100 |
| Foot Board/Defibrillator Tray | 1010-050-100 |
| Fowler Release Handle Kit | 1069-700-003 |
| Head/Foot Board | 0741-029-100 |
| Head Pad, 2" Concave | 1069-081-000 |
| Head Pad, 3" Concave | 1069-181-000 |
| Head Pad, 1" Flat | 1069-078-000 |
| Head Pad, 2" Flat | 1069-179-000 |
| Head Pad, 3" Flat | 1069-180-000 |
| Head Pad, 3" Inflatable, Ultra-Comfort | 1069-082-000 |
| Head Pad, Inflatable, Non-Latex Bulb Only | 1066-082-020 |
| Hydraulic Jack, Constant Descent | 0753-002-001 |
| IV Pole, Standard Removable | 0390-025-000 |
| IV Pole, 2-Stage Permanent, Foot End | 1010-080-100 |
| IV Pole, 3-Stage Permanent, Foot End | 1020-062-000 |
| Mattress, 2" Thick x 26" Wide, Standard, Dual Articulation | 1069-026-050 |
| Mattress, 3" Thick x 26" Wide, Standard, Dual Articulation | 1069-026-060 |
| Mattress, 4" Thick x 26" Wide, Standard, Dual Articulation | 1069-026-090 |
| Mattress, 3" Thick x 26" Wide, Enhanced Comfort, Dual Articulation | 1069-026-070 |
| Mattress, 4" Thick x 26" Wide, Enhanced Comfort, Dual Articulation | 1069-026-080 |
| Mattress, 3" Thick x 26" Wide, Standard, Zero Articulation | 1069-026-010 |
| Mattress, 3" Thick x 26" Wide, Enhanced Comfort, Zero Articulation | 1069-026-020 |
| Mattress, 4" Thick x 26" Wide, Enhanced Comfort, Zero Articulation | 1069-026-030 |
| Neck Pad, Enhanced Clearance Only | 1068-236-010 |
| Pads, Pre-Op/Post-Op Head Piece, 2" | 1069-062-000 |
| Pads, Pre-Op/Post-Op Head Piece, 3" | 1069-060-000 |
| Pads, Pre-Op/Post-Op Head Piece, 3", Ultra-Comfort | 1069-063-000 |
| Pads, Pre-Op/Post-Op Head Piece, 4" Enhanced Comfort | 1069-064-000 |
| Pads, Pre-Op/Post-Op Head Piece, 4" Ultra-Comfort | 1069-064-005 |
| Paint, Touch-Up, Gloss Black, Bottle w/Brush | 7000-001-322 |
| Paint, Touch-Up, Gloss Black, Spray Can | 7000-001-319 |
| Paint, Touch-Up, Gray, Bottle w/Brush | 7000-001-320 |
| Paint, Touch-Up, Gray, Spray Can | 7000-001-317 |
| Restraint Strap, Ankle | 0946-043-100 |
| Restraint Strap, Body | 0390-019-000 |
| Restraint Strap, Chest | 1010-058-000 |
| Restraint Strap, Wrist | 0946-044-100 |
| Restraint Straps, Full Patient Security Package | 1010-077-000 |
| Siderail Pads | 1010-052-000 |

Notes

Base Assembly with Foot End Brakes

Assembly part number
0753-003-134
(reference only)

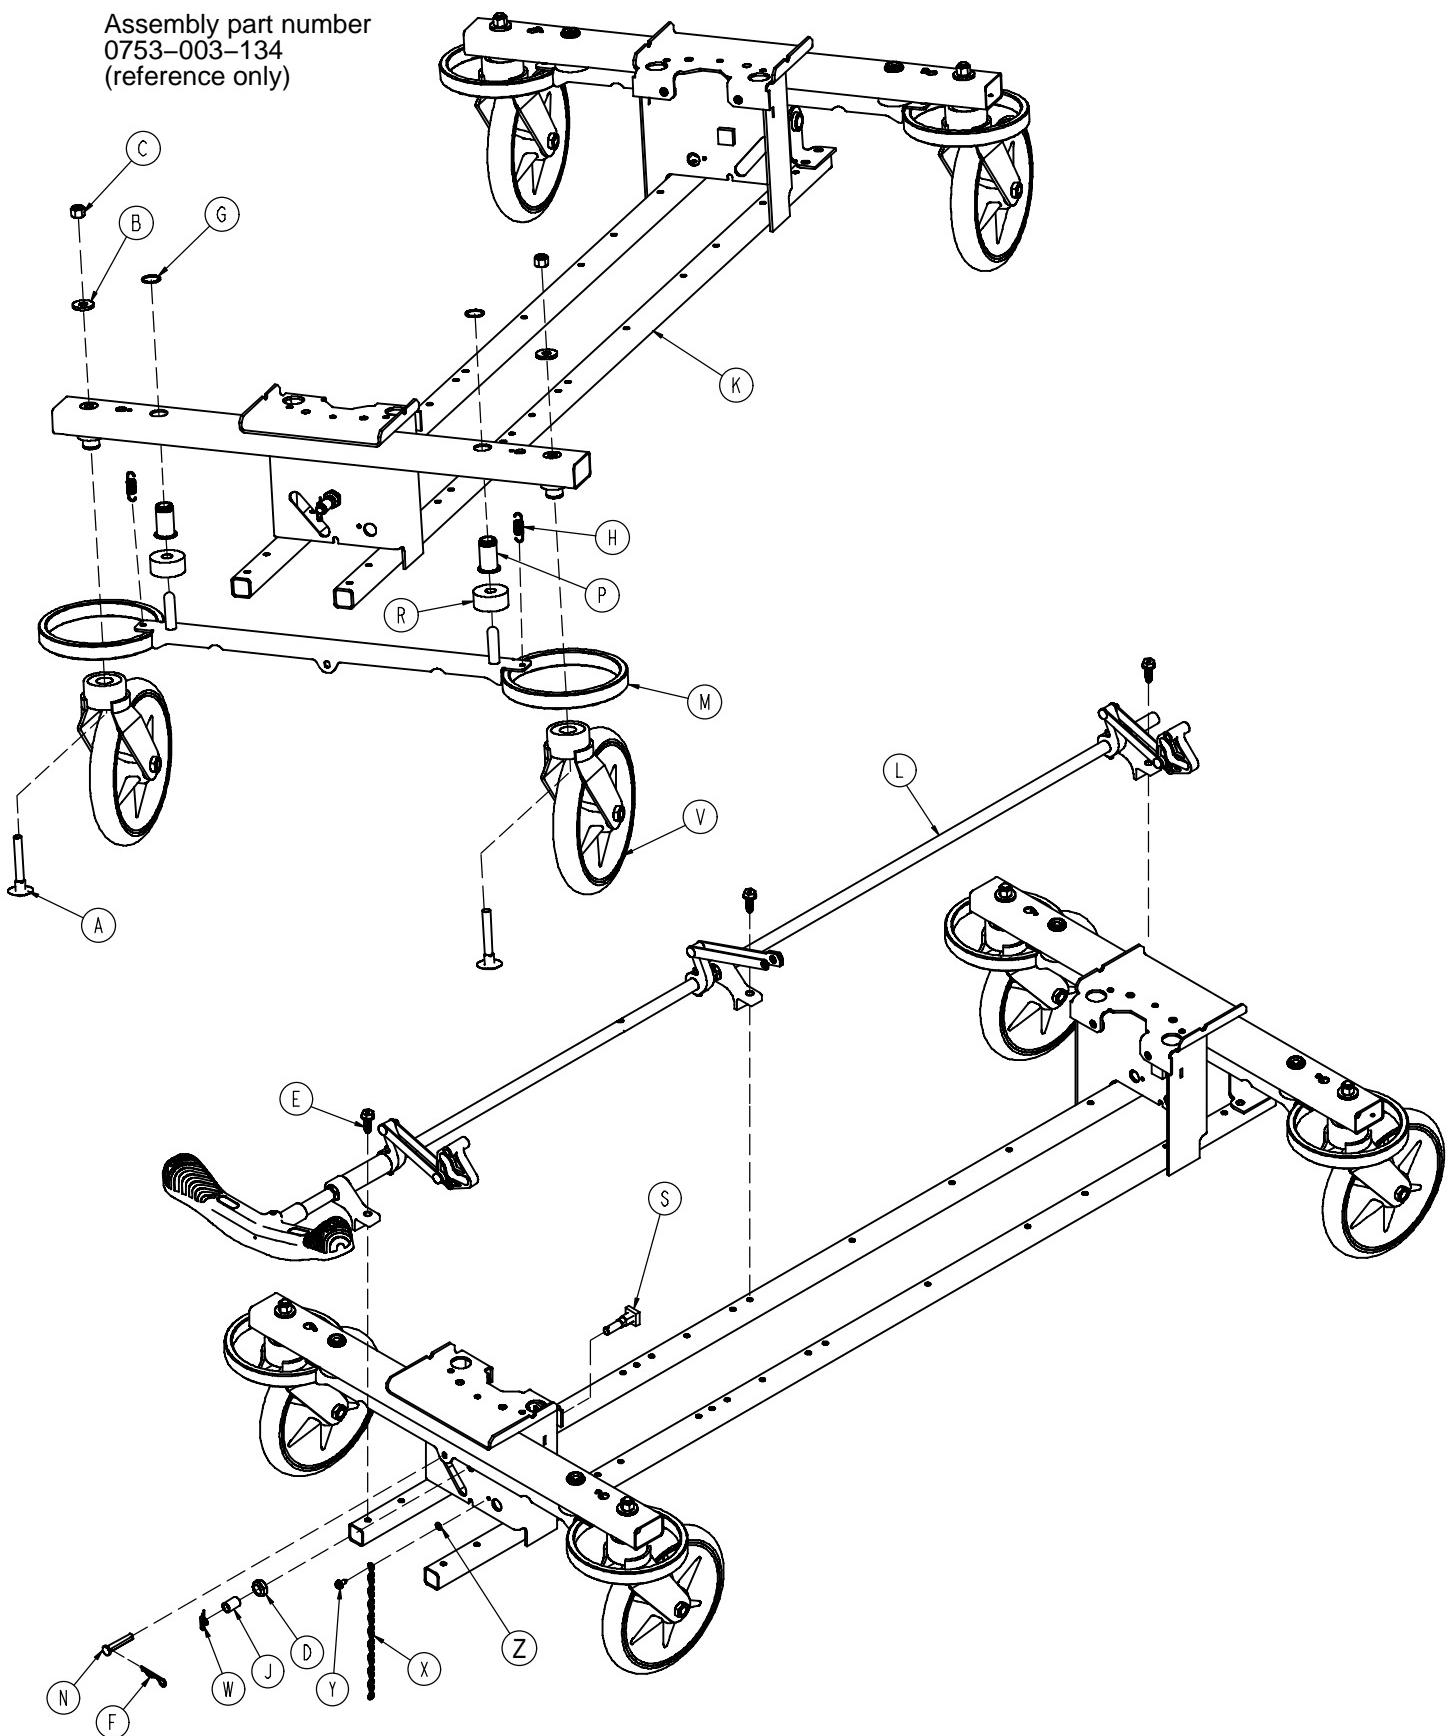


Base Assembly with Foot End Brakes

| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------------|------|
| A | 0005-044-000 | Step Bolt | 4 |
| B | 0011-262-000 | Washer | 4 |
| C | 0016-035-000 | Nylock Hex Nut | 4 |
| D | 0016-049-000 | Nylock Hex Nut | 2 |
| E | 0023-288-000 | Hex Washer Hd. Screw | 3 |
| F | 0027-012-000 | Hitch Pin | 2 |
| G | 0028-037-000 | External Retaining Ring | 4 |
| H | 0038-439-000 | Extension Spring | 4 |
| J | 0081-037-000 | Roller Bearing | 2 |
| K | 0753-001-001 | Base Frame | 1 |
| L | (page 21) | Brake Rod Assembly | 1 |
| M | 0753-003-006 | Brake Ring | 2 |
| N | 0753-003-066 | Clevis Pin | 2 |
| P | 0753-003-079 | Caster Tube Brake Pin Guide | 4 |
| R | 0753-003-121 | Brake Cushion | 4 |
| S | 0753-003-230 | Bearing Pivot Support | 2 |
| V | (page 37) | Caster Assembly | 4 |
| W | 0027-022-000 | Rue Ring Cotter Pin | 2 |
| X | 3001-200-052 | Ground Chain | 1 |
| Y | 0003-364-000 | Hex Head Washer Screw | 1 |
| Z | 0013-018-000 | External Tooth Lock Washer | 1 |

Brake Rod Assembly (Foot End Brakes)


Assembly part number 0753-003-135 (reference only)

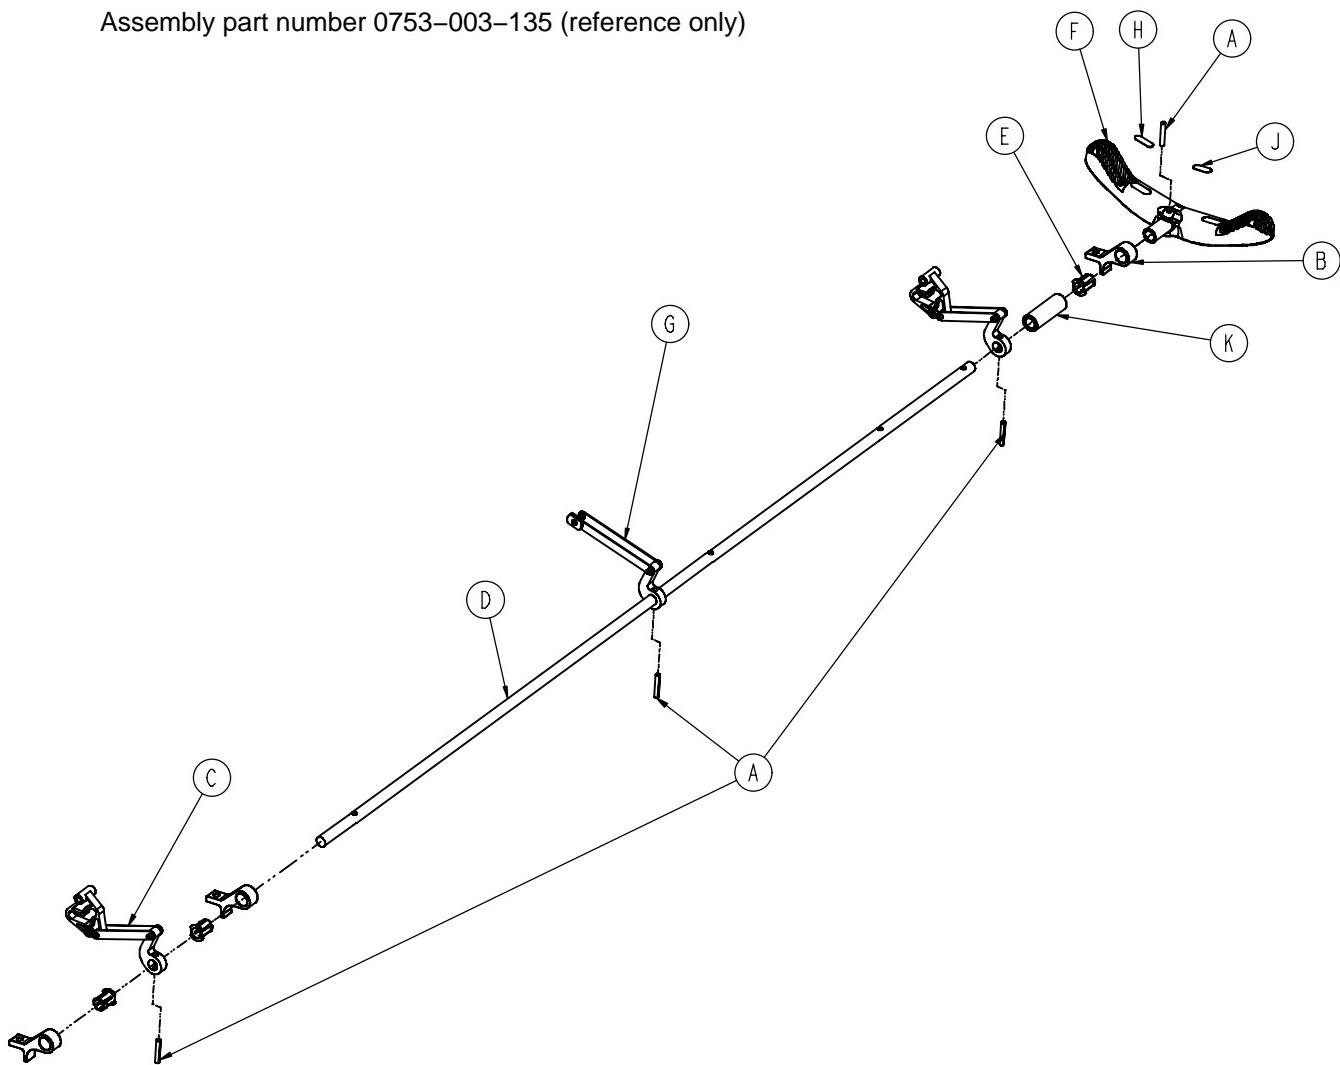


| Item | Part No. | Part Name | Qty. |
|----------------|--------------|---------------------|------|
| A | 0026-067-000 | Slotted Spring Pin | 4 |
| B | 0753-003-004 | Brake Rod Support | 3 |
| C (page 35) | | Drive Link Assembly | 2 |
| D | 0753-003-137 | Brake Rod | 1 |
| E | 0753-003-015 | Brake Rod Nyliner | 3 |
| F | 0753-003-099 | Butterfly "V" Pedal | 1 |
| G (page 36) | | Drive Link Assembly | 1 |
| H | 1210-201-335 | Red Brake Label | 1 |
| J | 1210-201-336 | Green Steer Label | 1 |
| K | 0753-003-133 | Retention Spacer | 1 |

Base Assembly with Foot End and Side Control Brakes

Assembly part number
0753-003-138
(reference only)

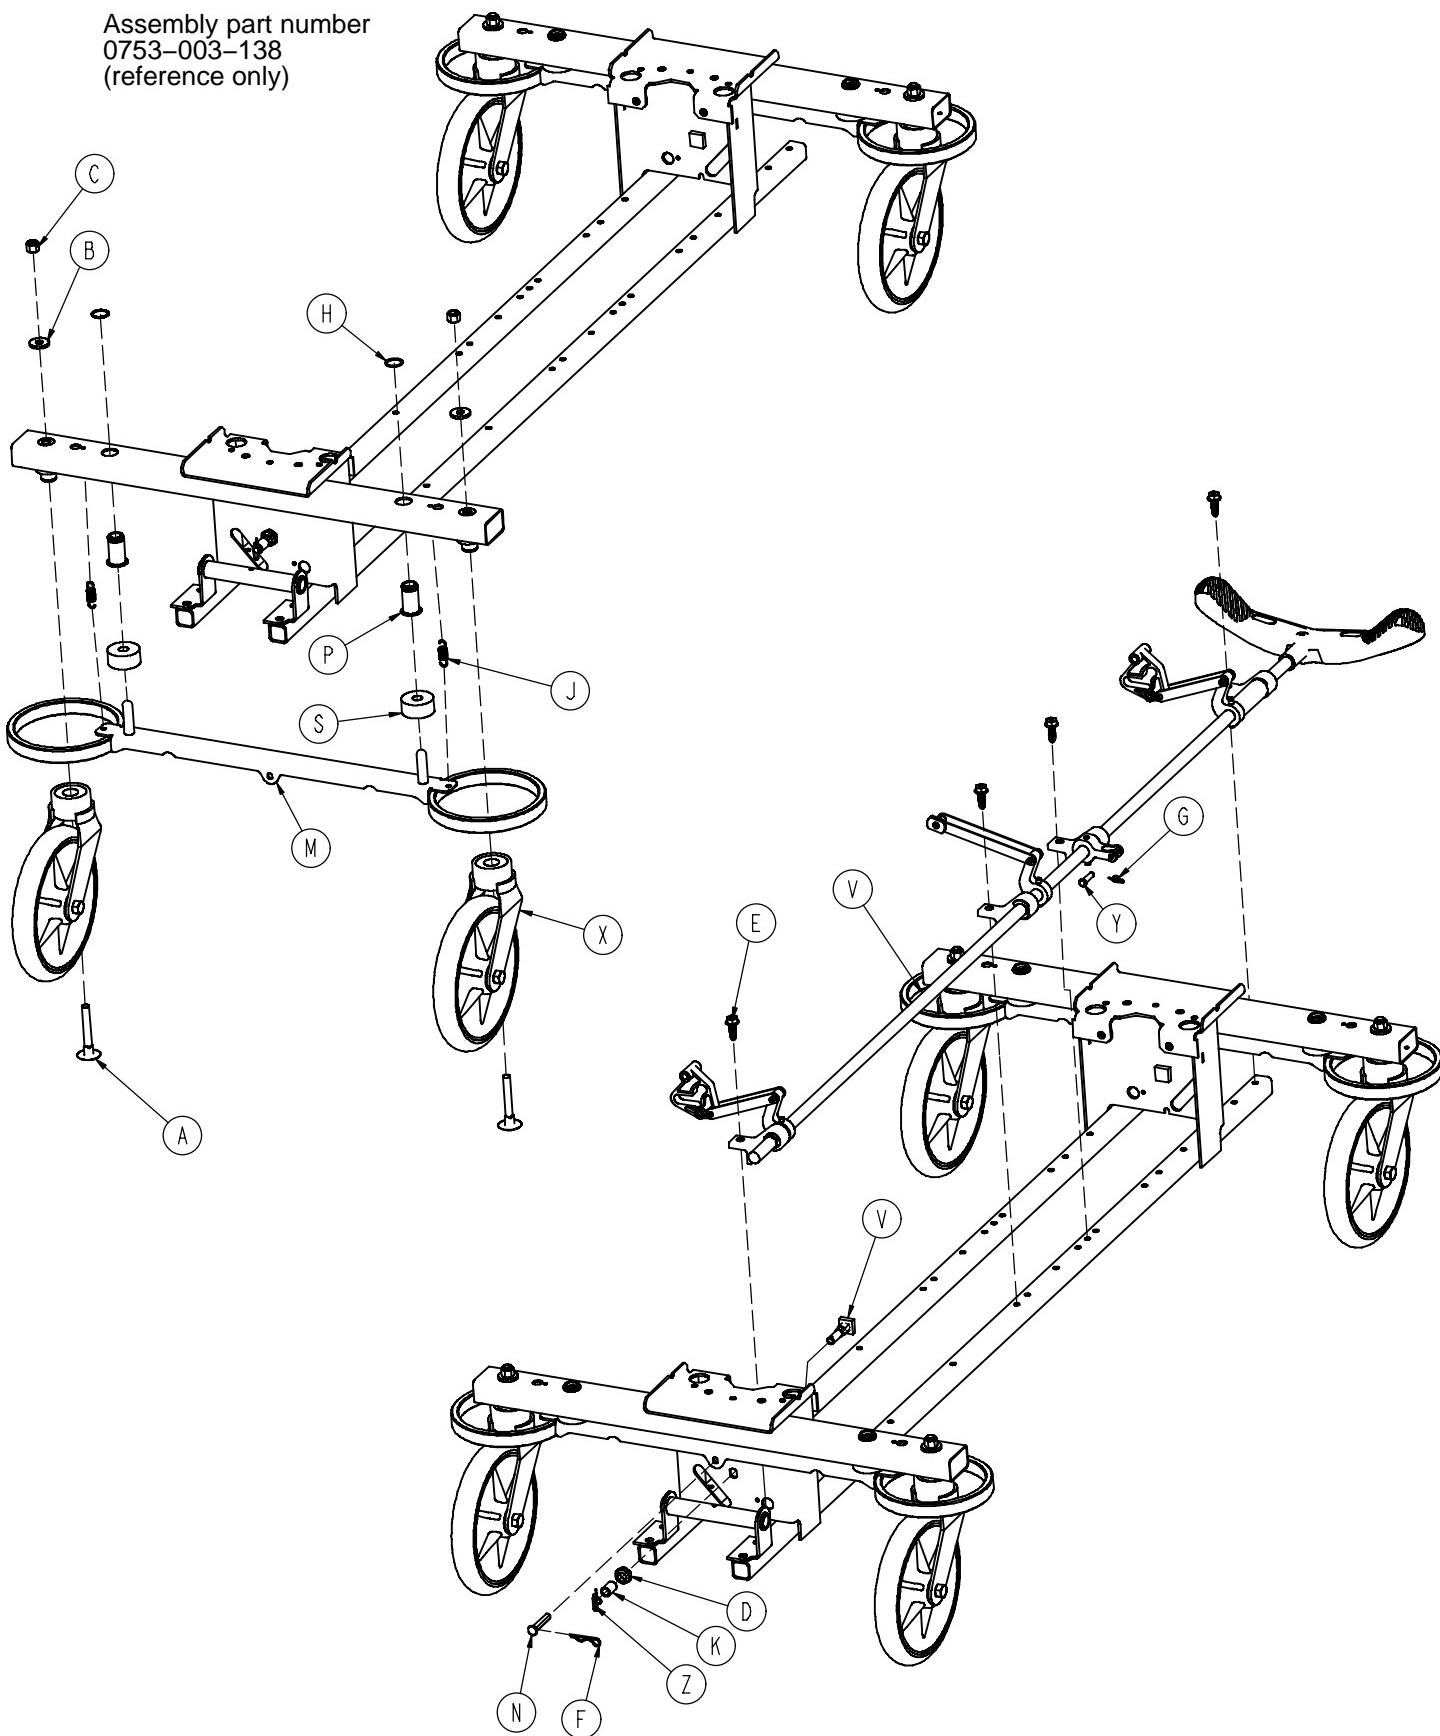


Base Assembly with Foot End and Side Control Brakes

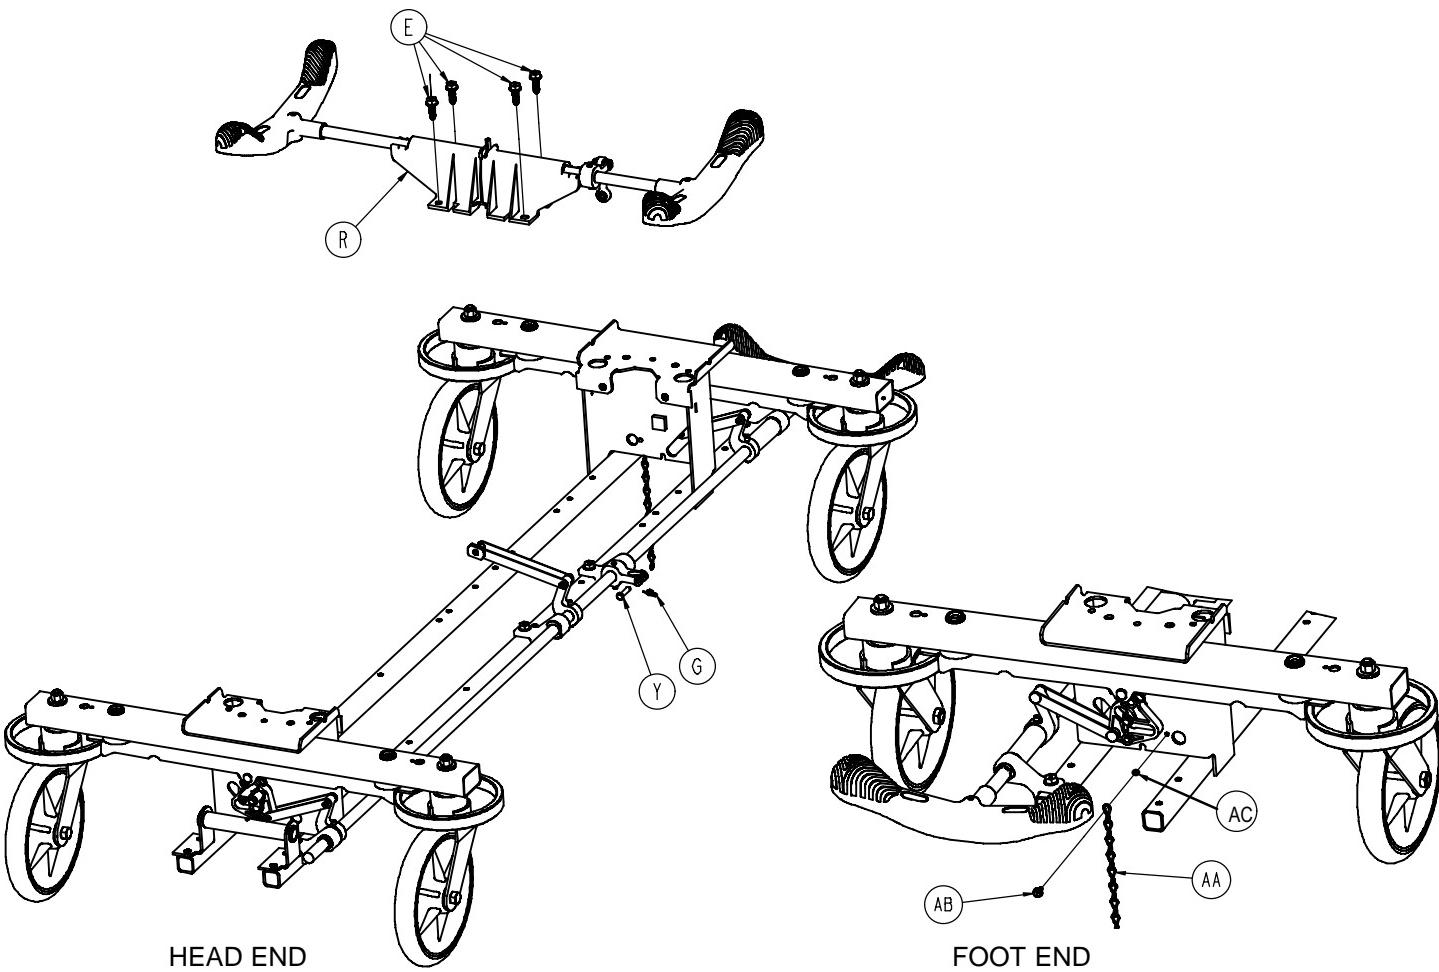

| Item | Part No. | Part Name | Qty. | Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------|------|------|--------------|--------------------------|------|
| A | 0005-044-000 | Step Bolt | 4 | N | 0753-003-066 | Clevis Pin | 2 |
| B | 0011-262-000 | Washer | 4 | P | 0753-003-079 | Cast. Tube Br. Pin Guide | 4 |
| C | 0016-035-000 | Nylock Hex Nut | 4 | R | (page 24) | Brake Rod Assembly | 1 |
| D | 0016-049-000 | Nylock Hex Nut | 2 | S | 0753-003-121 | Brake Cushion | 4 |
| E | 0023-288-000 | Hex Washer Hd. Screw | 8 | T | (page 25) | Brake Rod Assembly | 1 |
| F | 0027-012-000 | Hitch Pin | 2 | V | 0753-003-230 | Bearing Pivot Support | 2 |
| G | 0027-020-000 | Rue Ring Cotter | 1 | X | (page 37) | Caster Assembly | 4 |
| H | 0028-037-000 | External Retaining Ring | 4 | Y | 0026-340-000 | Clevis Pin | 1 |
| J | 0038-439-000 | Extension Spring | 4 | Z | 0027-022-000 | Rue Ring Cotter Pin | 2 |
| K | 0081-037-000 | Roller Bearing | 2 | AA | 3001-200-052 | Ground Chain | 1 |
| L | 0753-001-001 | Base Frame | 1 | AB | 0003-364-000 | Hex Head Washer Screw | 1 |
| M | 0753-003-006 | Brake Ring | 2 | AC | 0013-018-000 | Ext. Tooth Lock Washer | 1 |


0753-003-210 Side Control Brake Rod Assembly

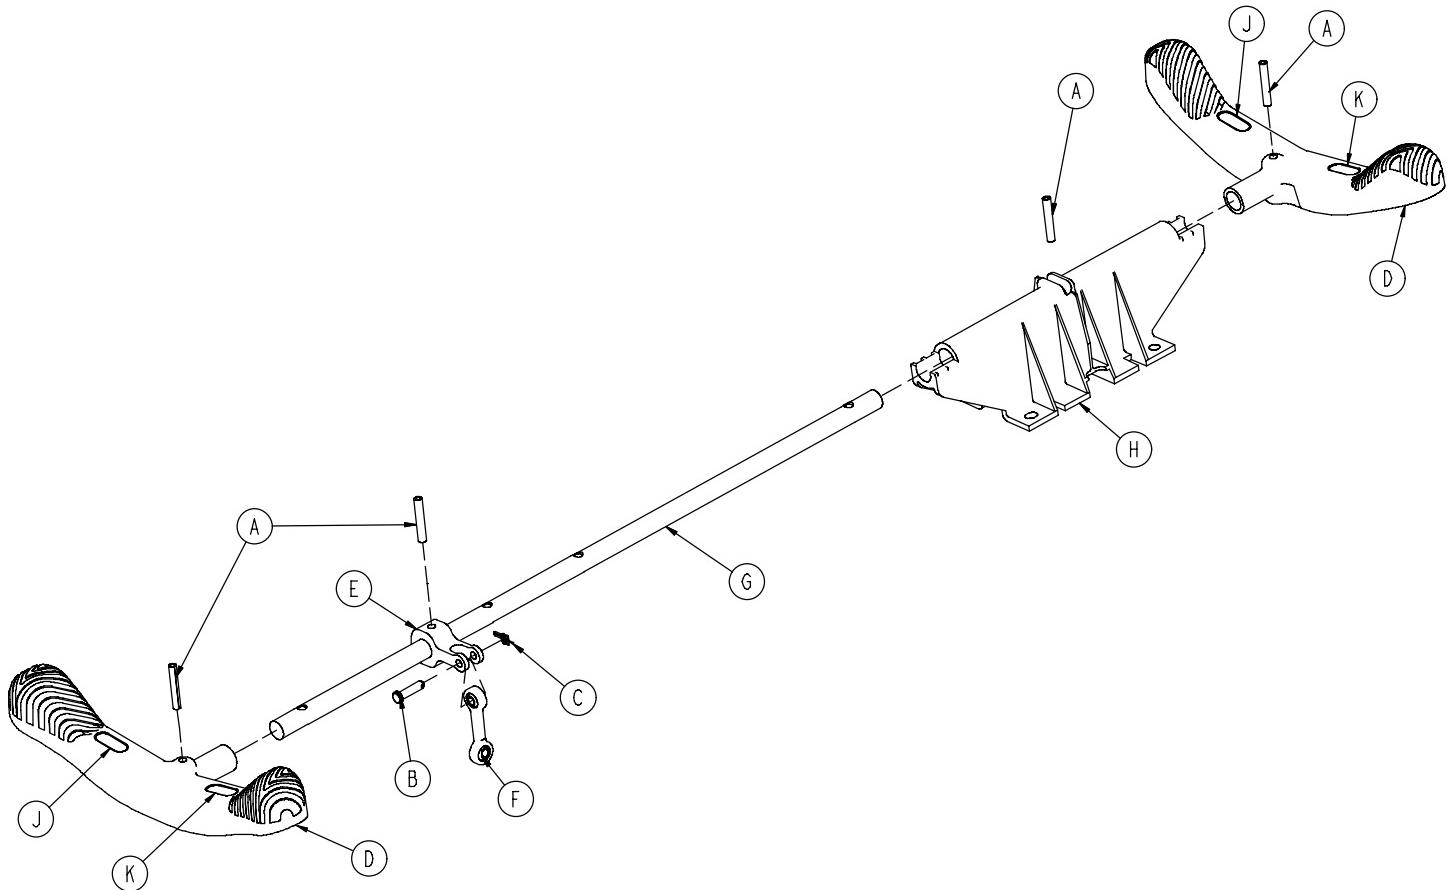

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 0026-067-000 | Slotted Spring Pin | 4 |
| B | 0026-340-000 | Clevis Pin | 1 |
| C | 0027-020-000 | Rue Ring Cotter | 1 |
| D | 0753-003-099 | Butterfly "V" Pedal | 2 |
| E | 0753-003-112 | Side Control Link | 1 |
| F | 0753-003-117 | Rod End Link | 1 |
| G | 0753-003-119 | Side Control Brake Rod | 1 |
| H | 0753-003-214 | Shaft Support | 1 |
| J | 1210-201-335 | Red Brake Label | 2 |
| K | 1210-201-336 | Green Steer Label | 2 |

Brake Rod Assembly


Assembly part number 0753-003-136 (reference only)

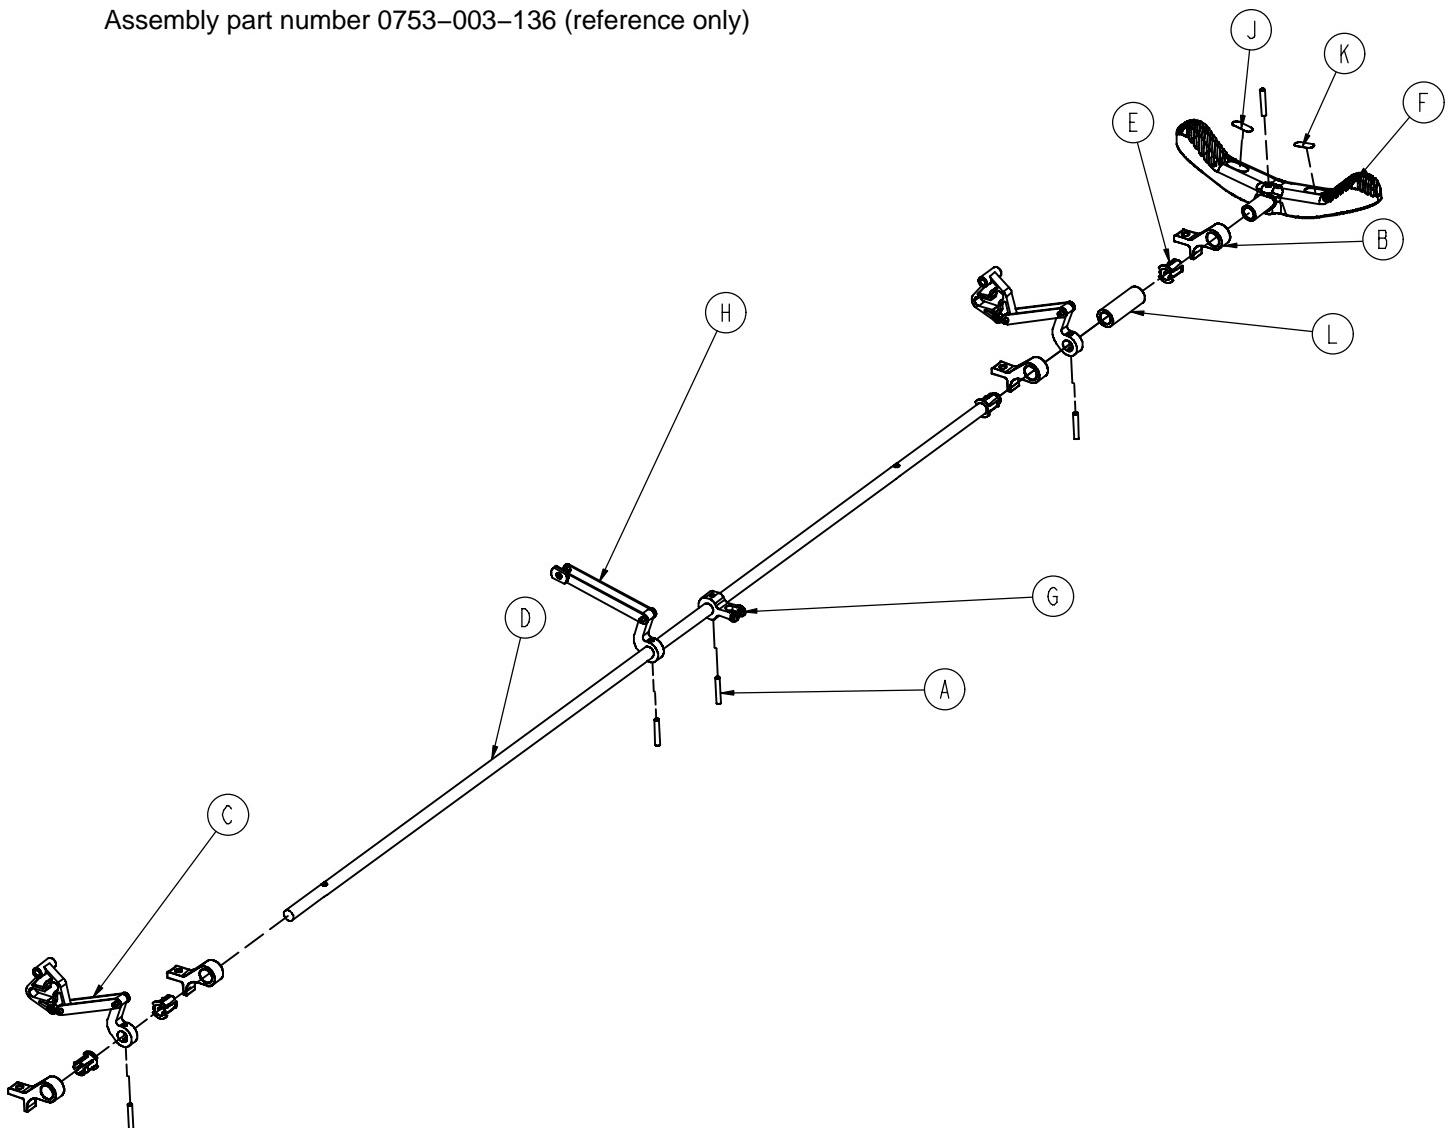


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------|------|
| A | 0026-067-000 | Slotted Spring Pin | 6 |
| B | 0753-003-004 | Brake Rod Support | 4 |
| C | (page 35) | Drive Link Assembly | 2 |
| D | 0753-003-137 | Brake Rod | 1 |
| E | 0753-003-015 | Brake Rod Nyliner | 4 |
| F | 0753-003-099 | Butterfly "V" Pedal | 1 |
| G | 0753-003-112 | Side Control Link | 1 |
| H | (page 36) | Drive Link Assembly | 1 |
| J | 1210-201-335 | Red Brake Label | 1 |
| K | 1210-201-336 | Green Steer Label | 1 |
| L | 0753-003-133 | Retention Spacer | 1 |

Base with Dual Side Hydraulics


Assembly part number 0753-005-200 (reference only)

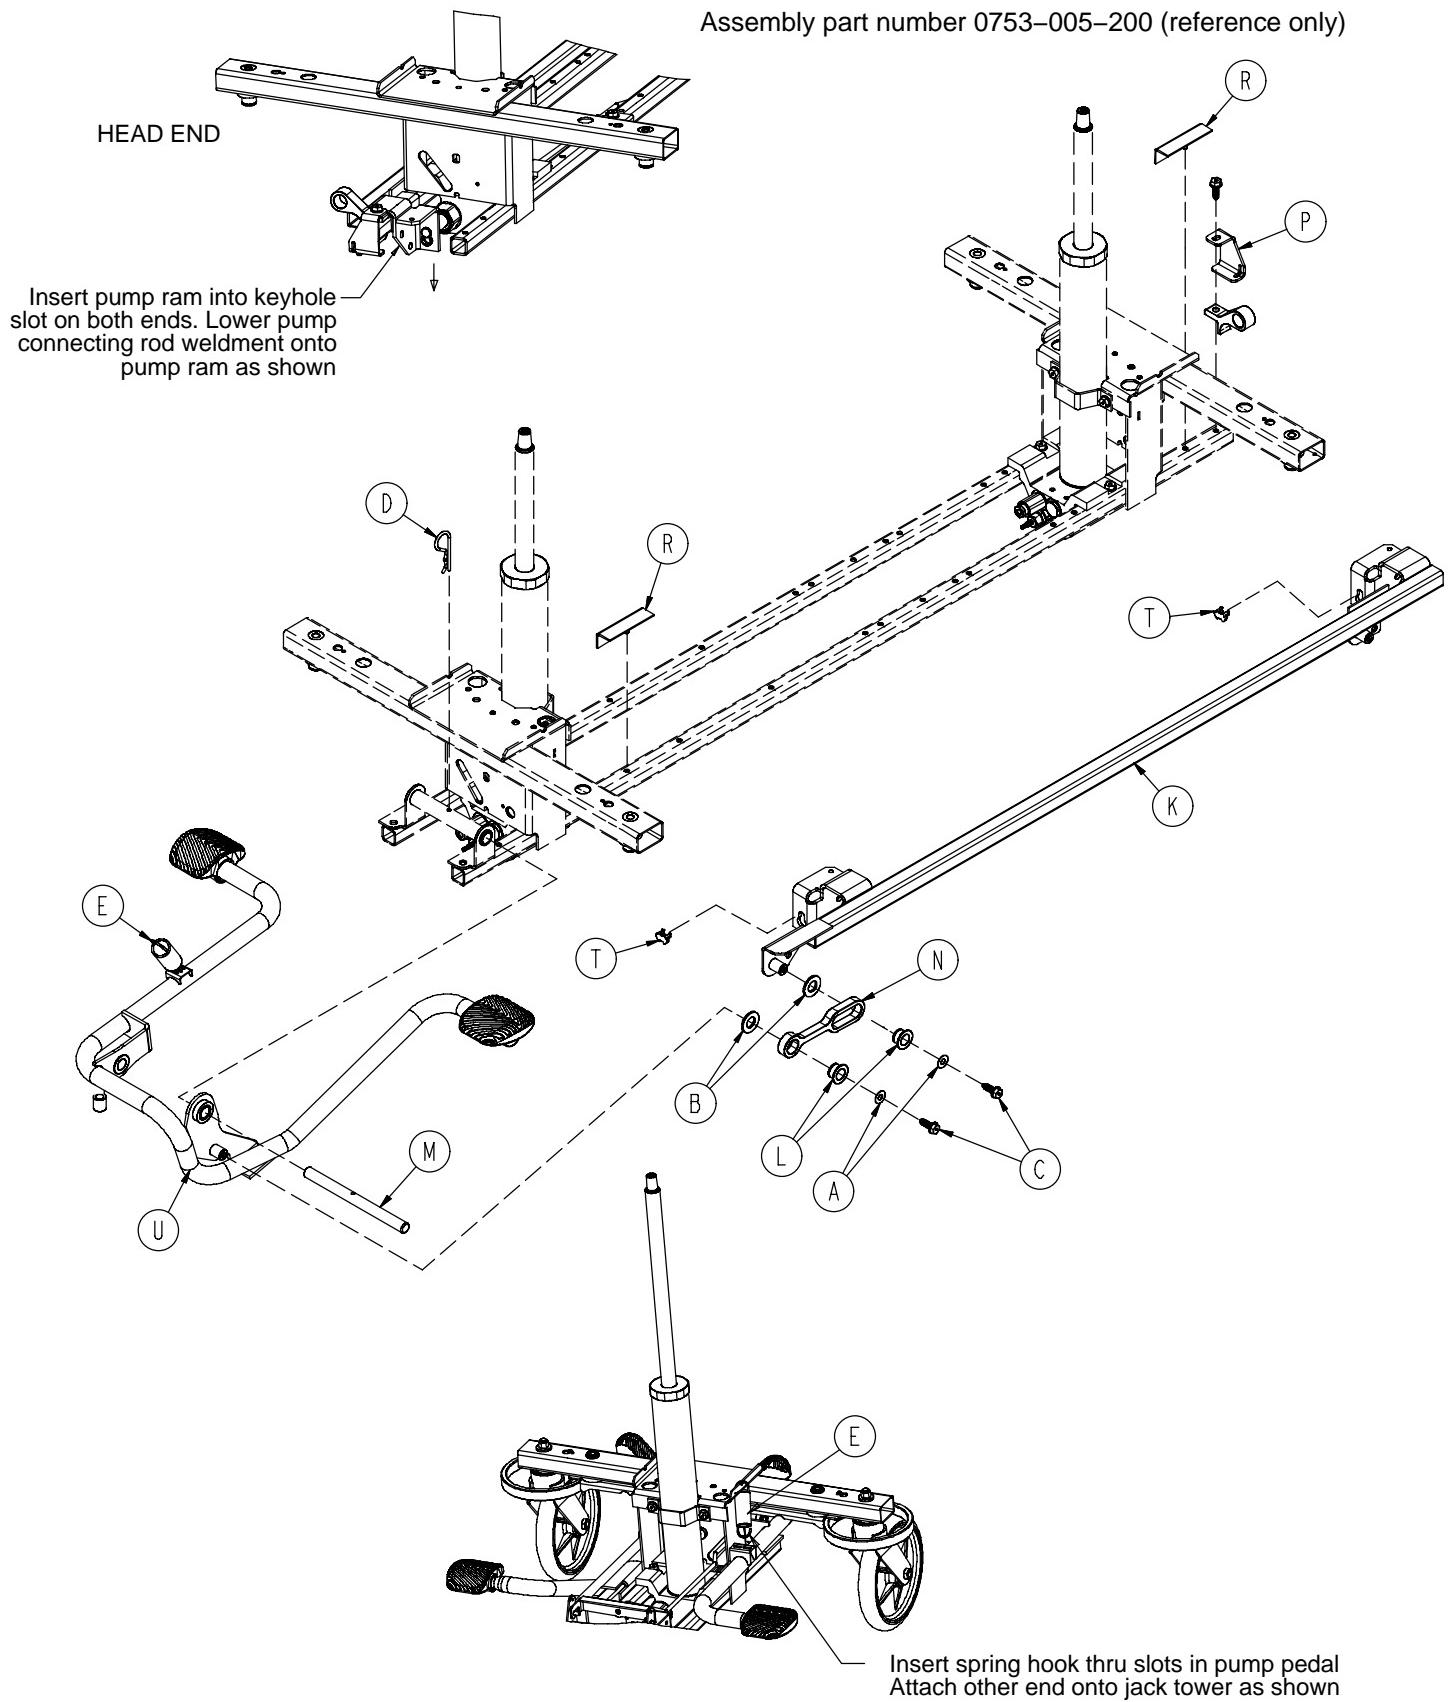

Base with Dual Side Hydraulics

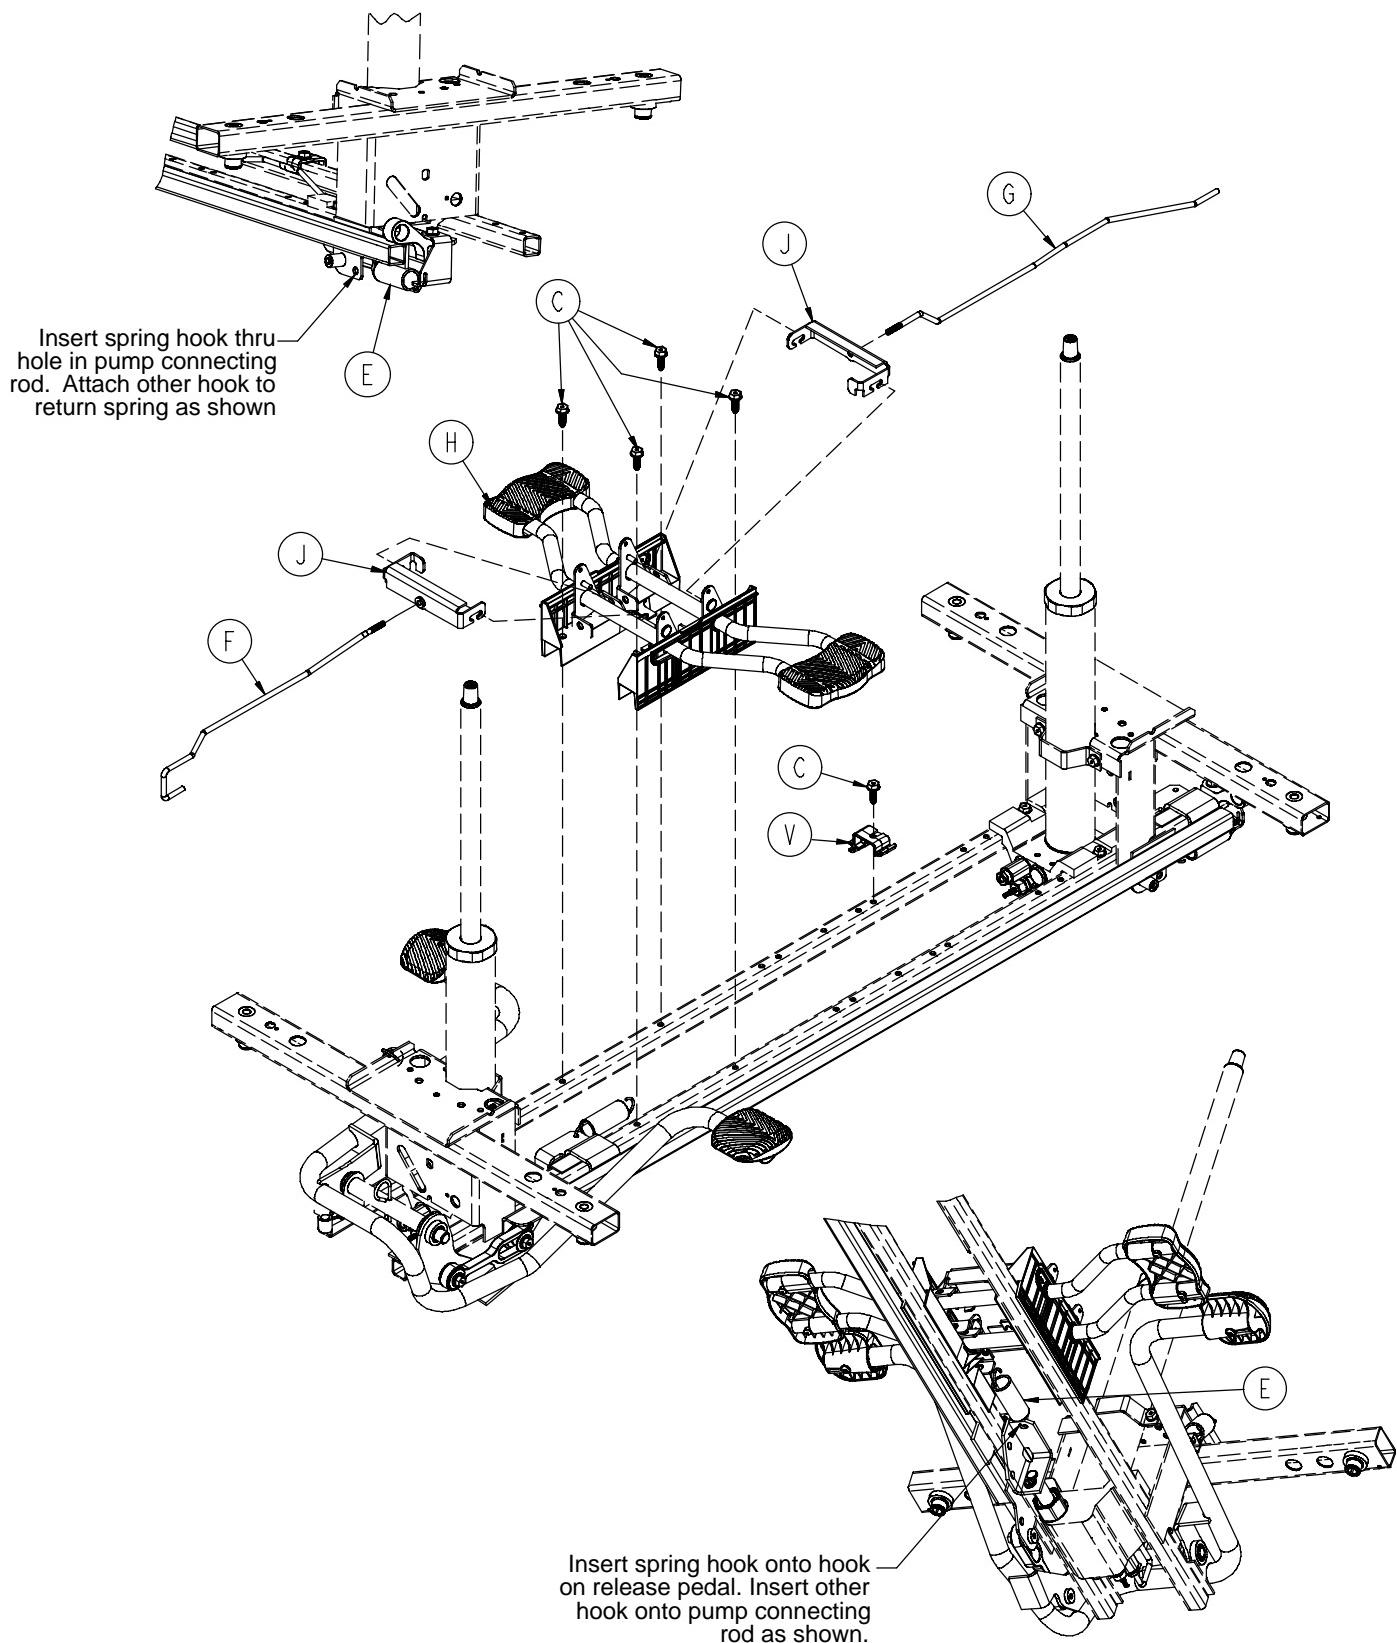


Base with Dual Side Hydraulics

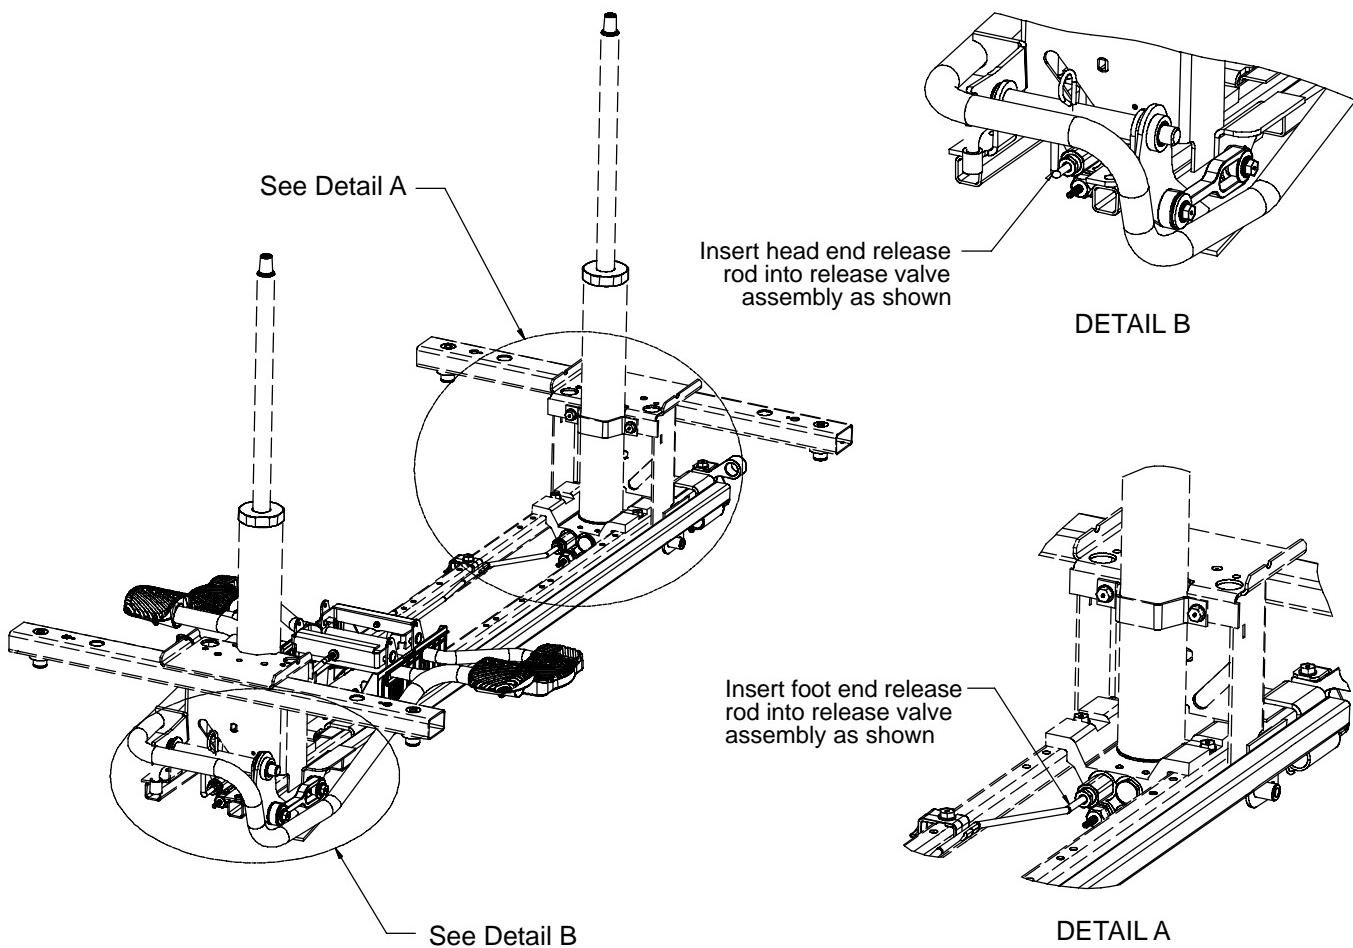


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|------|
| A | 0011-023-000 | Washer | 2 |
| B | 0014-071-000 | Washer | 2 |
| C | 0023-288-000 | Hex Washer Hd. Screw | 7 |
| D | 0027-031-000 | Hair Pin Cotter | 1 |
| E | 0038-497-000 | Extension Spring | 3 |
| F | 0753-004-014 | Head End Release Rod | 1 |
| G | 0753-004-015 | Foot End Release Rod | 1 |
| H | (page 29) | Release Pedal Assembly | 1 |
| J | 0753-004-132 | Release Pedal Swivel | 2 |
| K | 0753-005-037 | Pump Connecting Rod | 1 |
| L | 0753-005-044 | Pump Pedal Bushing | 2 |
| M | 0753-005-074 | Pivot Pin | 1 |
| N | 0753-005-075 | Pump Pedal Link | 1 |
| P | 0753-005-087 | Return Spring Hook | 1 |
| R | 0753-005-088 | Wear Strip | 2 |
| T | 0753-005-089 | Pump Ram Plug | 2 |
| U | (page 30) | Head End Pump Pedal Ass'y | 1 |
| V | 0753-010-215 | Release Rod Bracket | 1 |

0753-004-101 Release Pedal Assembly

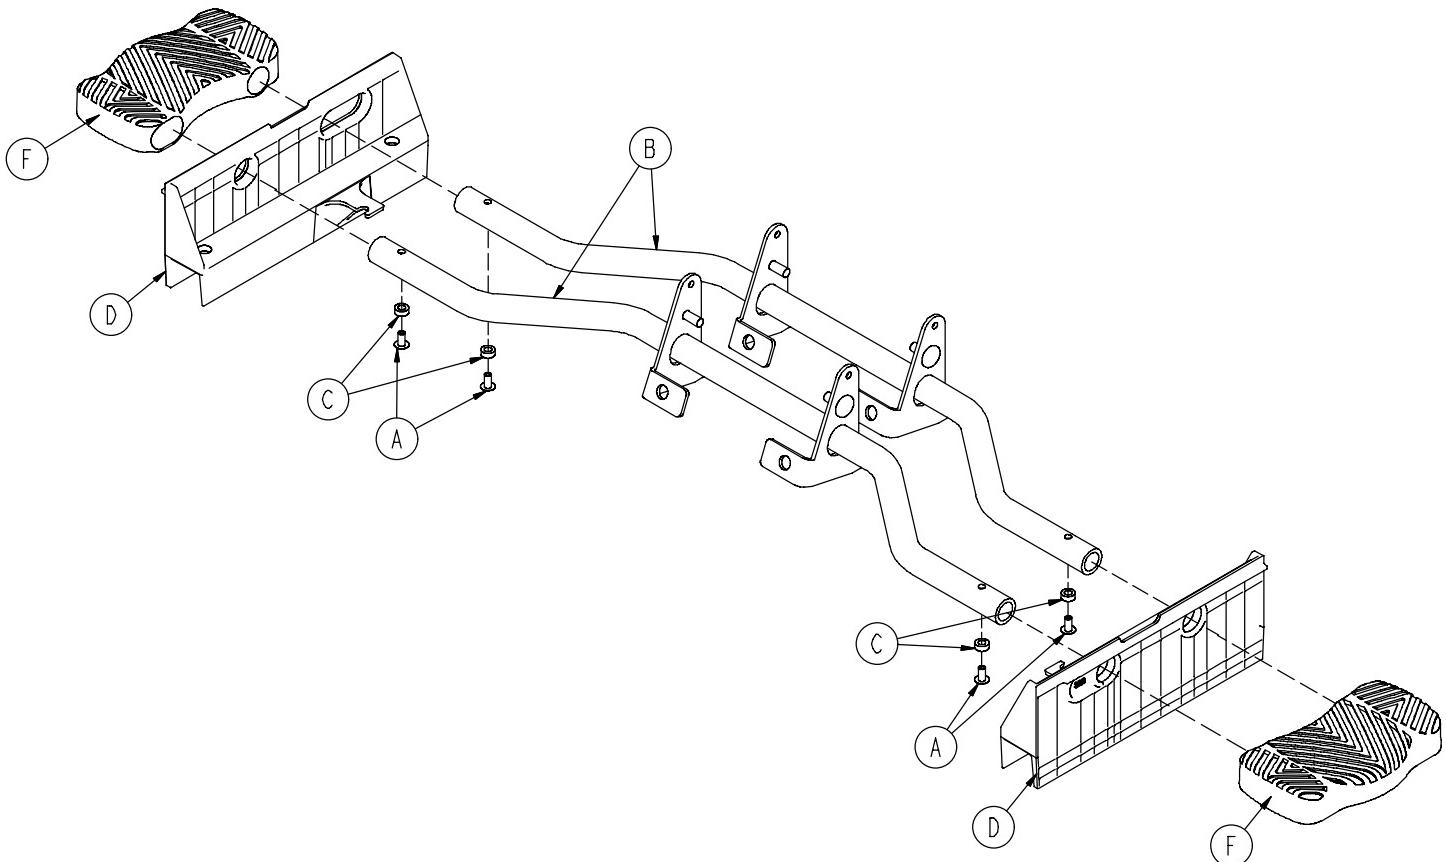

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 0025-079-000 | Rivet | 4 |
| B | 0753-004-004 | Release Pedal Weldment | 2 |
| C | 0753-004-029 | Release Pedal Standoff | 4 |
| D | 0753-004-320 | Release Pedal Support | 2 |
| F | 1061-201-127 | Short Uni Pedal | 2 |


0753-005-185 Head End Pump Pedal Assembly

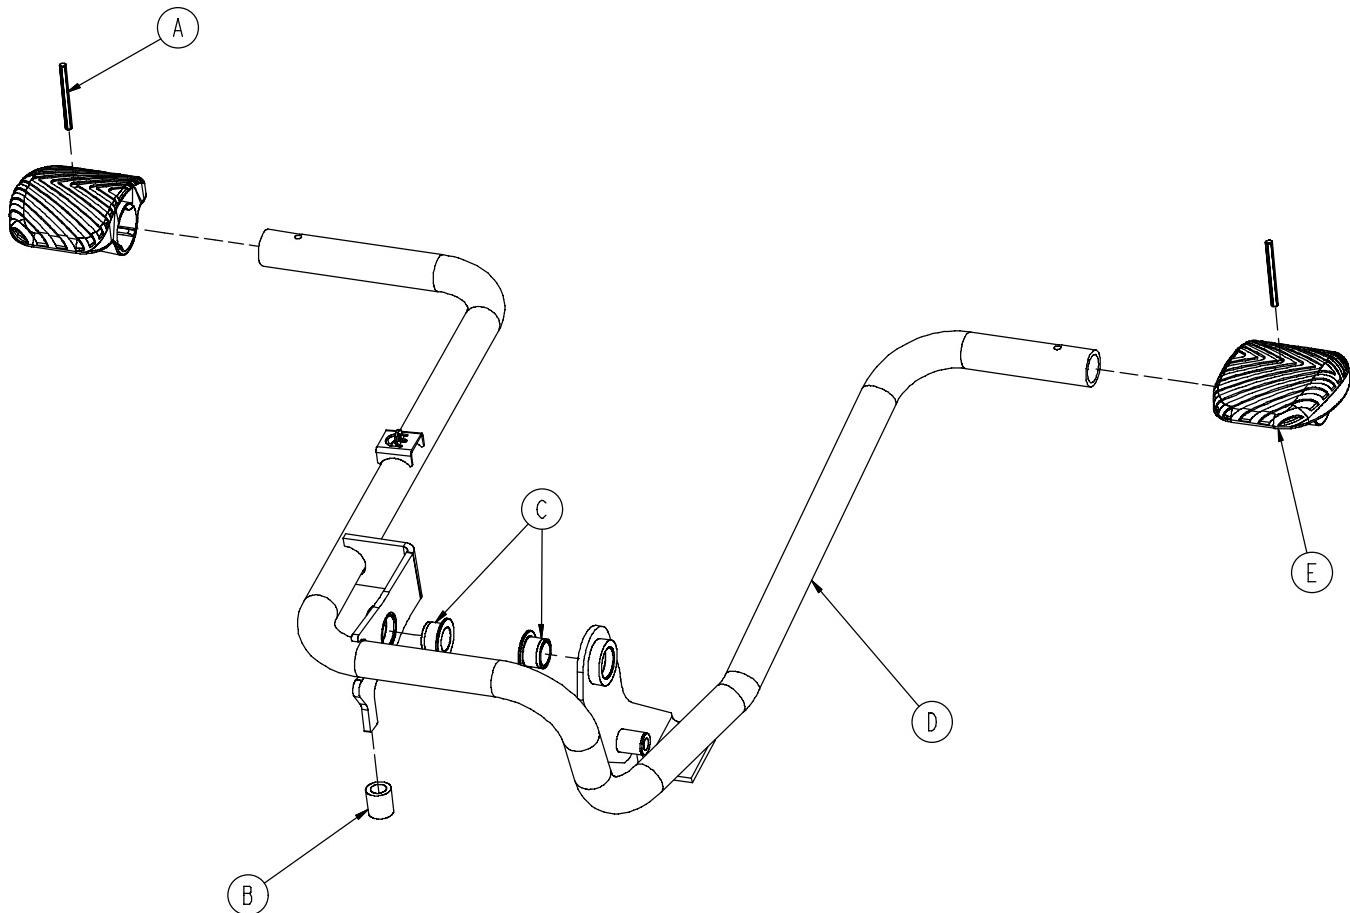


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------------|------|
| A | 0026-343-000 | Groove Pin | 2 |
| B | 0715-001-140 | Vinyl Tube | 1 |
| C | 0753-005-044 | Pump Pedal Bushing | 2 |
| D | 0753-005-180 | Head End Pump Pedal Weldment | 1 |
| E | 0753-201-126 | Pump Pedal | 2 |

Base with 3-Side Hydraulics

Assembly part number 0753-005-210 (reference only)

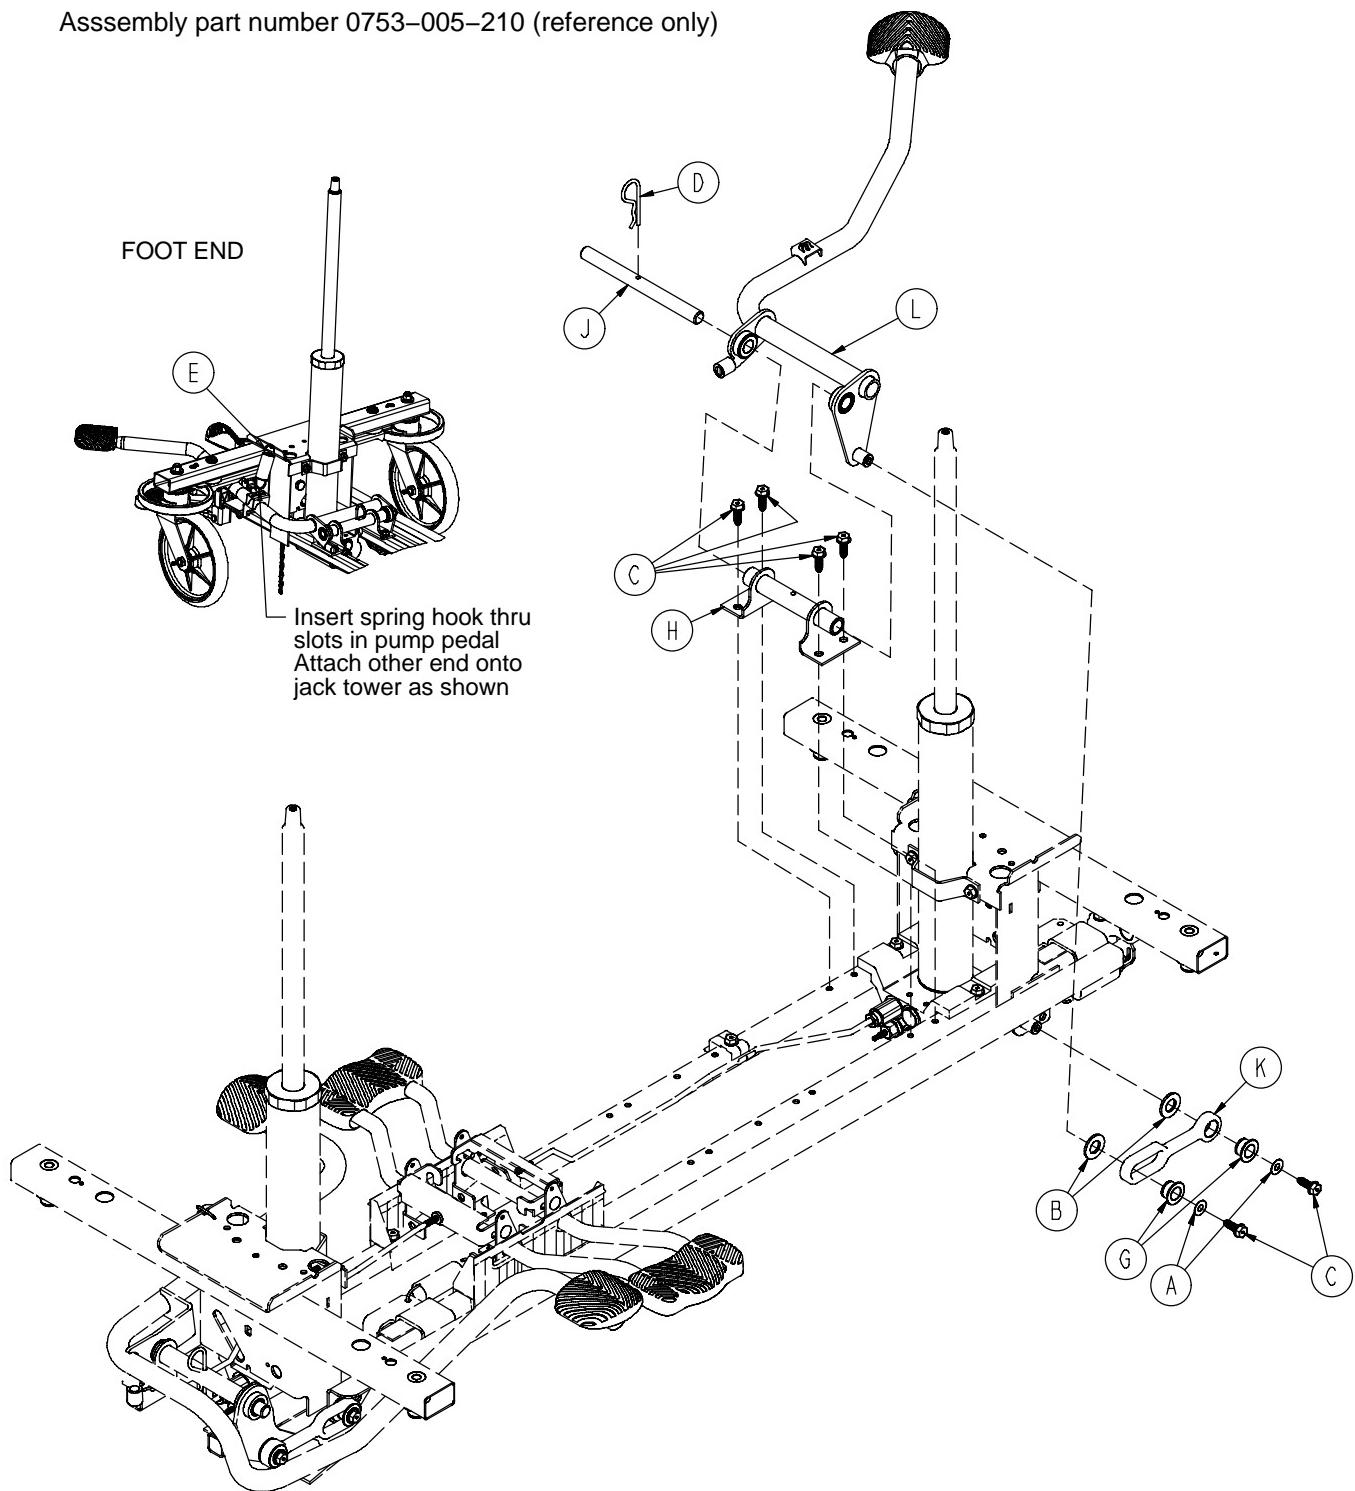


Base with 3-Side Hydraulics

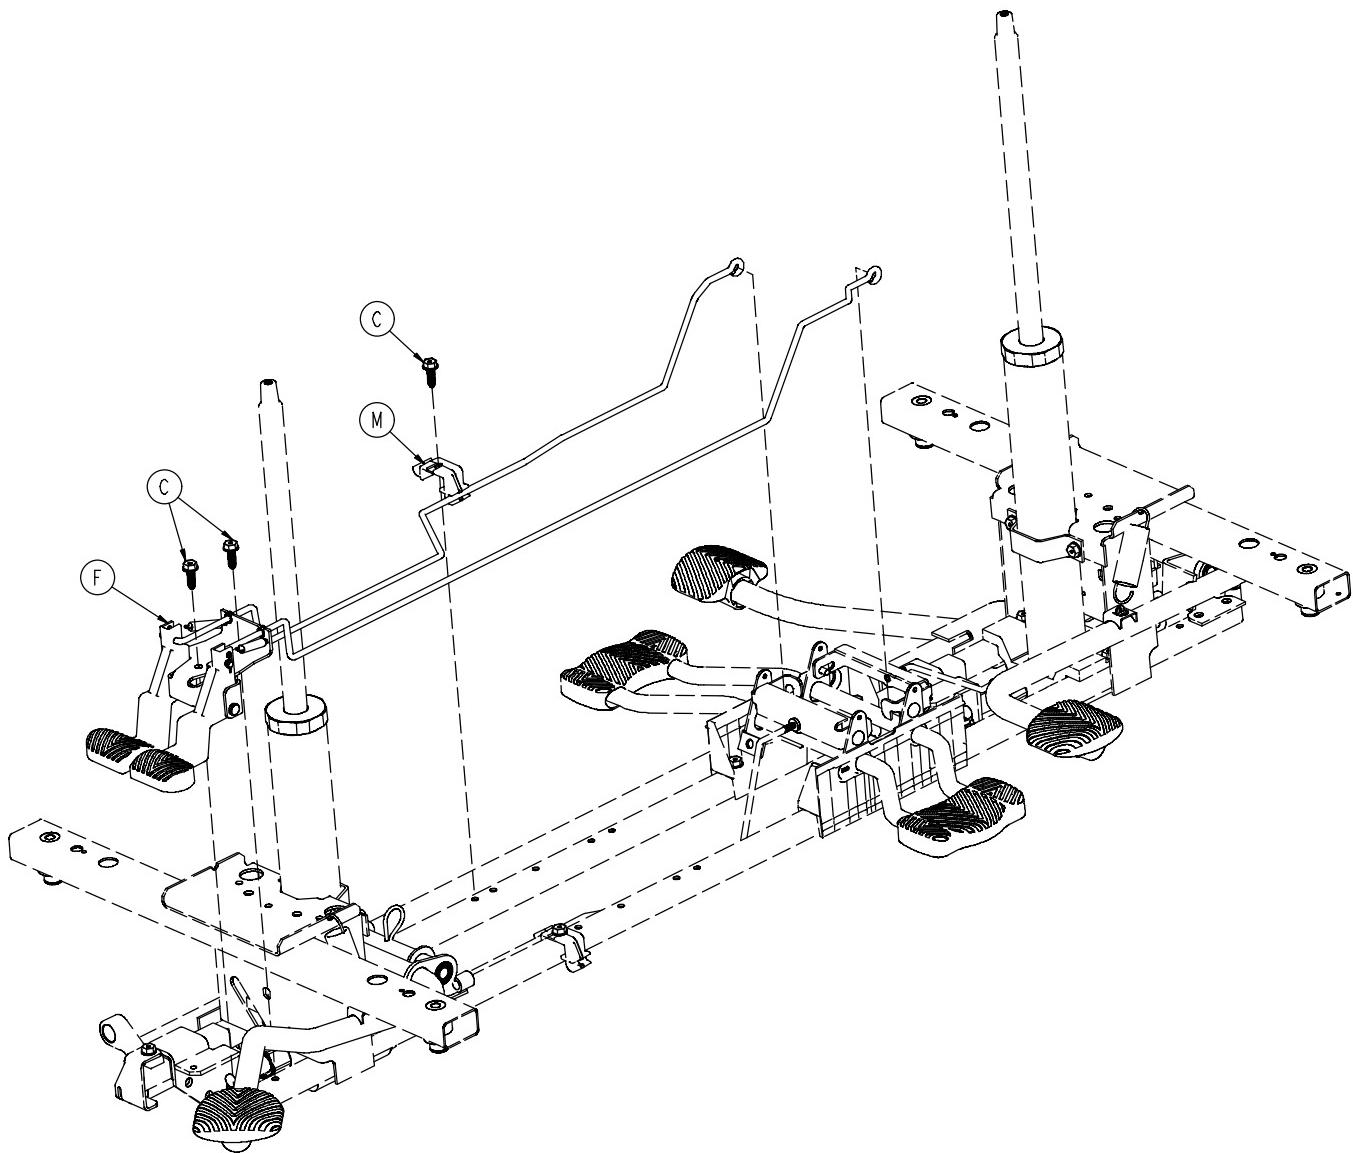

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------------|------|
| A | 0011-023-000 | Washer | 2 |
| B | 0014-071-000 | Washer | 2 |
| C | 0023-288-000 | Hex Washer Hd. Screw | 9 |
| D | 0027-031-000 | Cotter Pin | 1 |
| E | 0038-497-000 | Extension Spring | 1 |
| F | (page 33) | Foot End Release Pedal Ass'y | 1 |
| G | 0753-005-044 | Pump Pedal Bushing | 2 |
| H | 0753-005-063 | Foot End Mtg. Bracket | 1 |
| J | 0753-005-074 | Pivot Pin | 1 |
| K | 0753-005-075 | Pump Pedal Link | 1 |
| L | (page 34) | Foot End Pump Pedal Ass'y | 1 |
| M | 1040-010-215 | Release Rod Bracket | 1 |


Foot End Release Pedal Assembly

Assembly part number 0753-004-223 (reference only)

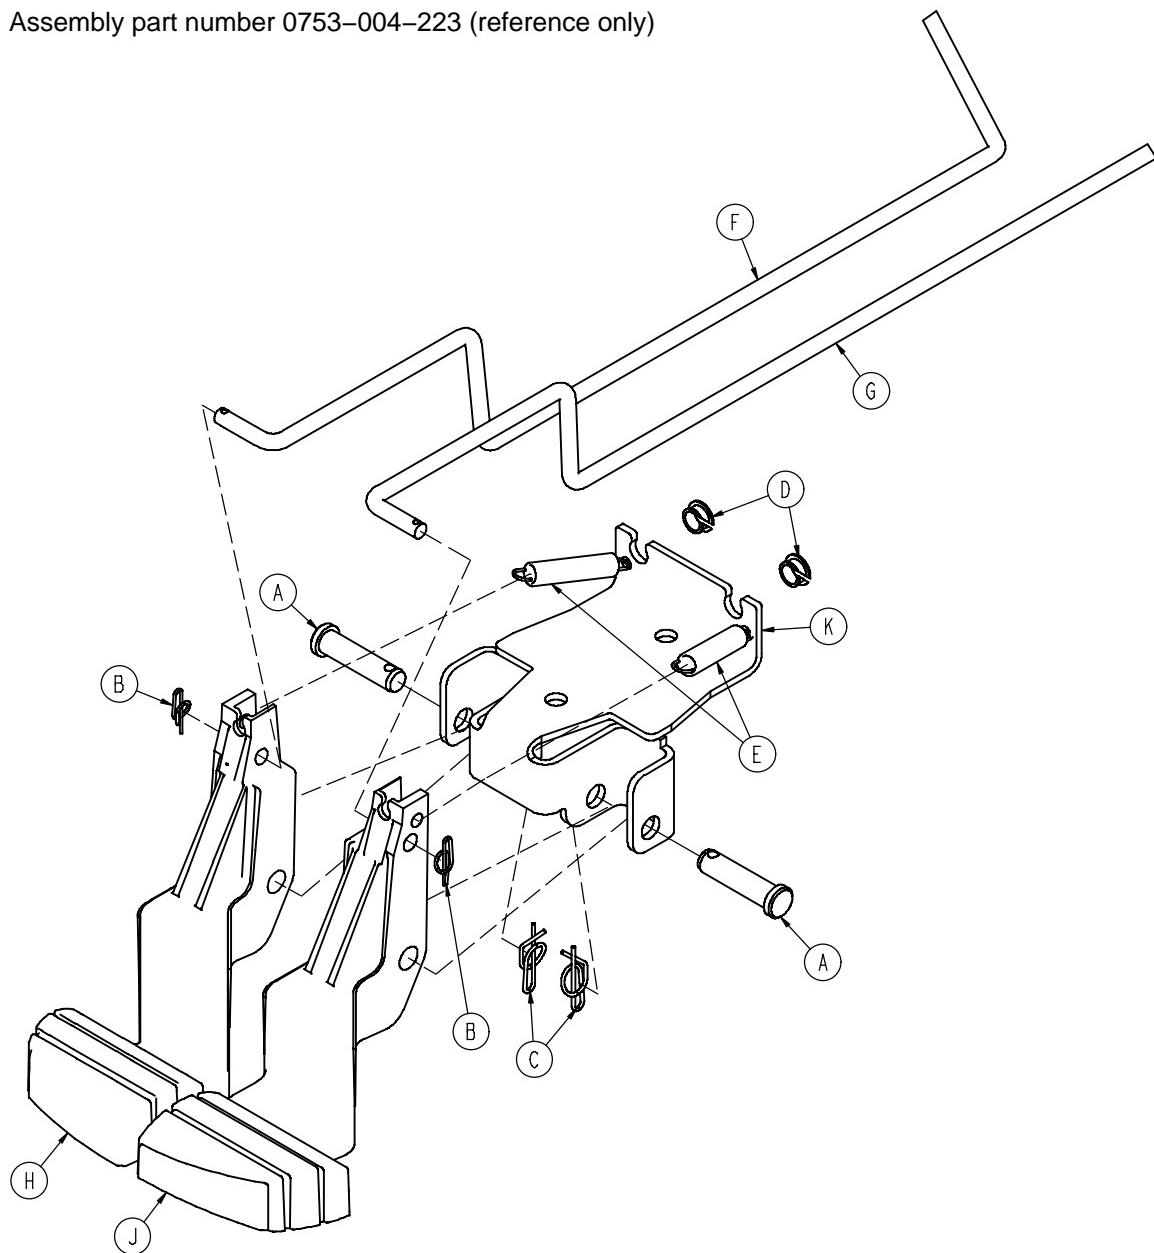


| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------------|------|
| A | 0026-132-000 | Clevis Pin | 2 |
| B | 0027-020-000 | Rue Ring Cotter | 2 |
| C | 0027-022-000 | Rue Ring Cotter | 2 |
| D | 0052-822-000 | Snap-In Nyliner | 2 |
| E | 0753-004-028 | Release Pedal Return Spring | 2 |
| F | 0753-004-038 | Foot Release Rod | 1 |
| G | 0753-004-039 | Head Release Rod | 1 |
| H | 0753-004-134 | Foot End Release Pedal, Left | 1 |
| J | 0753-004-135 | Foot End Release Pedal, Right | 1 |
| K | 0753-004-422 | Release Pedal Mtg. Bracket | 1 |

0753-005-073 Foot End Pedal/Bearing Assembly

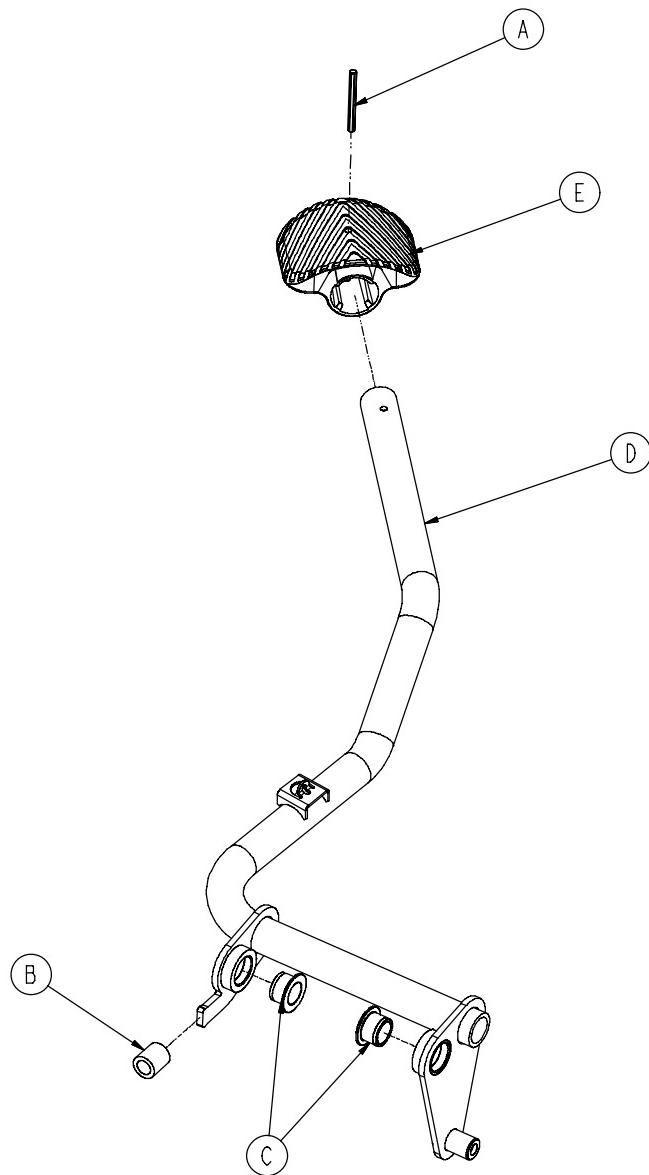


| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------|------|
| A | 0026-343-000 | Groove Pin | 1 |
| B | 0715-001-140 | Clear Vinyl Tubing | 1 |
| C | 0753-005-044 | Pump Pedal Bushing | 2 |
| D | 0753-005-171 | Foot End Pedal Weldment | 1 |
| E | 0715-201-126 | Plastic Pump Pedal | 1 |

0753-003-010 Drive Link Assembly

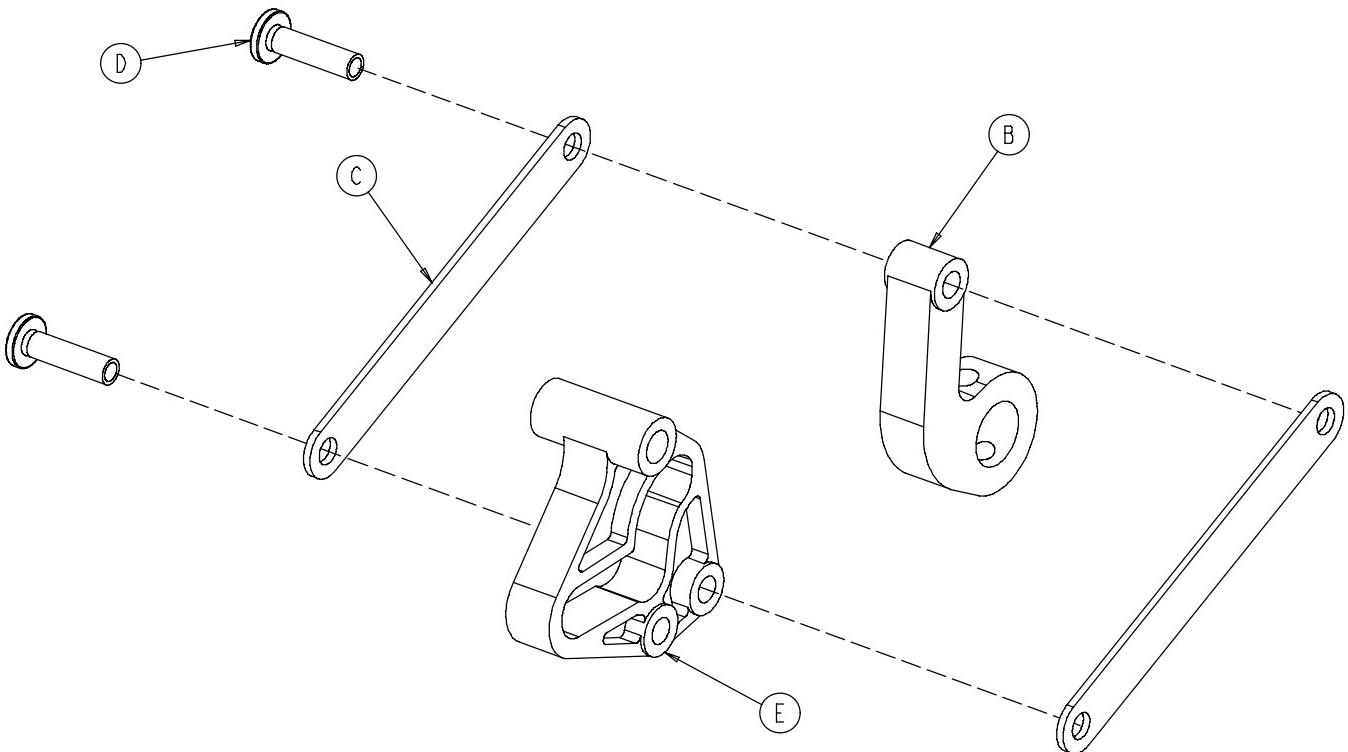


| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------------|------|
| B | 0753-003-011 | Brake Rod Drive Link | 1 |
| C | 0753-003-061 | Brake Cam Drive Link | 2 |
| D | 0753-003-098 | Flat Hd. Semi-Tubular Rivet | 2 |
| E | 0753-003-102 | Brake Cam | 1 |

0753-006-135 Drive Link Assembly

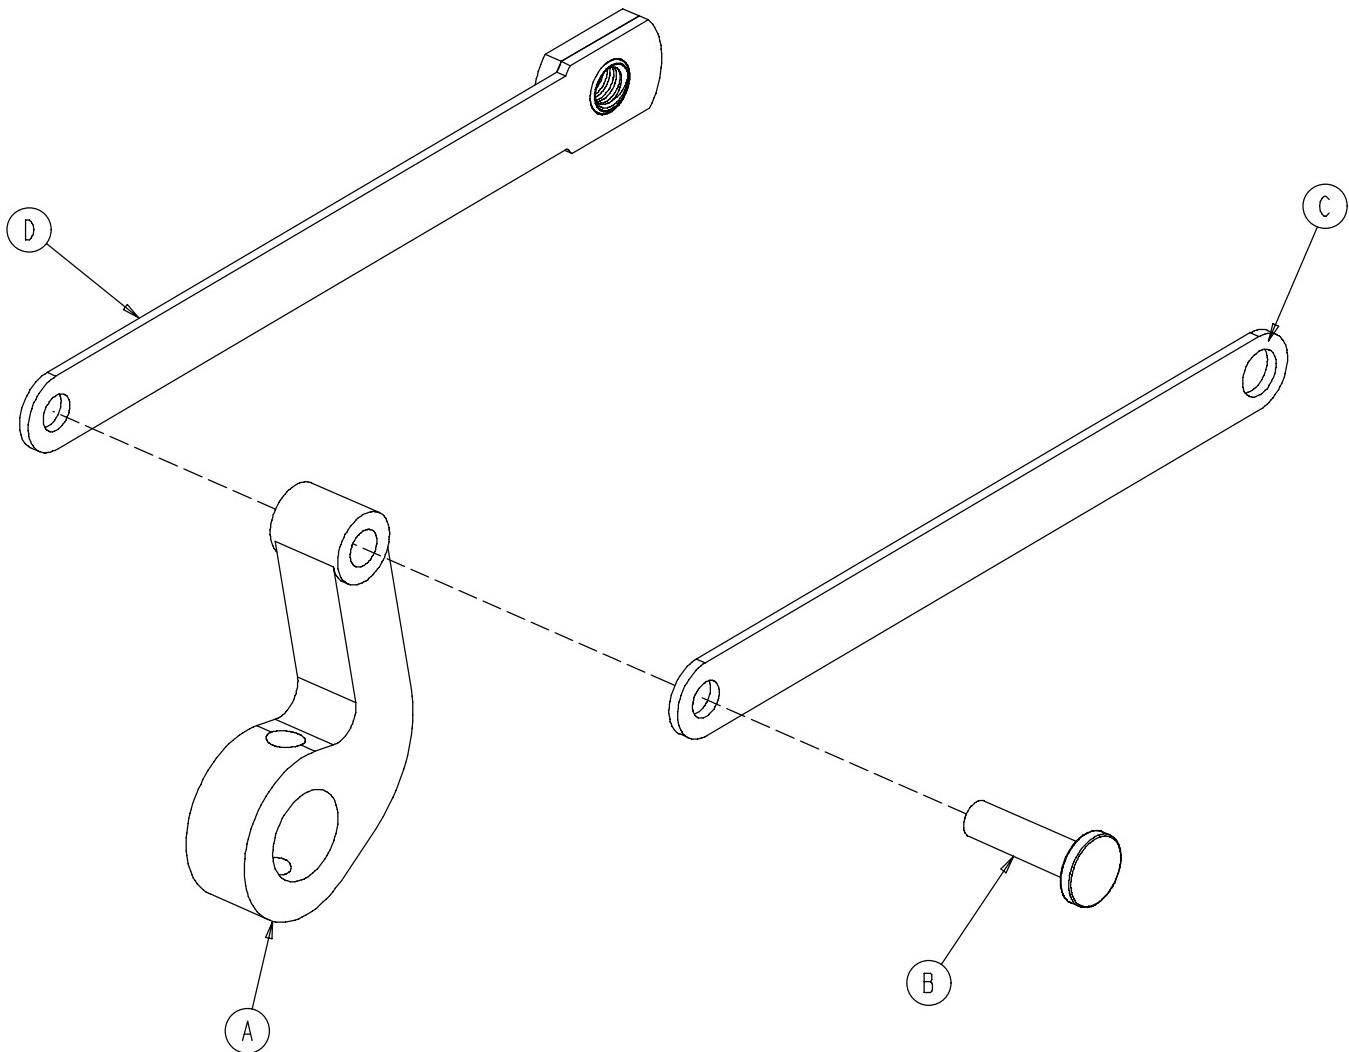

| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0753-003-011 | Brake Rod Drive Link | 1 |
| B | 0753-003-098 | Semi-Tubular Rivet | 1 |
| C | 0753-006-122 | 5th Wheel Cam Drive Link | 1 |
| D | 0753-006-147 | Fifth Wheel Drive Link | 1 |


0753-010-020 8" Caster Assembly

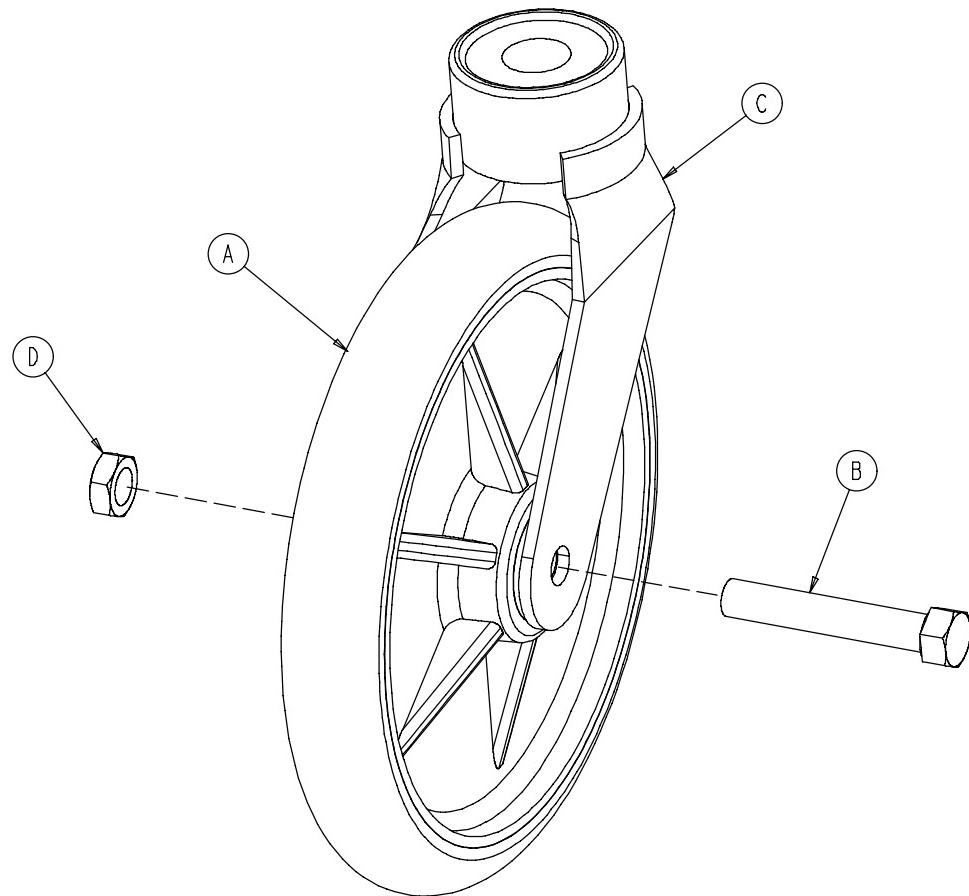

| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 0715-002-025 | Wheel | 1 |
| B | 0003-099-000 | Hex Hd. Cap Screw | 1 |
| C | 0753-010-021 | Caster Horn w/Bearing | 1 |
| D | 0016-060-000 | Centerlock Nut | 1 |


Notes

0753-006-110 Retractable Fifth Wheel Base Assembly

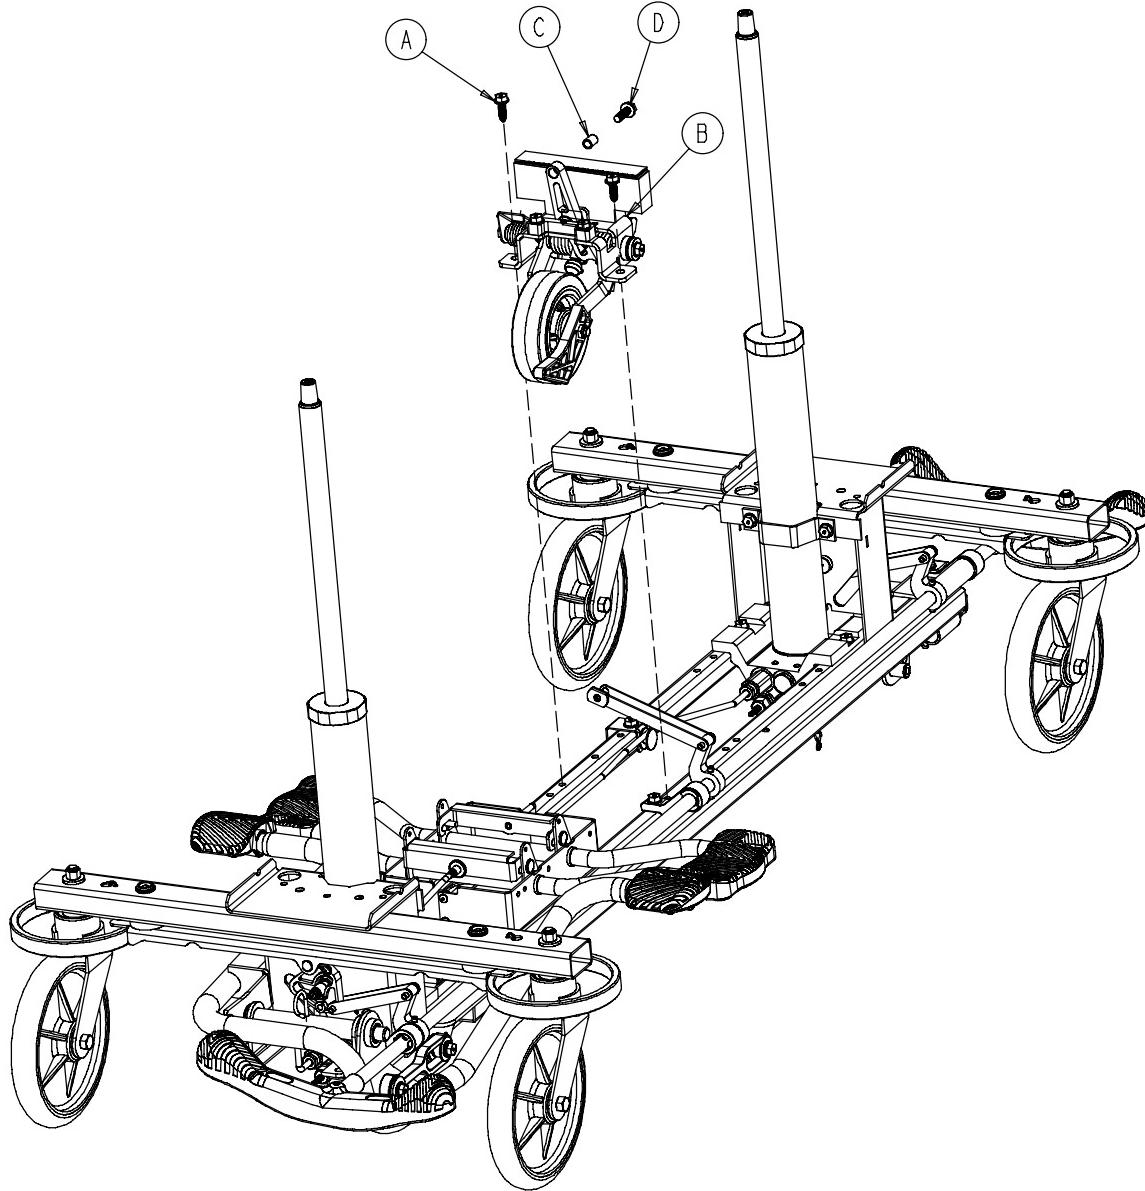

| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------|------|
| A | 0023-288-000 | Hex Washer Hd. Screw | 2 |
| B | (page 40) | Fifth Wheel Assembly | 1 |
| C | 0753-006-148 | Cam Bearing | 1 |
| D | 0023-305-000 | Hex Hd. Cap Screw | 1 |

0753-006-130 Fifth Wheel Assembly


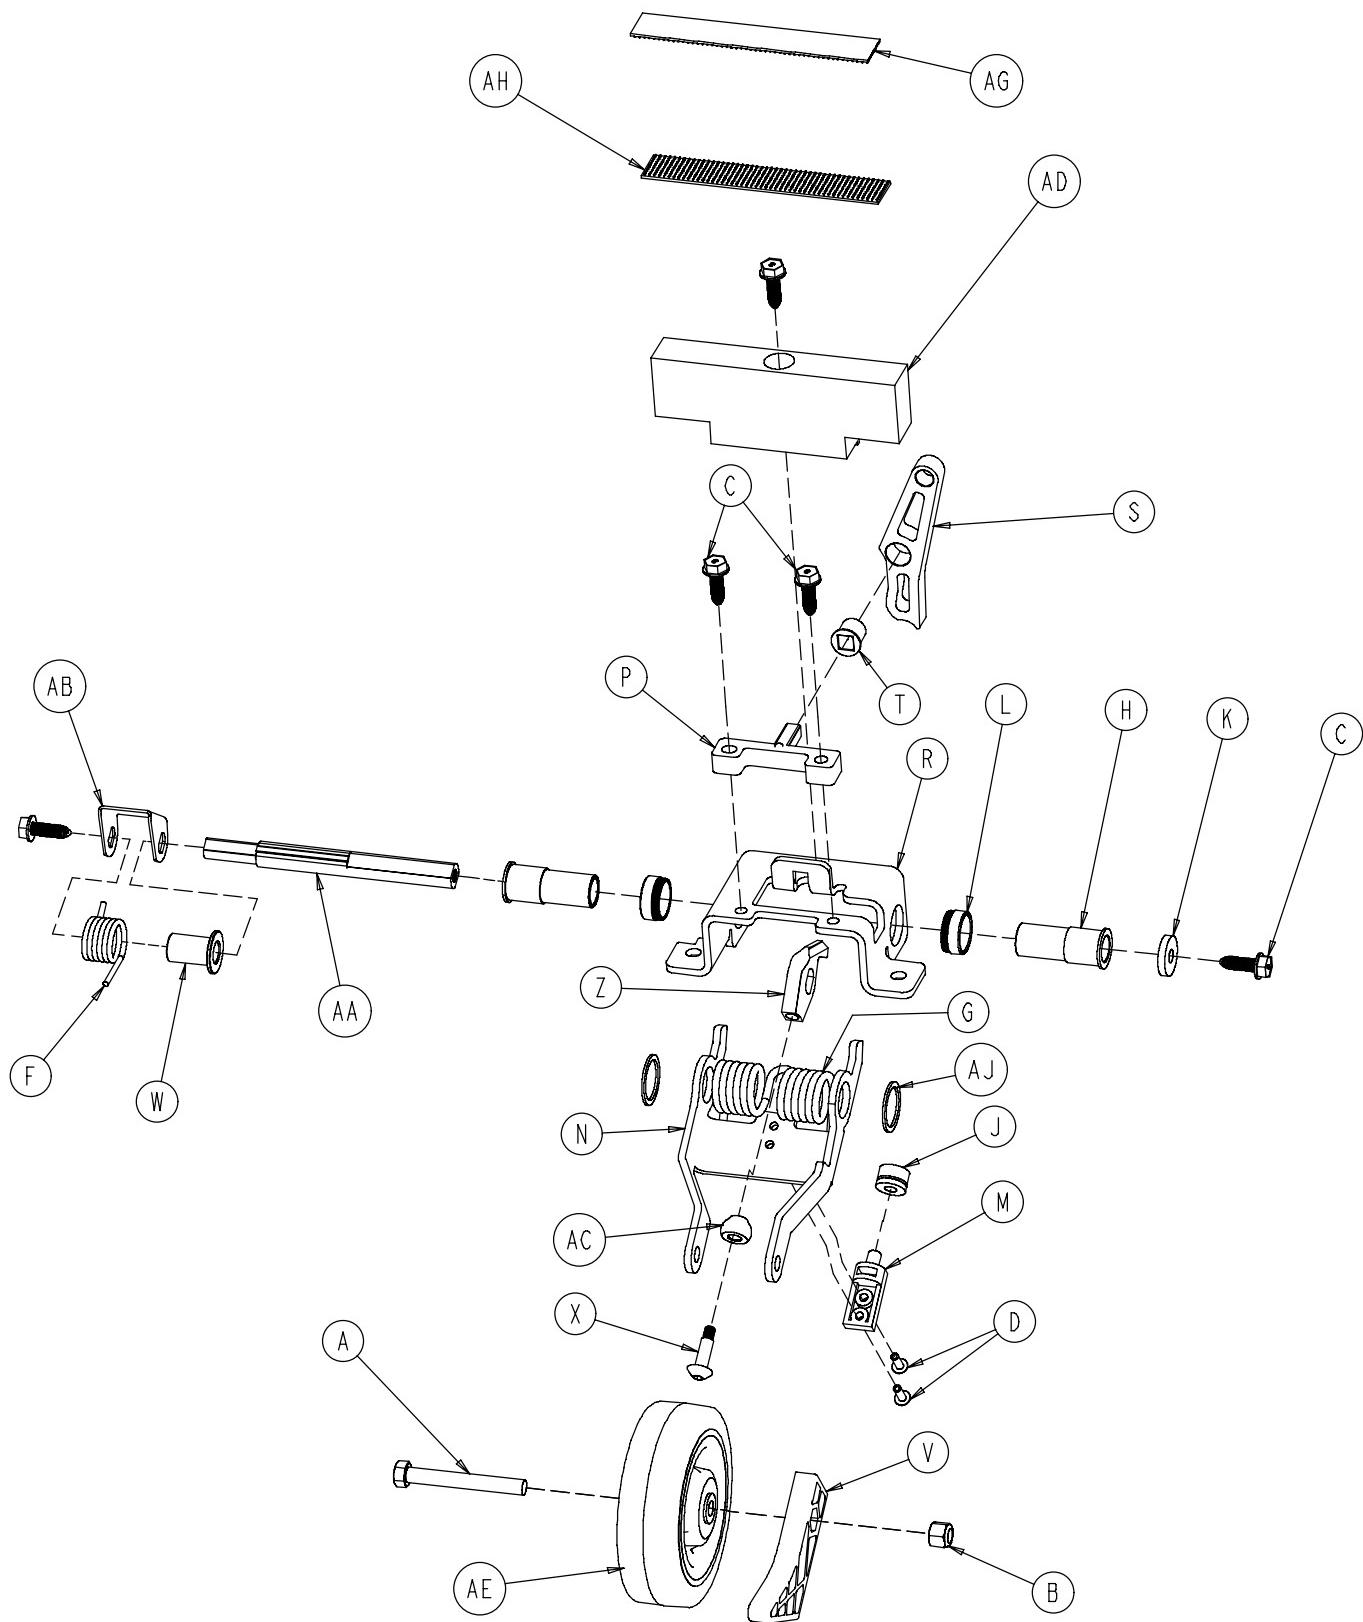


0753-006-130 Fifth Wheel Assembly

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------------|------|
| A | 0003-083-000 | Hex Hd. Cap Screw | 1 |
| B | 0016-035-000 | Nylock Hex Nut | 1 |
| C | 0023-288-000 | Hex Washer Hd. Screw | 5 |
| D | 0025-050-000 | Rivet | 2 |
| F | 0753-006-074 | Torsion Spring | 1 |
| G | 0753-006-075 | Torsion Spring | 1 |
| H | 0753-006-097 | Drive Shaft Bearing | 2 |
| J | 0753-006-106 | Dampener | 1 |
| K | 0753-006-108 | Thrust Washer | 1 |
| L | 0753-006-115 | Bearing | 2 |
| M | 0753-006-120 | Bumper Mounting Pin | 1 |
| N | 0753-006-126 | Wheel Bracket | 1 |
| P | 0753-006-133 | Cam Pivot Block | 1 |
| R | 0753-006-134 | Fifth Wheel Mounting Bracket | 1 |
| S | 0753-006-142 | Fifth Wheel Cam | 1 |
| T | 0753-006-143 | Cam Bearing | 1 |
| V | 0753-006-149 | 5th Wheel Ramp | 1 |
| W | 0753-006-152 | Spring Spacer | 1 |
| X | 0753-006-153 | Roller Stem | 1 |
| Z | 0753-006-198 | Drive Pin | 1 |
| AA | 0753-006-223 | Drive Shaft | 1 |
| AB | 0753-006-227 | Return Spring Hook | 1 |
| AC | 0753-006-277 | Roller | 1 |
| AD | 0753-010-045 | Hood Standoff | 1 |
| AE | 1210-001-147 | Wheel | 1 |
| AG | 0753-006-280 | Dual Lock | 1 |
| AH | 0753-006-281 | Dual Lock | 1 |
| AJ | 0011-360-000 | Washer | 2 |

Base Labels – Standard Brakes & Hydraulics

Assembly part number 0753-010-062 (reference only)

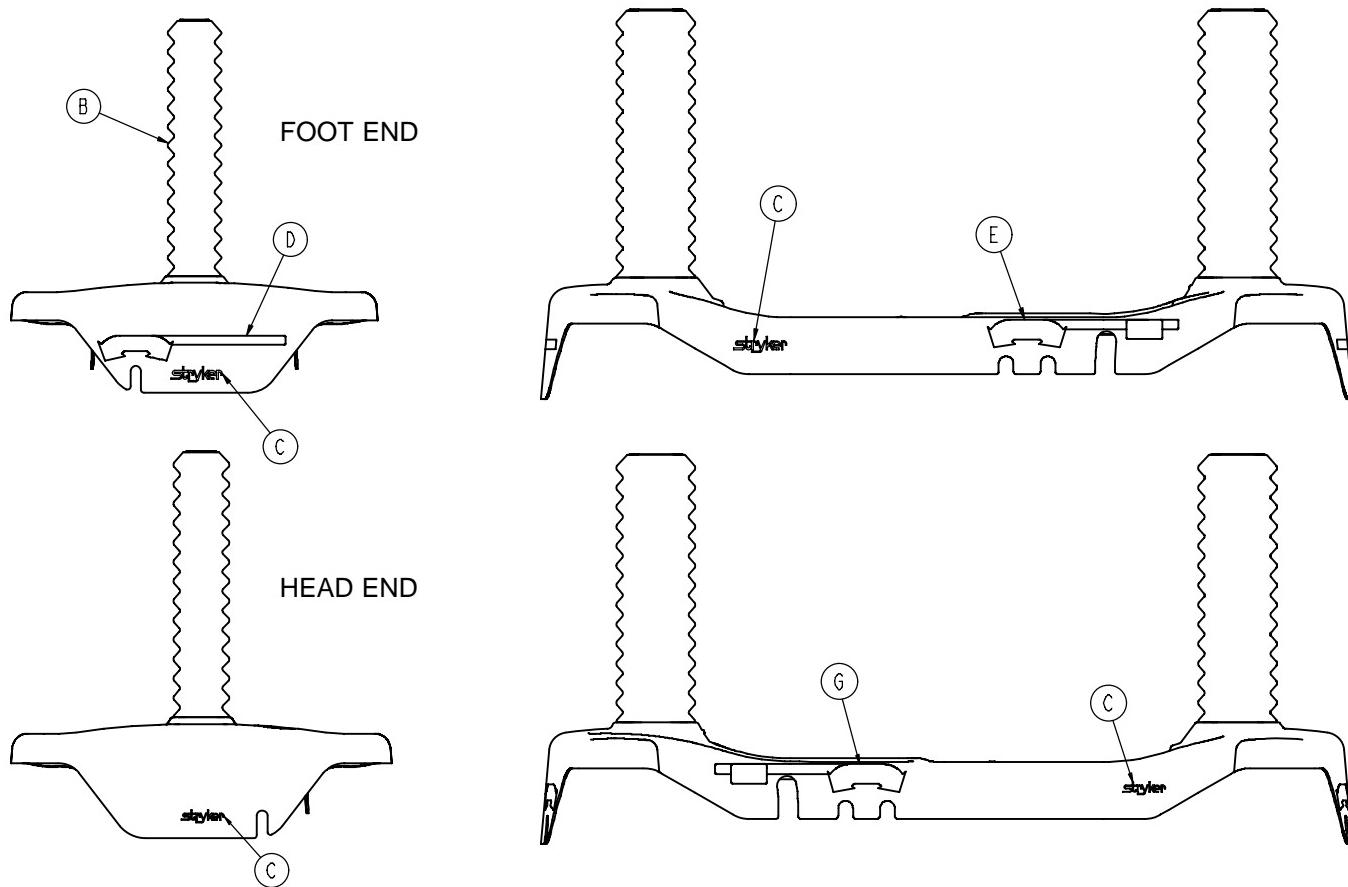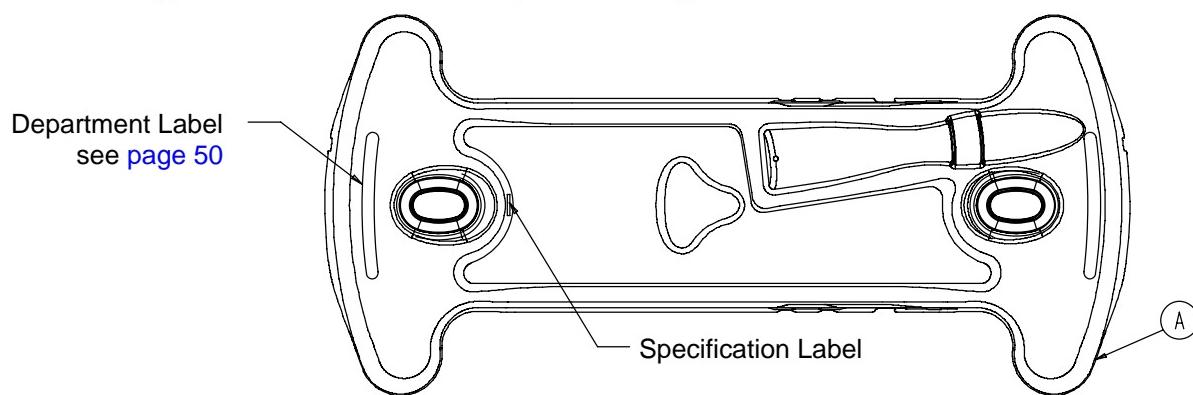


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------|------|
| A | 0753-010-040 | Base Hood | 1 |
| B | 1040-010-134 | Bellows | 2 |
| C | 0946-201-060 | Stryker Logo Label | 4 |

Base Labels – Standard Brakes & Hydraulics

| Color Set P/N | Item D Brake/ Steer, Foot End | Item E Lift/Lower, Left | Item G Lift/Lower, Right | Litter Bumper Strip |
|------------------------|----------------------------------|----------------------------|-----------------------------|------------------------|
| RED 0753-010-120 | 0753-010-051 | 0753-010-055 | 0753-010-054 | 1010-700-015 |
| PURPLE 0753-010-121 | 0753-010-151 | 0753-010-155 | 0753-010-154 | 1010-700-025 |
| GREEN 0753-010-122 | 0753-010-251 | 0753-010-255 | 0753-010-254 | 1010-700-035 |
| GRAY 0753-010-123 | 0753-010-351 | 0753-010-355 | 0753-010-354 | 1010-700-045 |
| TEAL 0753-010-124 | 0753-010-451 | 0753-010-455 | 0753-010-454 | 1010-700-055 |
| PINK 0753-010-125 | 0753-010-551 | 0753-010-555 | 0753-010-554 | 1010-700-065 |
| BLUE 0753-010-126 | 0753-010-651 | 0753-010-655 | 0753-010-654 | 1010-700-075 |

Base Labels – 2-Side Brakes/3-Side Hydraulics

Assembly part number 0753-010-060 (reference only)

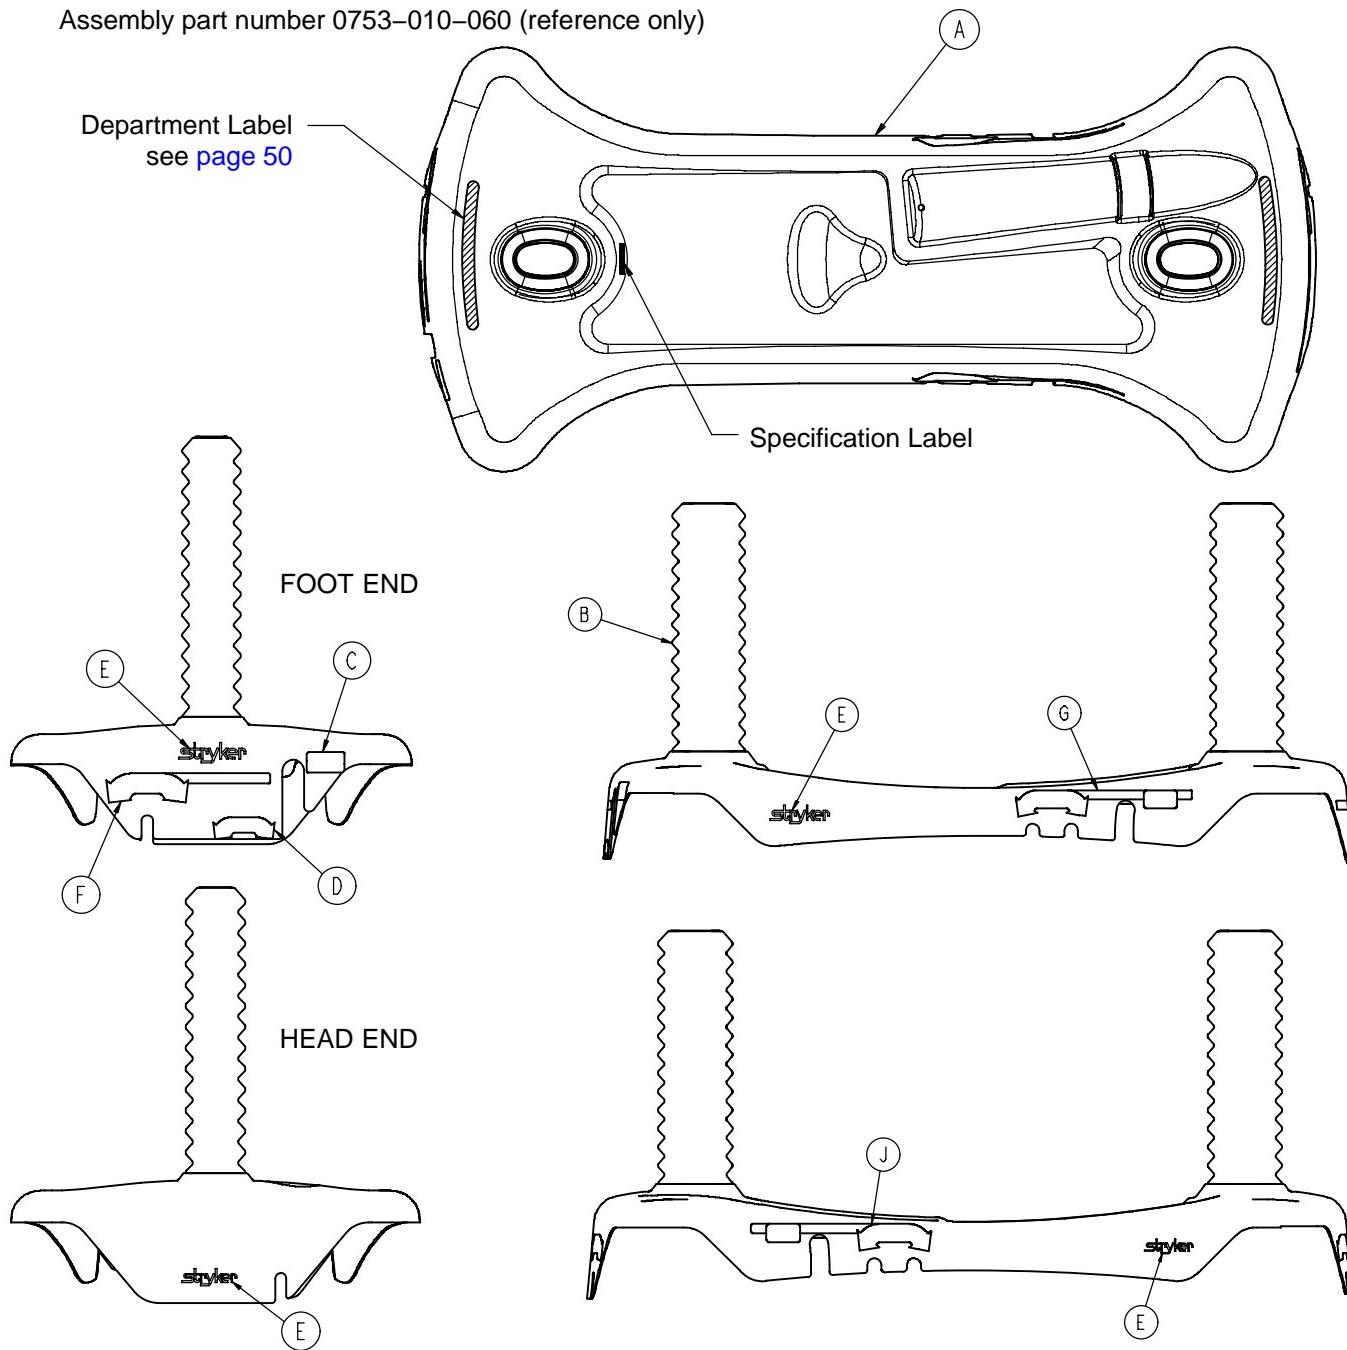


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|------|
| A | 0753-010-035 | Base Hood | 1 |
| B | 1040-010-134 | Bellows | 2 |
| C | 0753-010-052 | Pump Pedal Label, Foot | 1 |
| D | 0753-010-053 | Release Pedal Label, Foot | 1 |
| E | 0946-201-060 | Stryker Logo Label | 4 |

Base Labels – 2-Side Brakes/3-Side Hydraulics

| Color Set P/N | Item F Brake/ Steer, Foot End | Item G Lift/Lower, Left | Item J Lift/Lower, Right | Litter Bumper Strip |
|------------------------|----------------------------------|----------------------------|-----------------------------|------------------------|
| RED 0753-010-100 | 0753-010-016 | 0753-010-055 | 0753-010-054 | 1010-700-015 |
| PURPLE 0753-010-101 | 0753-010-160 | 0753-010-155 | 0753-010-154 | 1010-700-025 |
| GREEN 0753-010-102 | 0753-010-260 | 0753-010-255 | 0753-010-254 | 1010-700-035 |
| GRAY 0753-010-103 | 0753-010-360 | 0753-010-355 | 0753-010-354 | 1010-700-045 |
| TEAL 0753-010-104 | 0753-010-460 | 0753-010-455 | 0753-010-454 | 1010-700-055 |
| PINK 0753-010-105 | 0753-010-560 | 0753-010-555 | 0753-010-554 | 1010-700-065 |
| BLUE 0753-010-106 | 0753-010-660 | 0753-010-655 | 0753-010-654 | 1010-700-075 |

Base Labels – 4-Side Brakes/2-Side Hydraulics

Assembly part number 0753-010-063 (reference only)

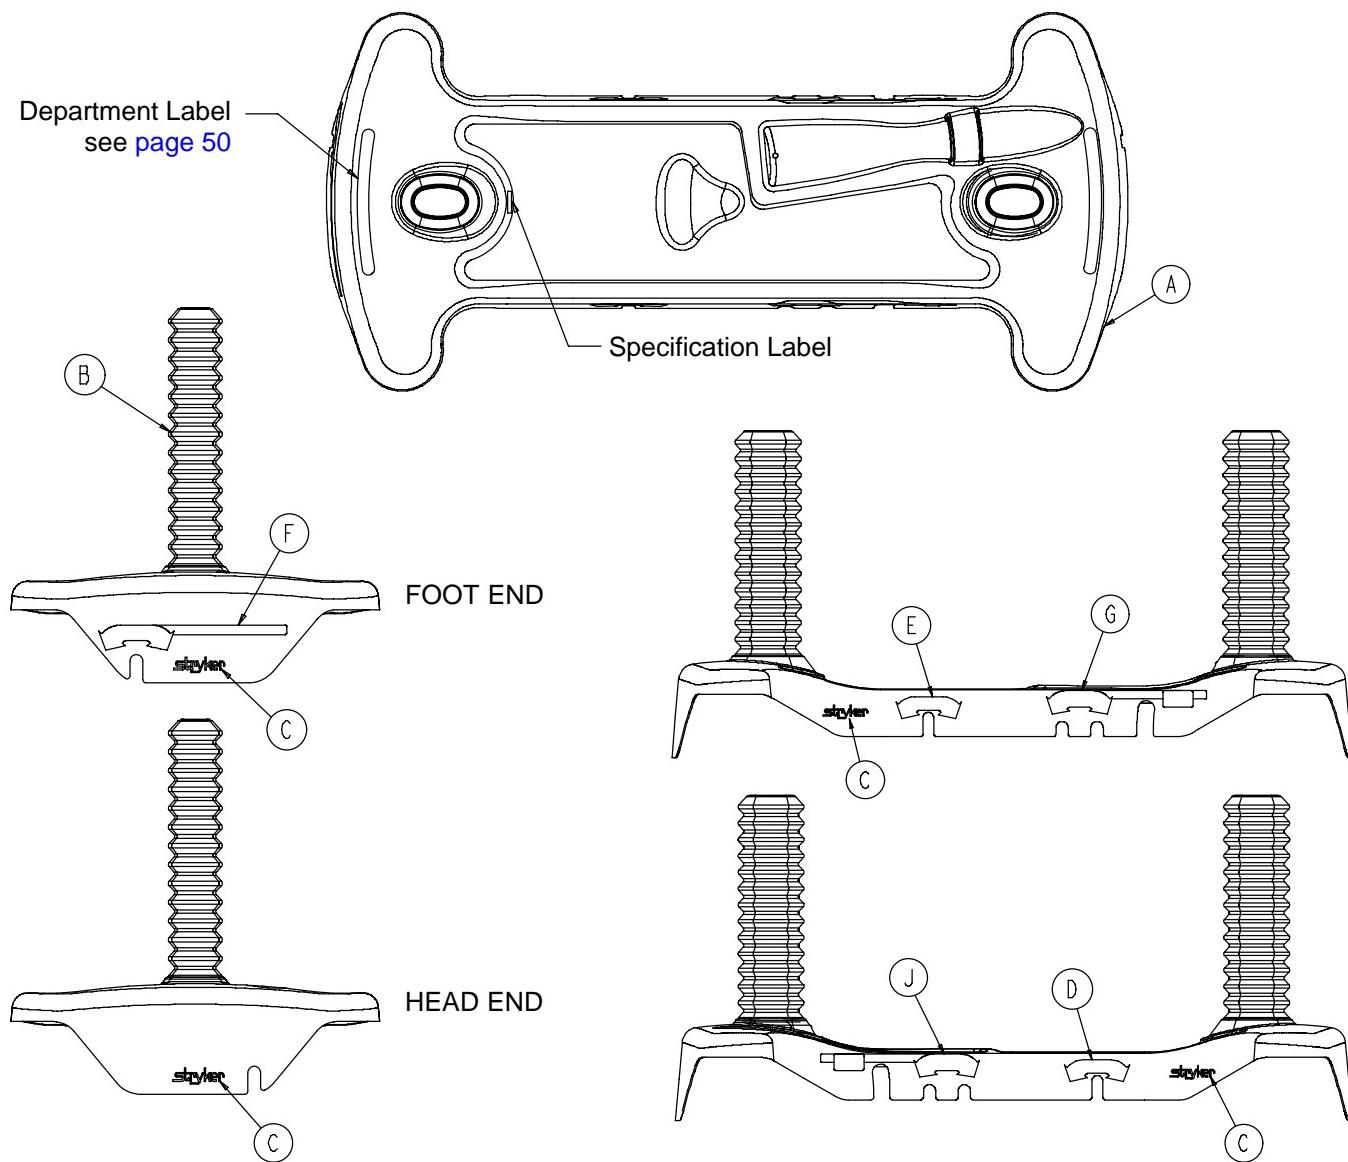


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0753-010-040 | Base Hood | 1 |
| B | 1040-010-134 | Bellows | 2 |
| C | 0946-201-060 | Stryker Logo Label | 4 |
| D | 0753-010-018 | Brake/Steer Label, Right | 1 |
| E | 0753-010-019 | Brake/Steer Label, Left | 1 |

Base Labels – 4-Side Brakes/2-Side Hydraulics

| Color Set P/N | Item F Brake/ Steer, Foot End | Item G Lift/Lower, Left | Item J Lift/Lower, Right | Litter Bumper Strip |
|------------------------|----------------------------------|----------------------------|-----------------------------|------------------------|
| RED 0753-010-120 | 0753-010-051 | 0753-010-055 | 0753-010-054 | 1010-700-015 |
| PURPLE 0753-010-121 | 0753-010-151 | 0753-010-155 | 0753-010-154 | 1010-700-025 |
| GREEN 0753-010-122 | 0753-010-251 | 0753-010-255 | 0753-010-254 | 1010-700-035 |
| GRAY 0753-010-123 | 0753-010-351 | 0753-010-355 | 0753-010-354 | 1010-700-045 |
| TEAL 0753-010-124 | 0753-010-451 | 0753-010-455 | 0753-010-454 | 1010-700-055 |
| PINK 0753-010-125 | 0753-010-551 | 0753-010-555 | 0753-010-554 | 1010-700-065 |
| BLUE 0753-010-126 | 0753-010-651 | 0753-010-655 | 0753-010-654 | 1010-700-075 |

Base Labels – 4-Side Brakes/3-Side Hydraulics

Assembly part number 0753-010-061 (reference only)

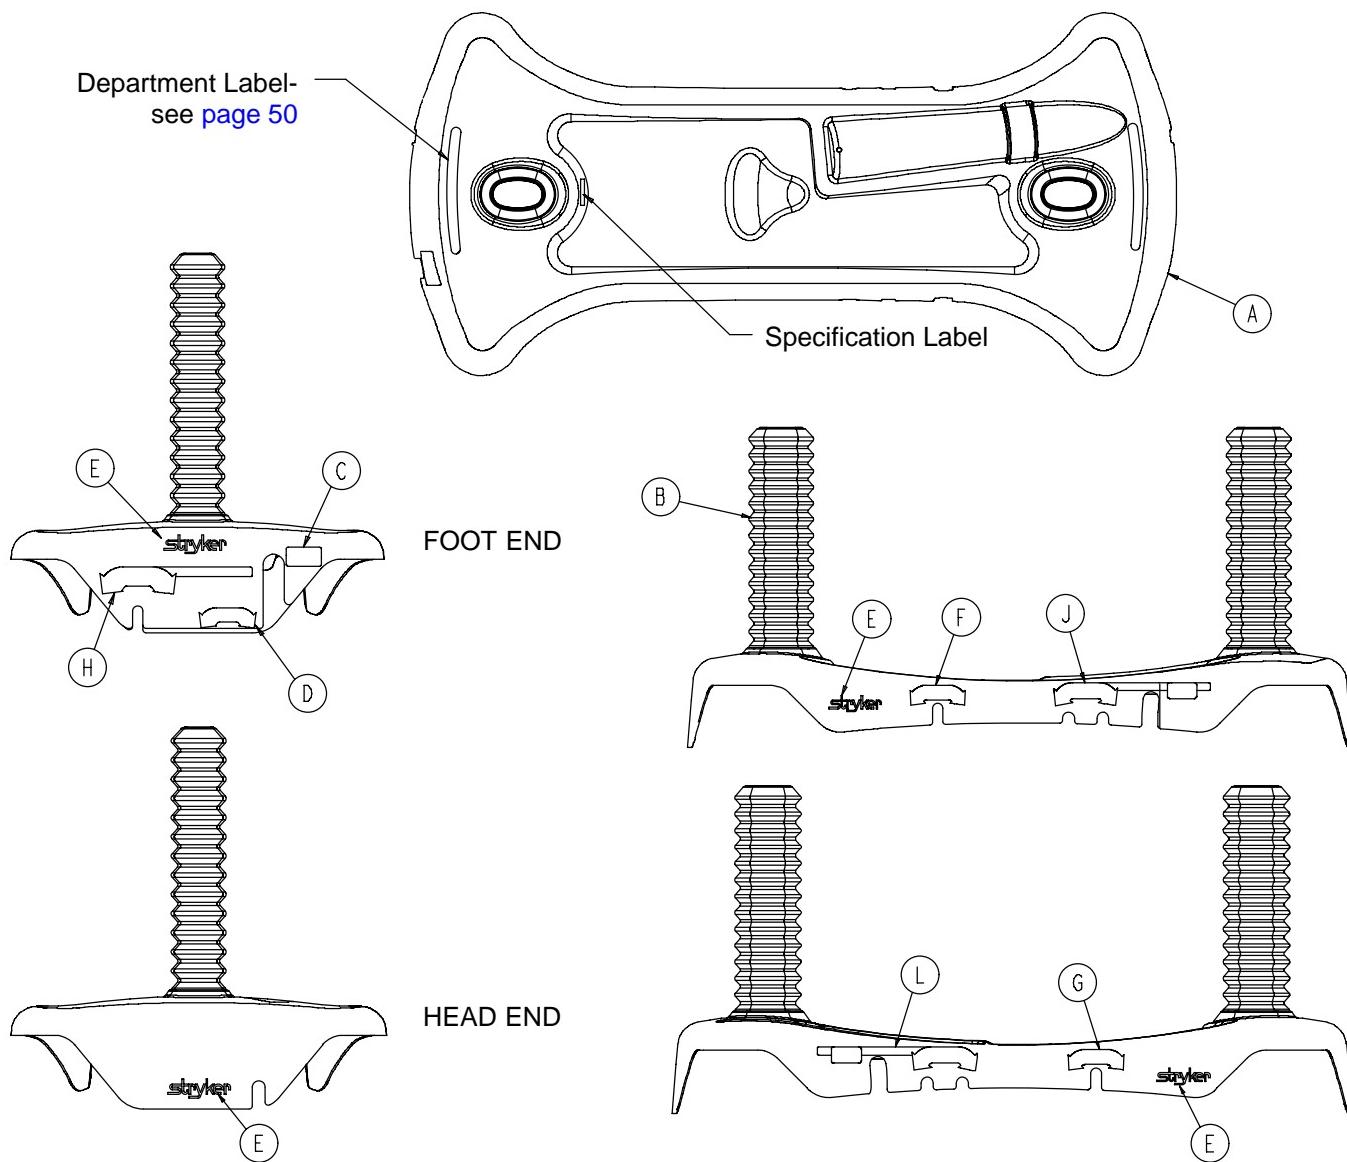

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------------|------|
| A | 0753-010-037 | Base Hood | 1 |
| B | 1040-010-134 | Bellows | 2 |
| C | 0753-010-052 | Foot End Pump Pedal Label | 1 |
| D | 0753-010-053 | Foot End Release Pedal Label | 1 |
| E | 0946-201-060 | Stryker Logo Label | 4 |
| F | 0753-010-019 | Brake/Steer Label, Left | 1 |
| G | 0753-010-018 | Brake/Steer Label, Left | 1 |

Base Labels – 4-Side Brakes/3-Side Hydraulics

| Color Set P/N | Item H Brake/ Steer, Foot End | Item J Lift/Lower, Left | Item L Lift/Lower, Right | Litter Bumper Strip |
|------------------------|----------------------------------|----------------------------|-----------------------------|------------------------|
| RED 0753-010-100 | 0753-010-016 | 0753-010-055 | 0753-010-054 | 1010-700-015 |
| PURPLE 0753-010-101 | 0753-010-160 | 0753-010-155 | 0753-010-154 | 1010-700-025 |
| GREEN 0753-010-102 | 0753-010-260 | 0753-010-255 | 0753-010-254 | 1010-700-035 |
| GRAY 0753-010-103 | 0753-010-360 | 0753-010-355 | 0753-010-354 | 1010-700-045 |
| TEAL 0753-010-104 | 0753-010-460 | 0753-010-455 | 0753-010-454 | 1010-700-055 |
| PINK 0753-010-105 | 0753-010-560 | 0753-010-555 | 0753-010-554 | 1010-700-065 |
| BLUE 0753-010-106 | 0753-010-660 | 0753-010-655 | 0753-010-654 | 1010-700-075 |

Base Labels

BASE HOOD DEPARTMENT LABELS


| Department | Label Part Number |
|--------------------|-------------------|
| Emergency | 1010-900-215 |
| PACU | 1010-900-220 |
| Transport | 1010-900-225 |
| Surgery | 1010-900-230 |
| Extended Stay | 1010-900-235 |
| Maternity | 1010-900-240 |
| Endoscopy | 1010-900-245 |
| Radiology | 1010-900-250 |
| Nuclear Medicine | 1010-900-255 |
| Ambulatory Surgery | 1010-900-260 |
| G.I. Lab | 1010-900-265 |
| Cath. Lab | 1010-900-270 |
| Same Day Surgery | 1010-900-275 |
| Cardio. | 1010-900-280 |
| Ultrasound | 1010-900-285 |

NOTE

All base hood department labels are quantity of two.


Constant Descent Jacks

Assembly part number 0753-102-025
(reference only)

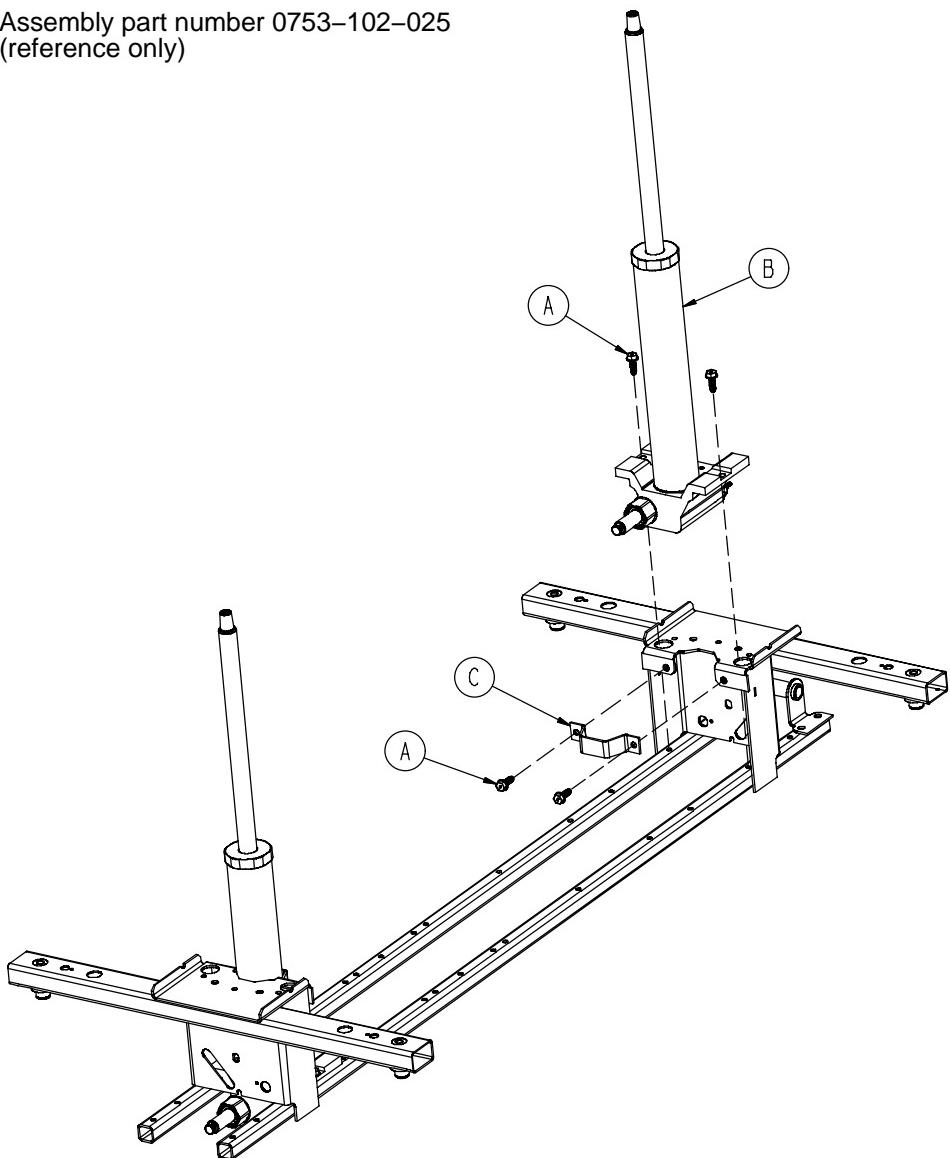

| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------------|------|
| A | 0023-288-000 | Hex Washer Hd. Screw | 8 |
| B | 0753-002-101 | Constant Descent Jack Ass'y | 2 |
| C | 0753-010-007 | Reservoir Clamp | 2 |


1069-020-010 Trend Limiter

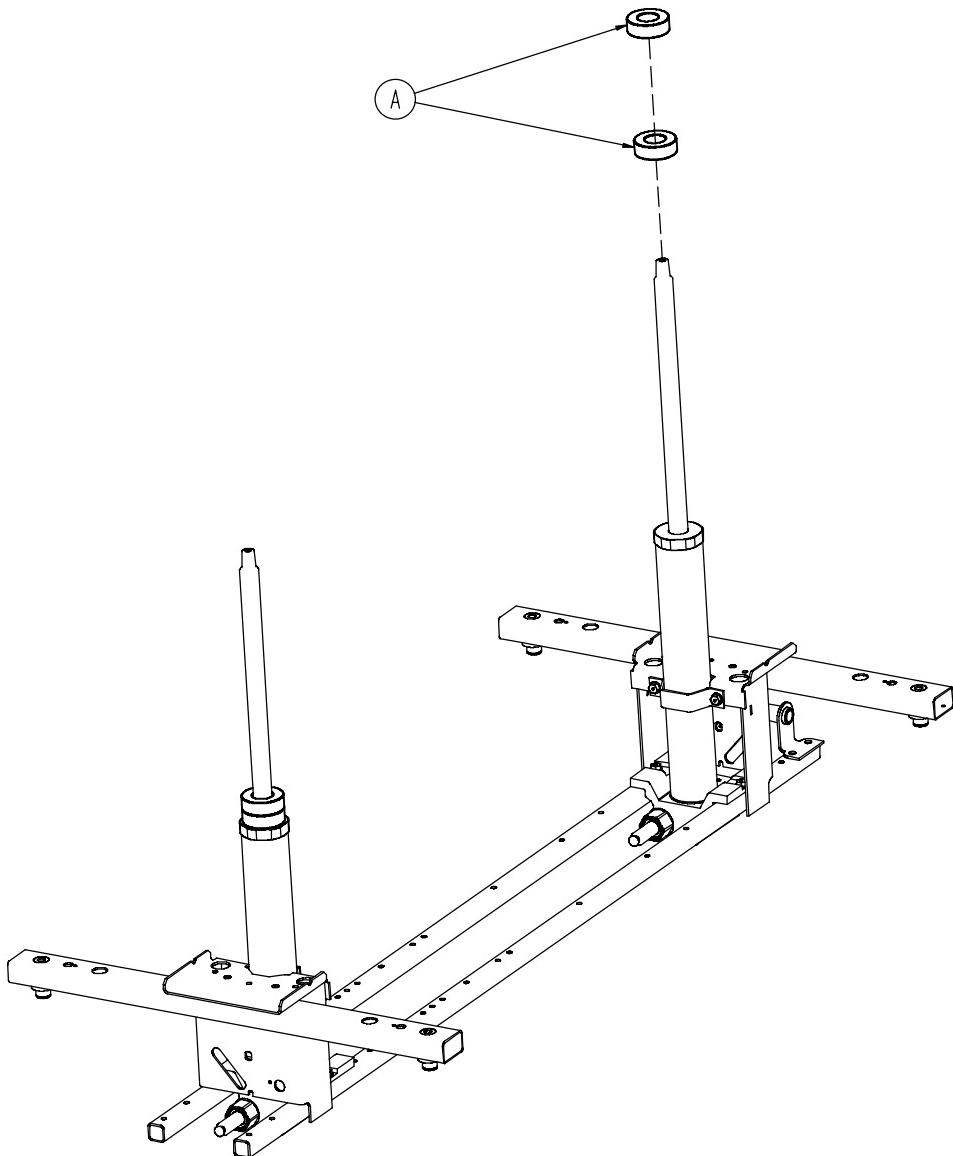


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------|------|
| A | 1040-010-027 | Trend Limiter | 4 |

Litter Assembly

Assembly part number 1069-030-110
(reference only)

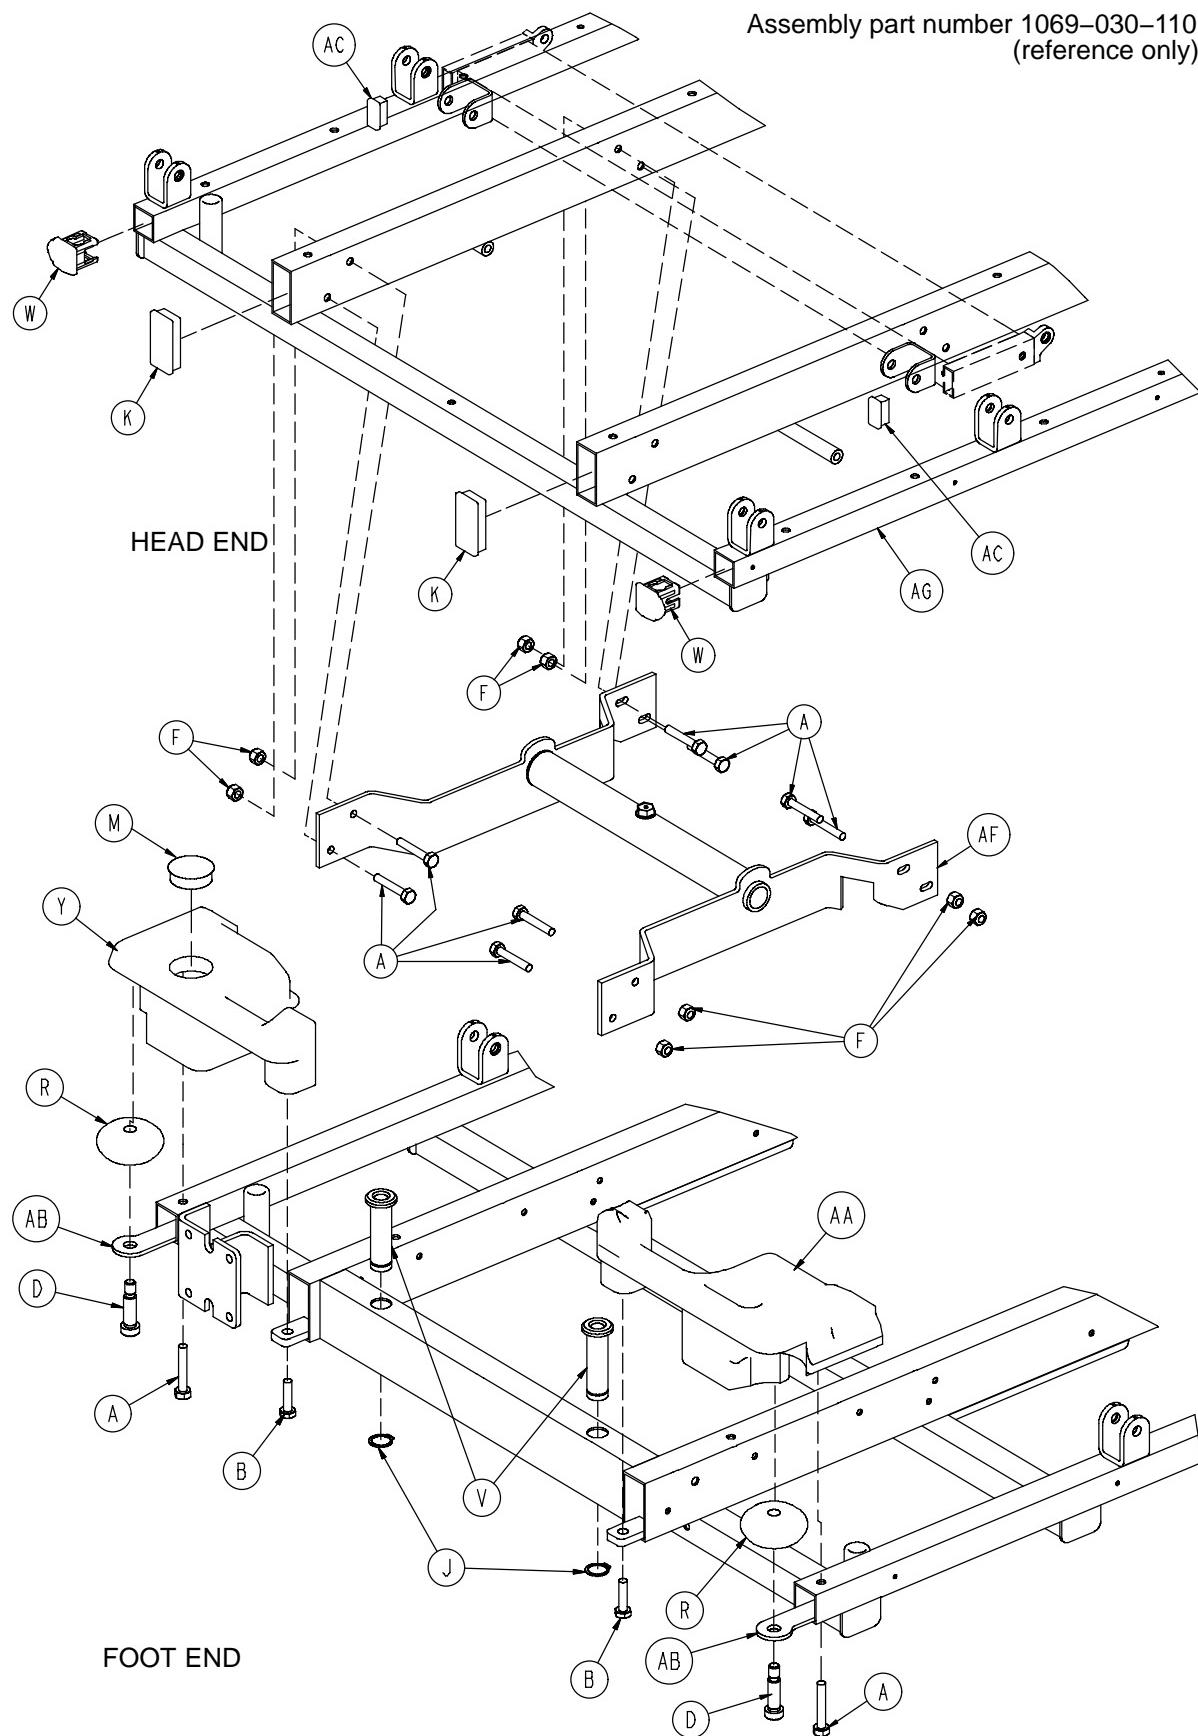


Litter Assembly

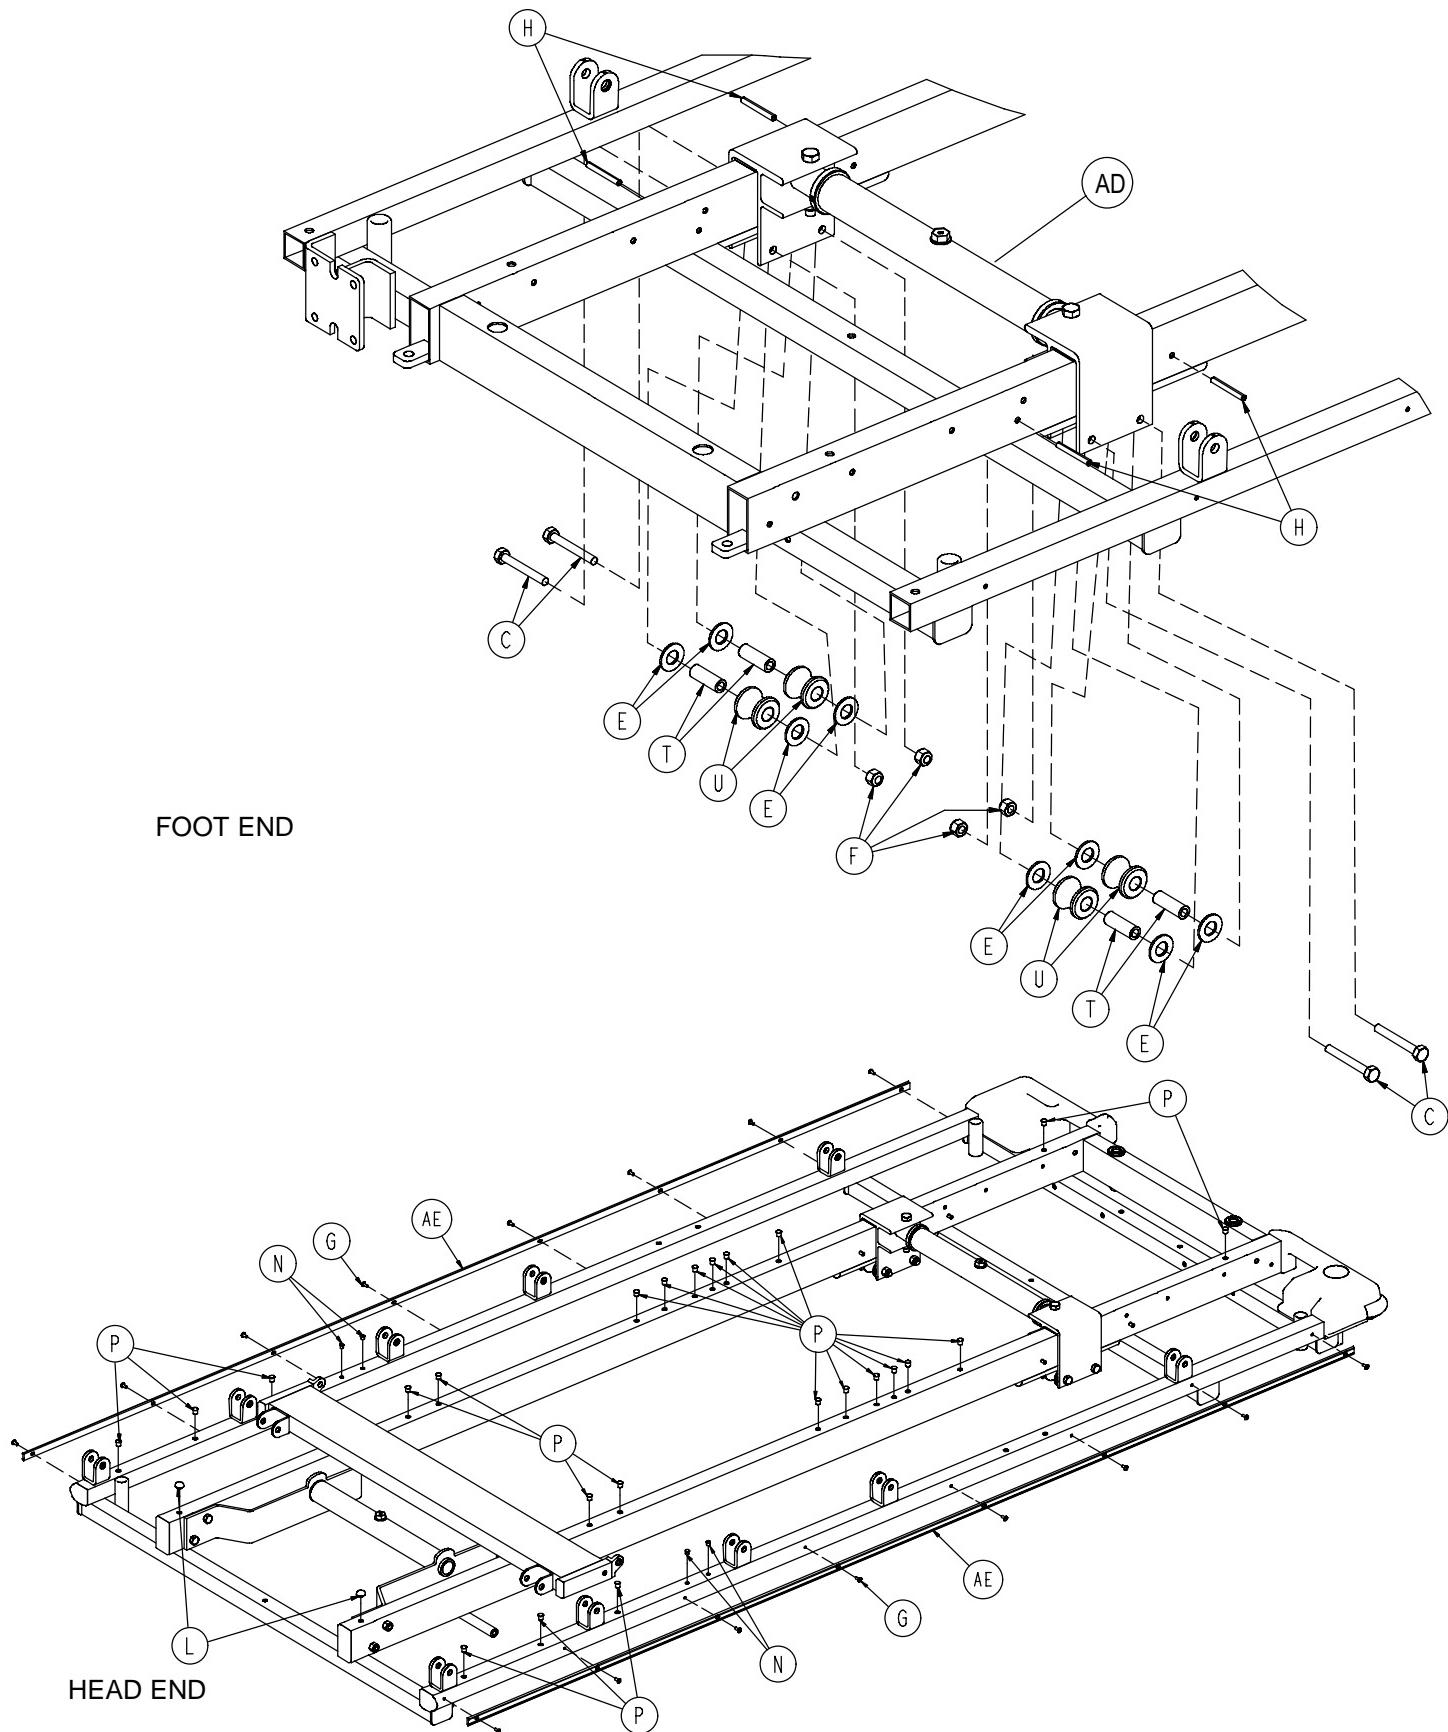

Litter Assembly


| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------------|------|
| A | 0003-047-000 | Hex Hd. Cap Screw | 10 |
| B | 0003-054-000 | Hex Hd. Cap Screw | 2 |
| C | 0003-076-000 | Hex Hd. Cap Screw | 4 |
| D | 0008-024-000 | Soc. Hd. Cap Screw | 2 |
| E | 0011-014-000 | Washer | 8 |
| F | 0016-028-000 | Hex Nut | 12 |
| G | 0025-038-000 | Rivet | 16 |
| H | 0026-057-000 | Slotted Spring Pin | 4 |
| J | 0028-023-000 | External Retaining Ring | 2 |
| K | 0037-049-000 | Hole Plug | 2 |
| L | 0037-052-000 | Rubber Bumper | 2 |
| M | 0037-059-000 | Hole Plug | 2 |
| N | 0037-074-000 | Hole Plug | 1 |
| P | 0721-031-065 | Hole Plug | 24 |
| R | 0721-032-049 | Roller Bumper | 2 |
| T | 0721-032-107 | Roller Sleeve | 4 |
| U | 0721-032-108 | Support Roller | 4 |
| V | 0721-040-026 | Footboard Receptacle | 2 |
| W | 1001-030-029 | End Plug | 2 |
| Y | 1010-001-013 | Cover, Foot, Right | 1 |
| AA | 1010-001-014 | Cover, Foot, Left | 1 |
| AB | 1010-001-017 | Roller Plate | 2 |
| AC | 1010-032-066 | Rectangular Hole Plug | 2 |
| AD | (page 56) | Jack Support Assembly, F/E | 1 |
| AE | 1068-020-038 | Bumper Channel | 2 |
| AF | (page 57) | Jack Support Assembly, H/E | 1 |
| AG | 1069-030-150 | Litter Frame Wldmnt. | 1 |

1010-032-210 Foot End Jack Support Assembly

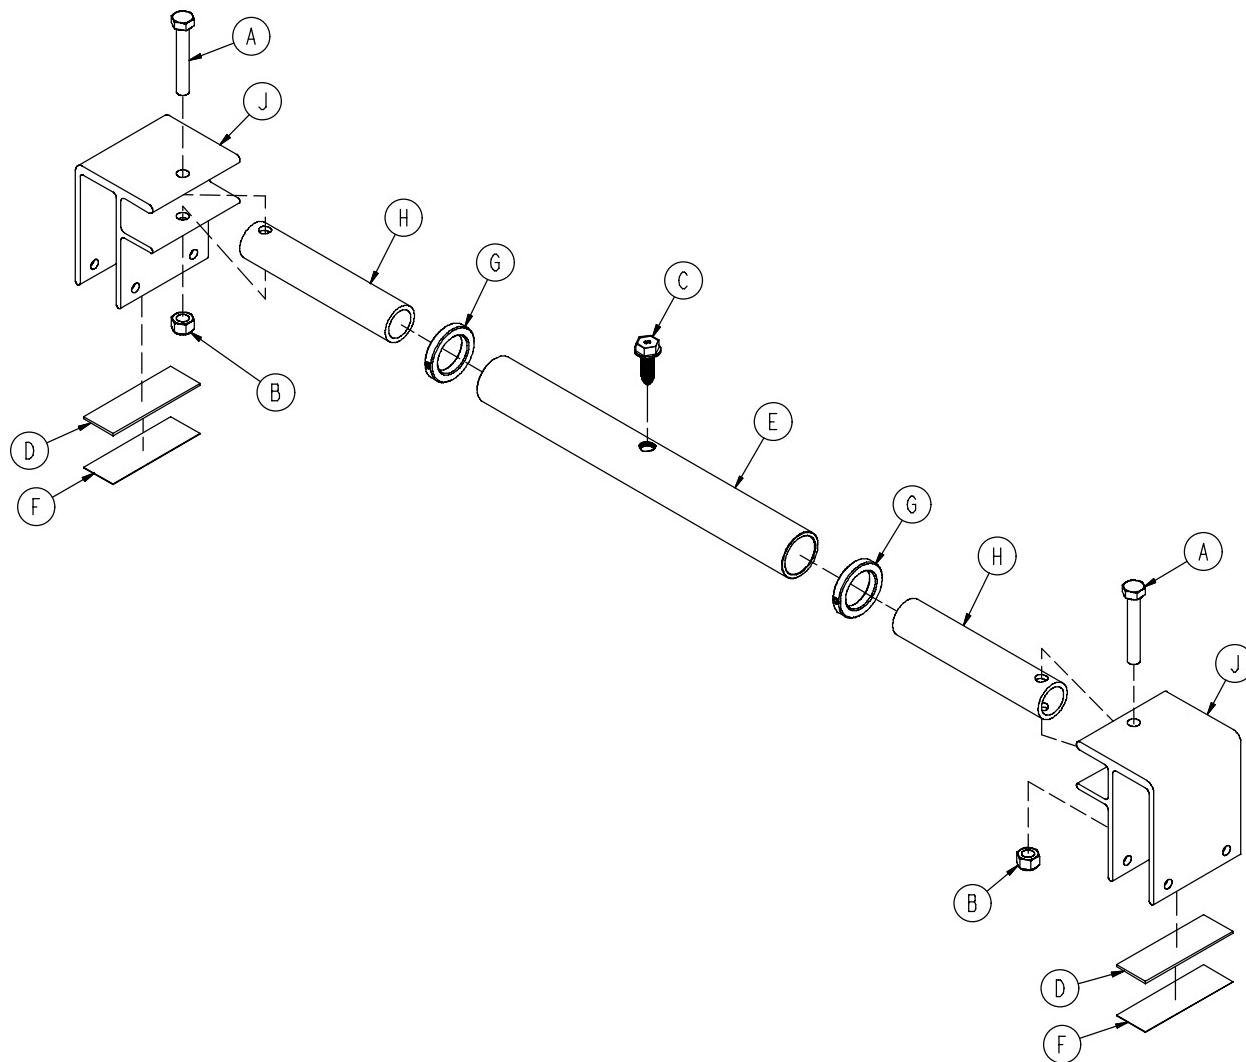


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|--------|
| A | 0003-040-000 | Hex Hd. Cap Screw | 2 |
| B | 0016-036-000 | Nylock Hex Nut | 2 |
| C | 0023-288-000 | Hex Washer Hd. Screw | 1 |
| D | 0044-029-000 | Double Sided Foam Tape | .5 ft. |
| E | 0753-010-029 | Support Tube | 1 |
| F | 0919-030-028 | Rack Glide | 2 |
| G | 0938-001-401 | Collar | 2 |
| H | 1010-032-064 | Carrier Tube | 2 |
| J | 1010-032-108 | Roller | 3 |

1069-030-130 Head End Jack Support Assembly

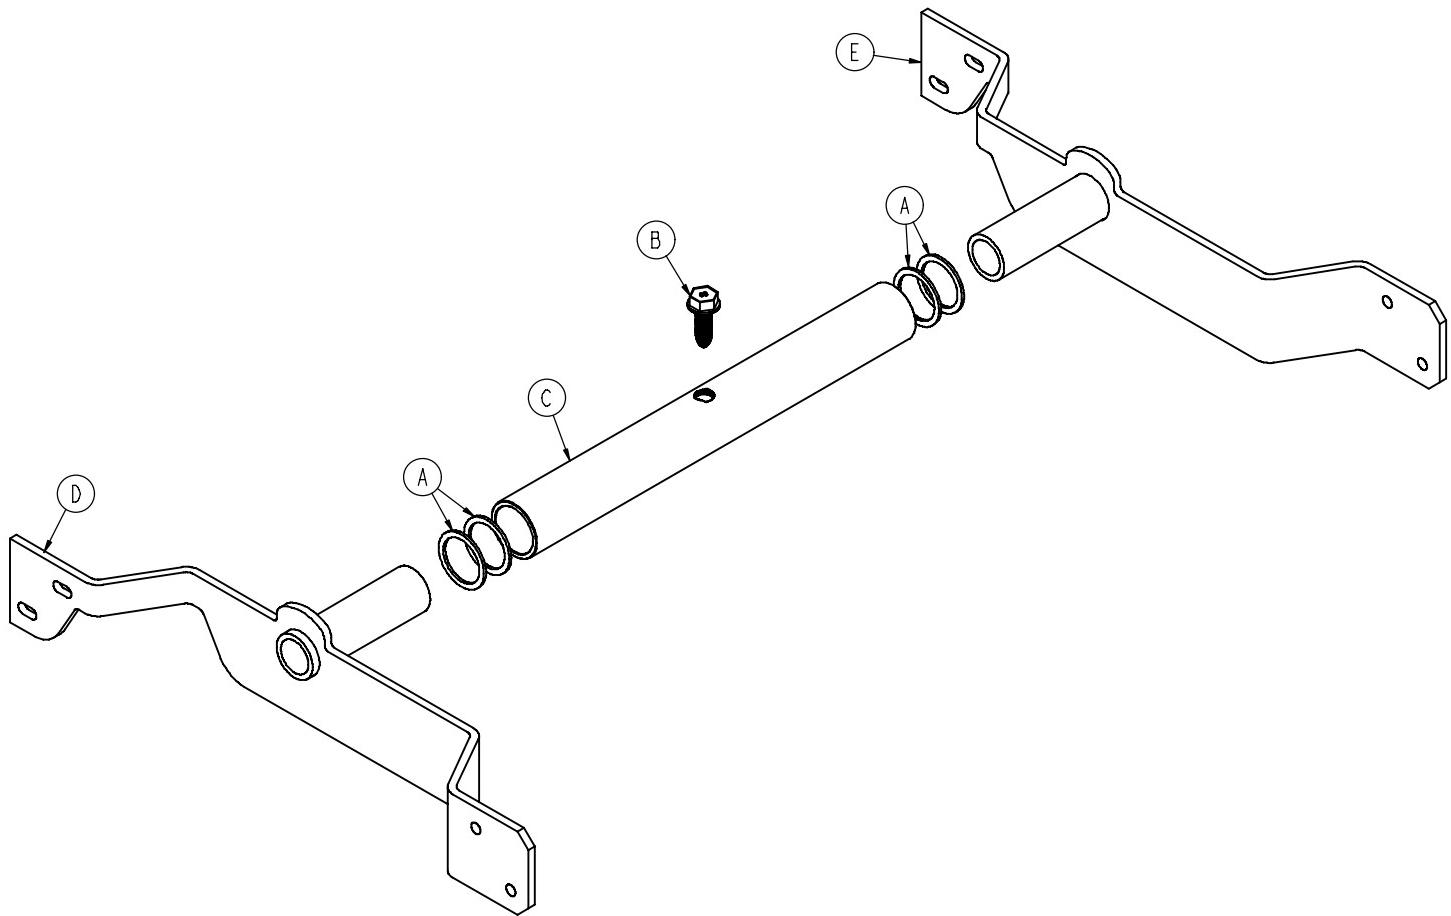

| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------|------|
| A | 0011-360-000 | Washer | 4 |
| B | 0023-288-000 | Hex Washer Hd. Screw | 1 |
| C | 0753-010-029 | Support Tube | 1 |
| D | 1069-030-120 | Jack Mount, Left | 1 |
| E | 1069-030-125 | Jack Mount, Right | 1 |


1069-032-120 Zero Articulating Pneumatic Fowler

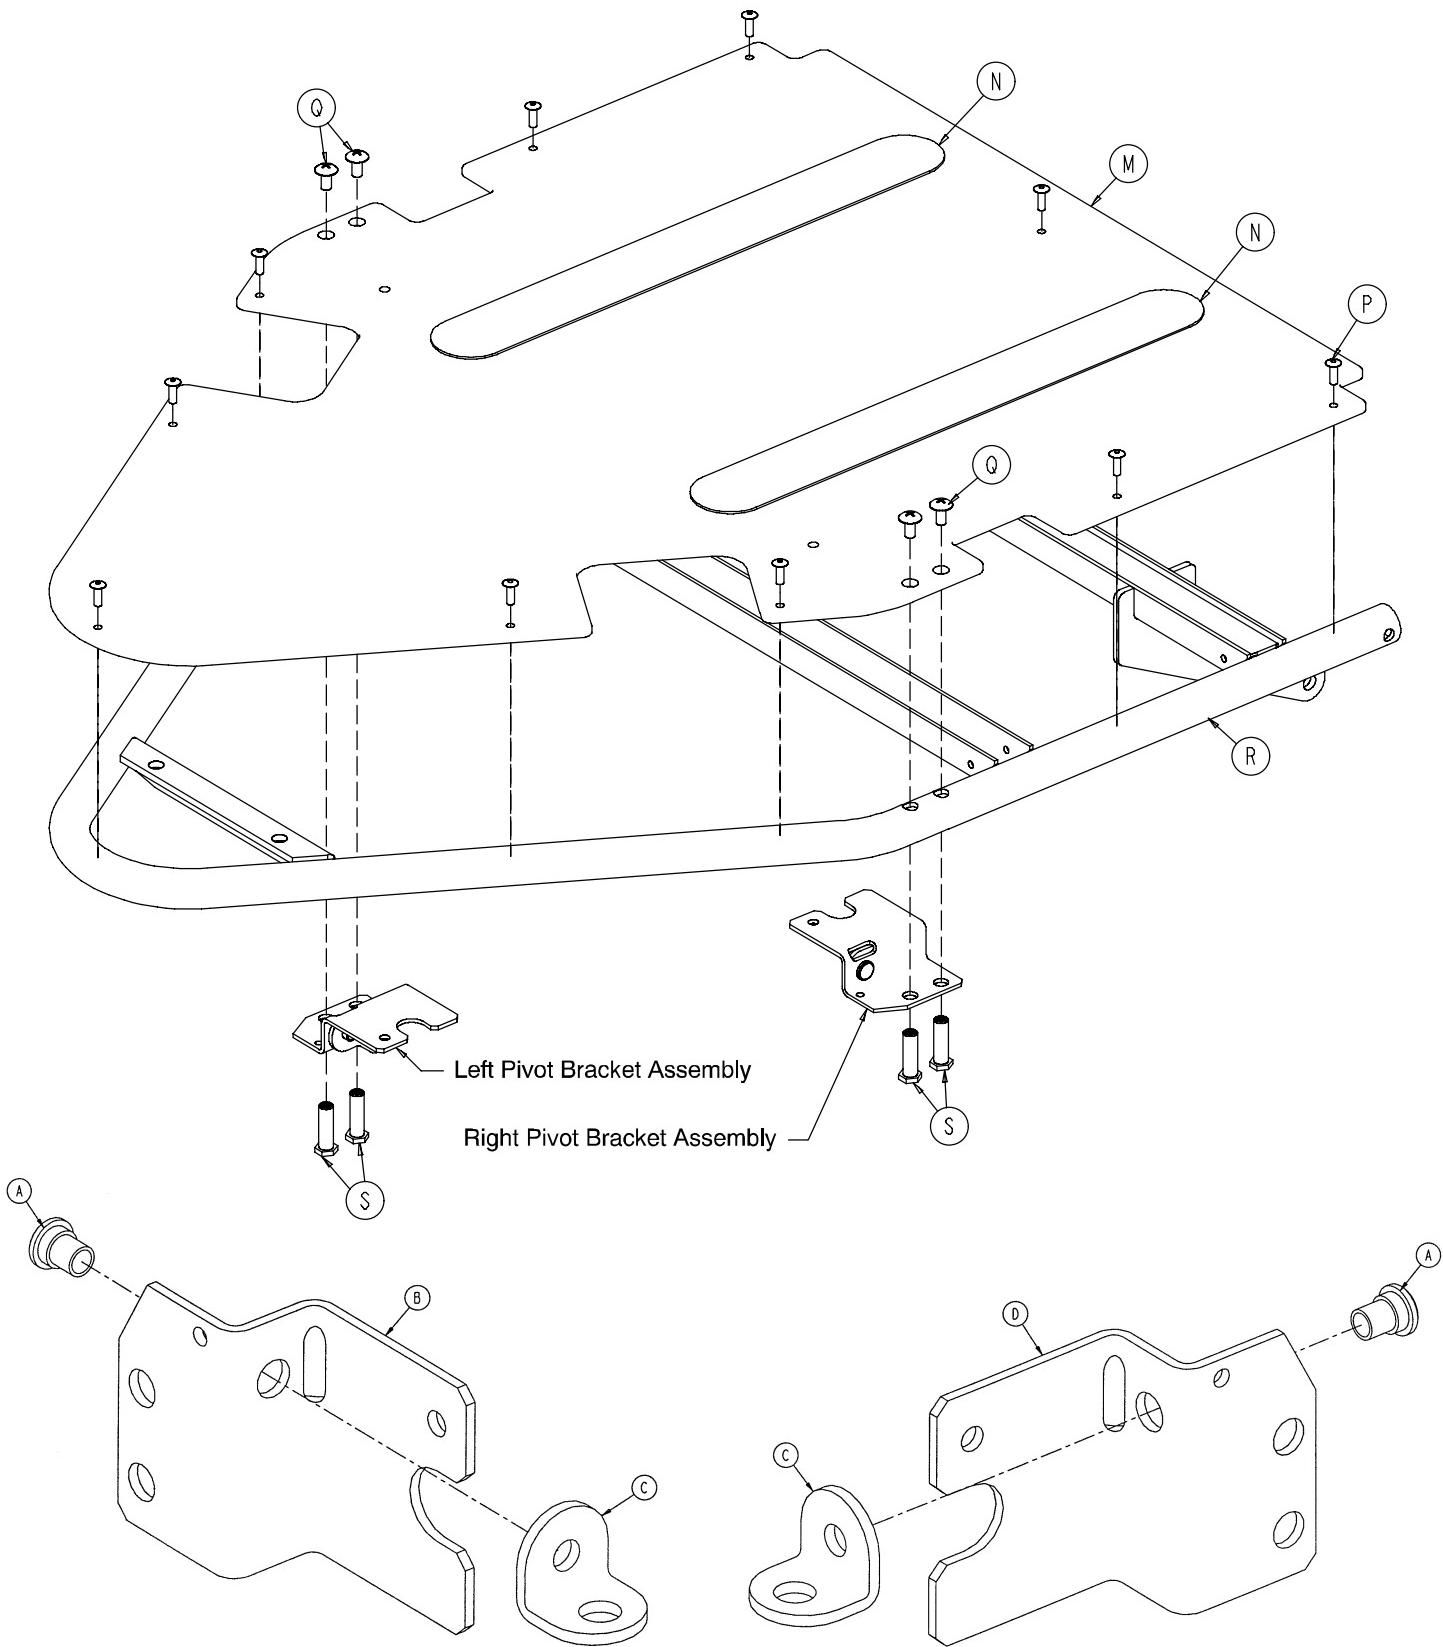


LEFT PIVOT BRACKET ASSEMBLY

RIGHT PIVOT BRACKET ASSEMBLY

1069-032-120 Zero Articulating Pneumatic Fowler

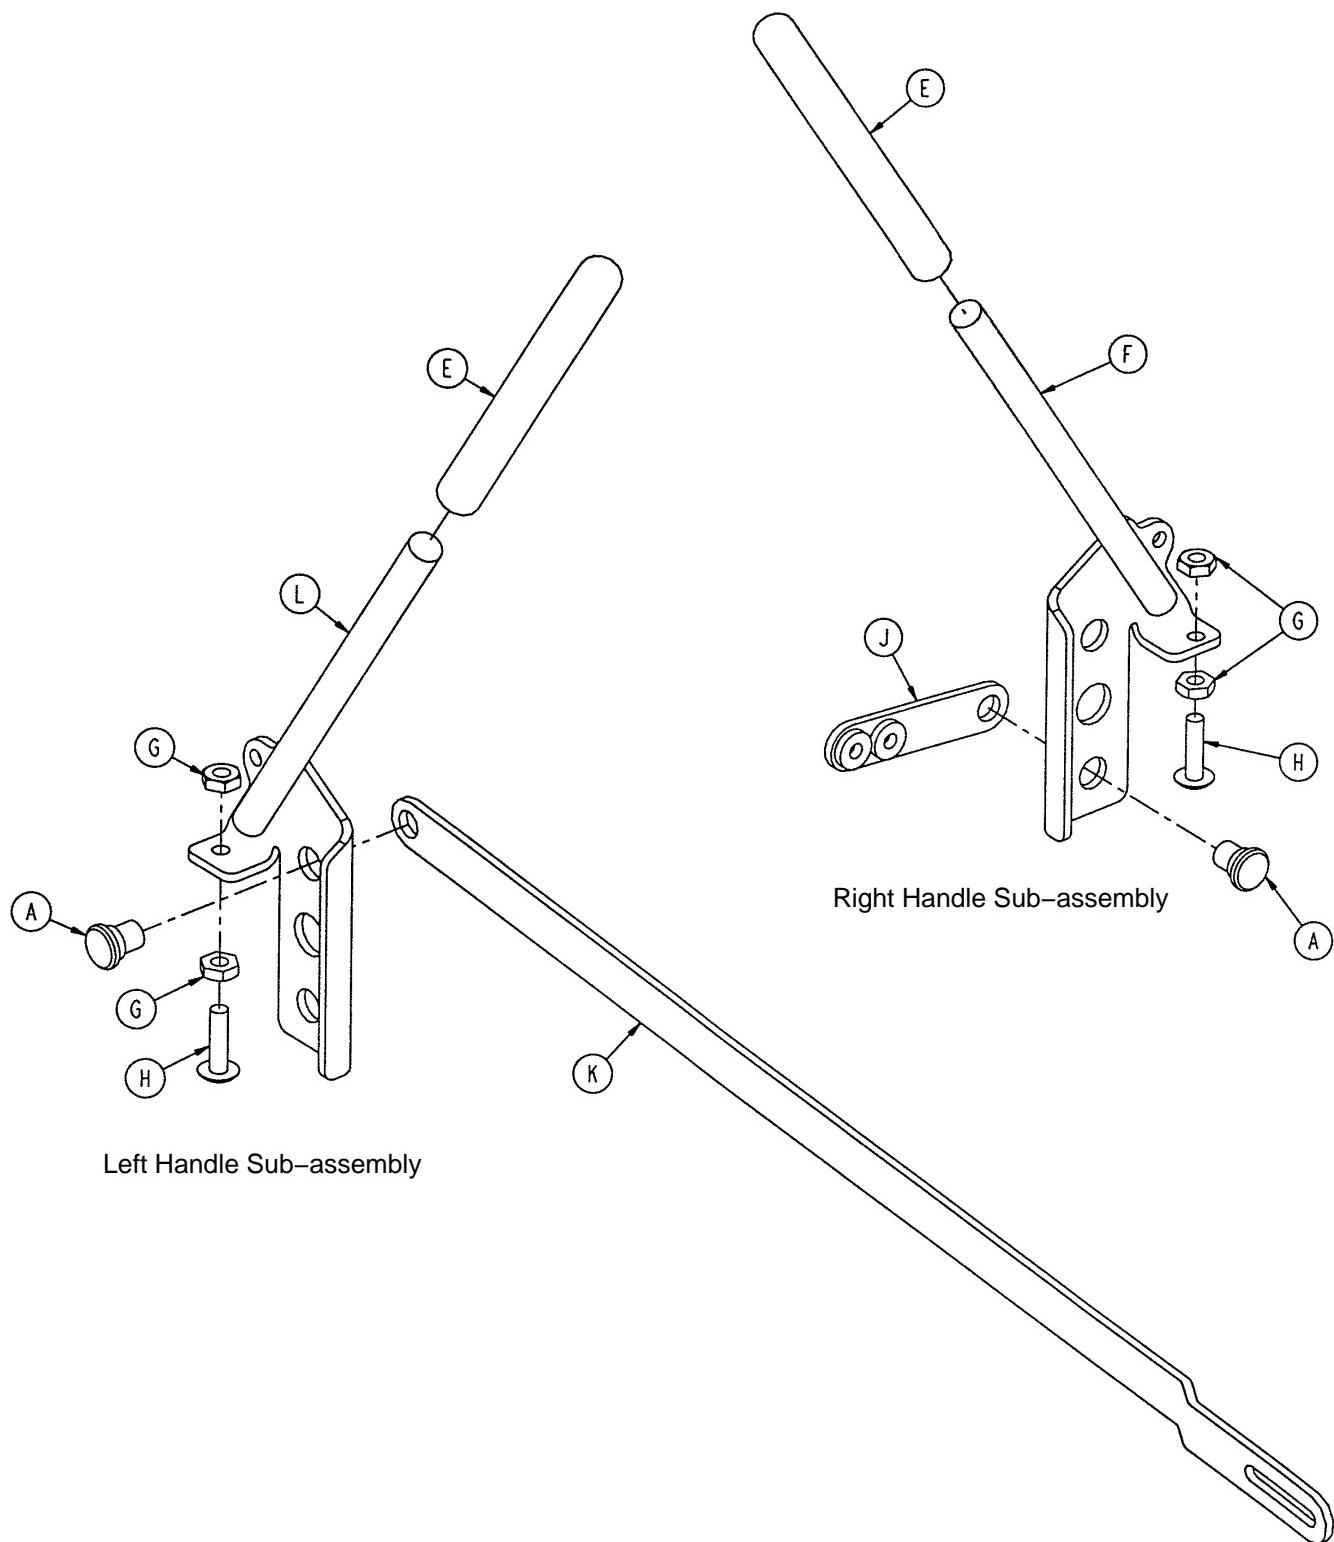


1069-032-120 Zero Articulating Pneumatic Fowler

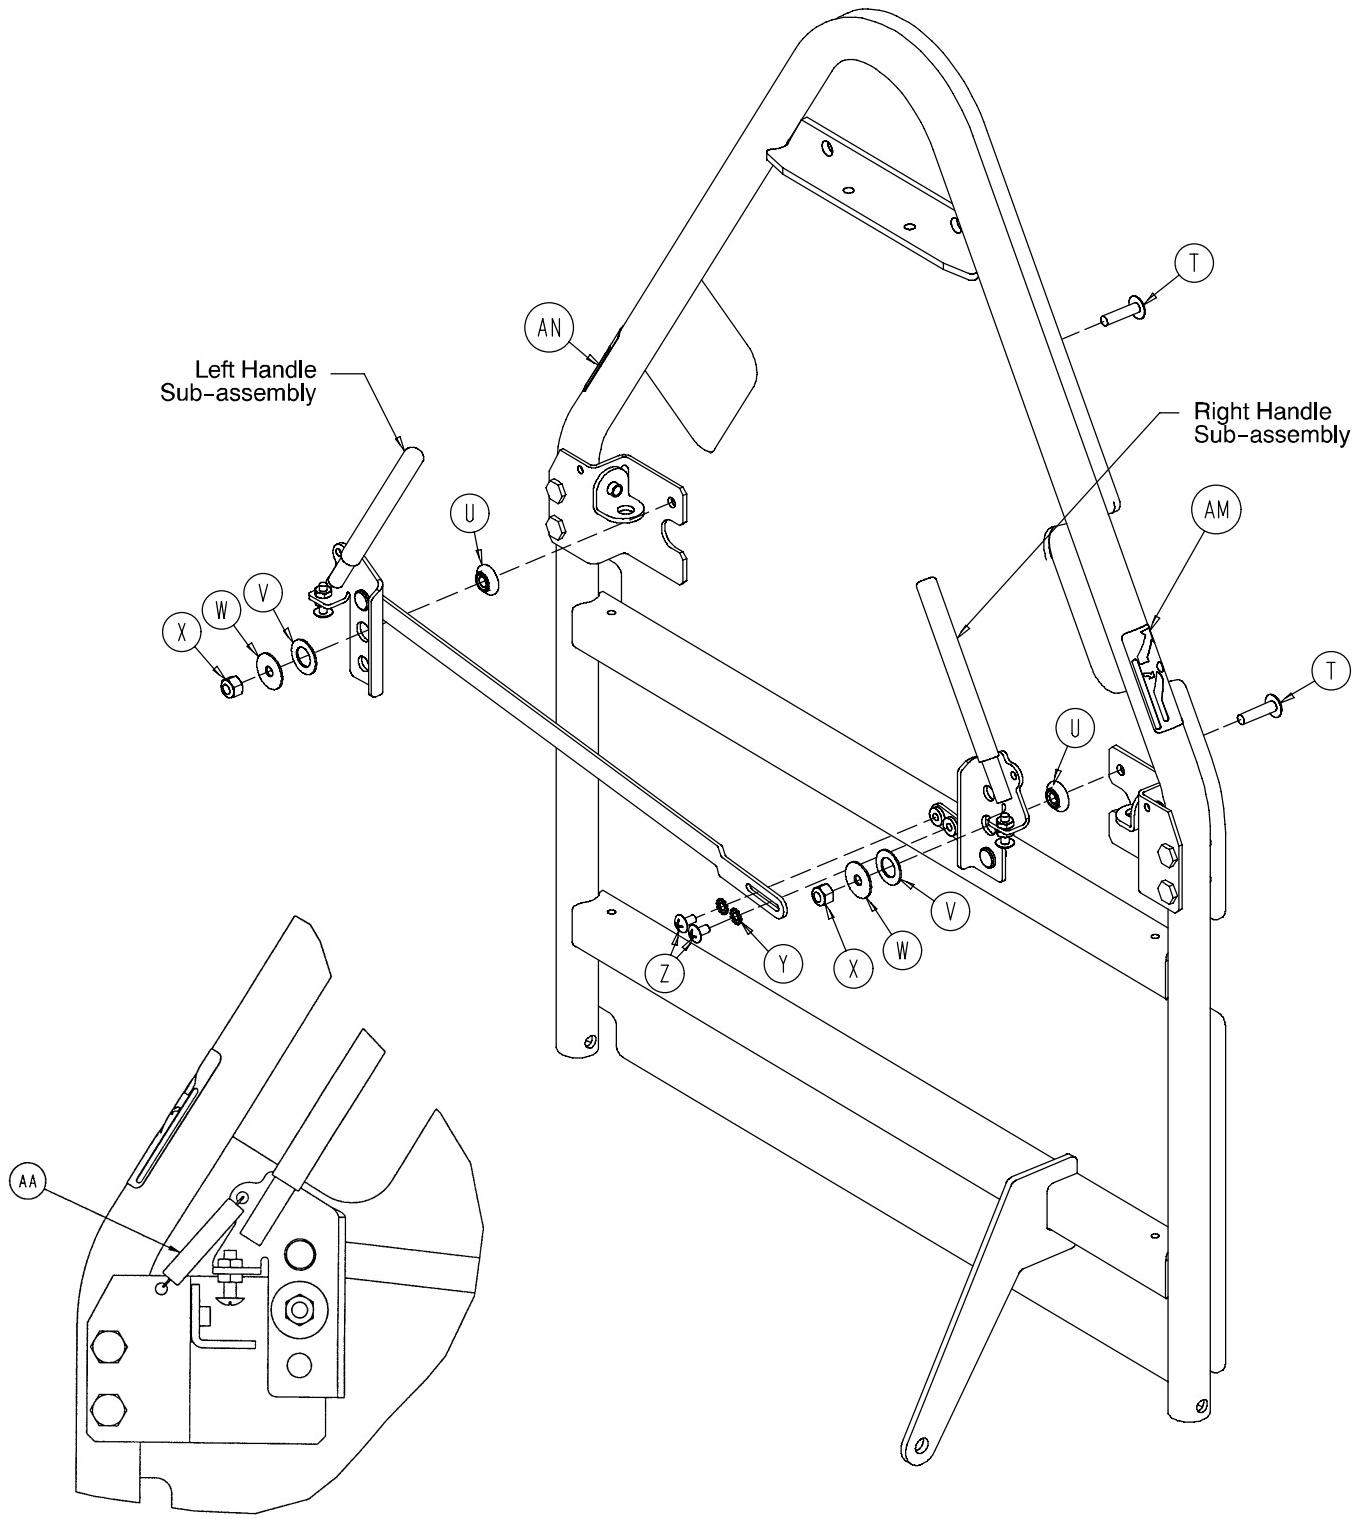


Spring Attachment – Both Sides

1069-032-120 Zero Articulating Pneumatic Fowler

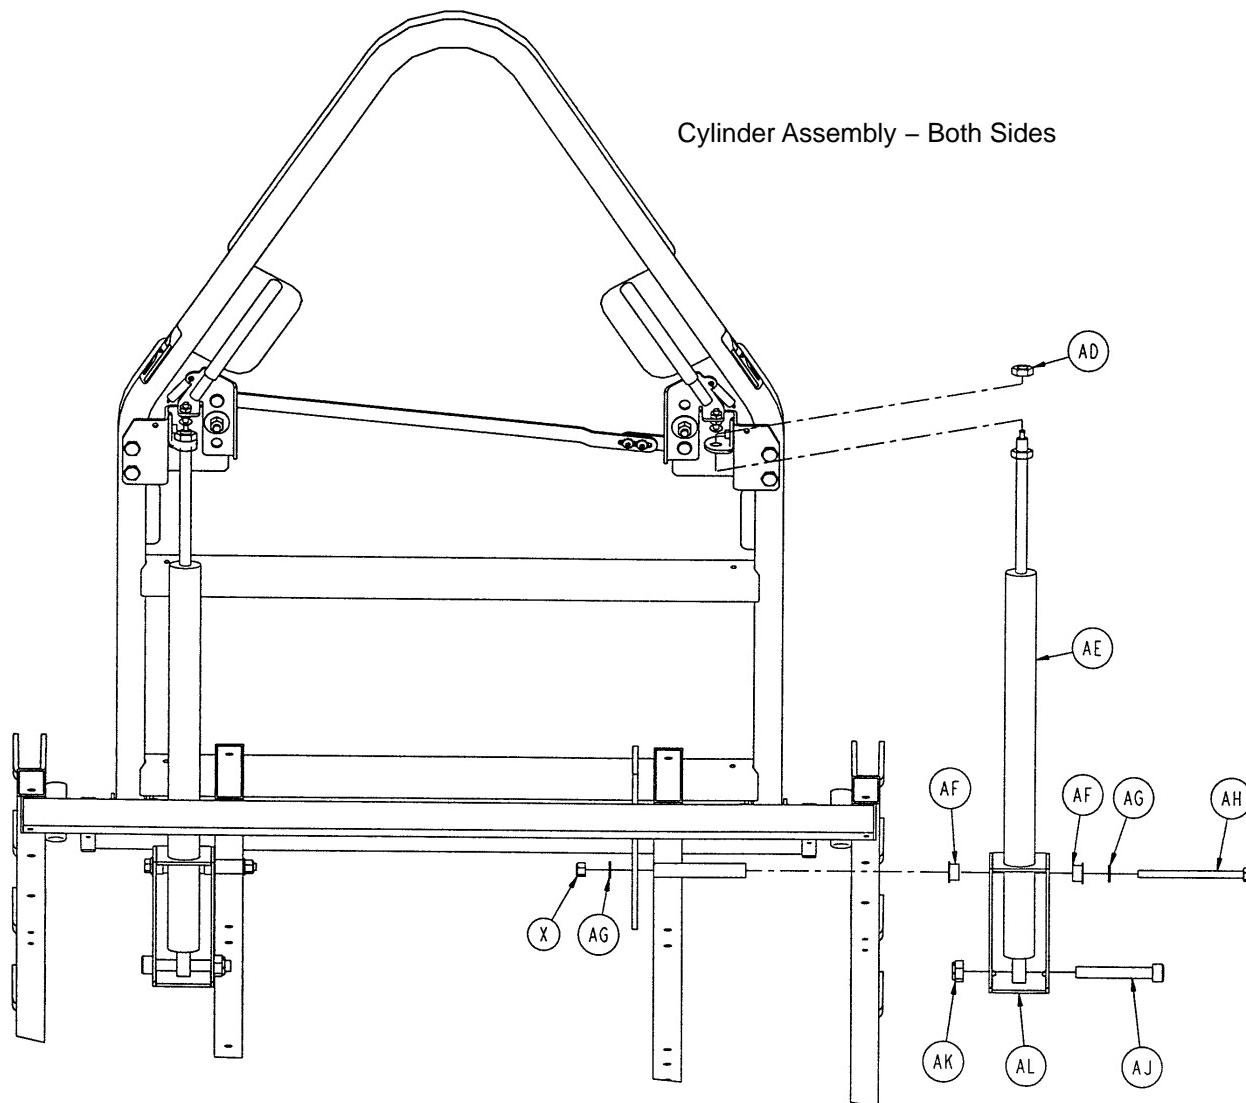


1069-032-120 Zero Articulating Pneumatic Fowler

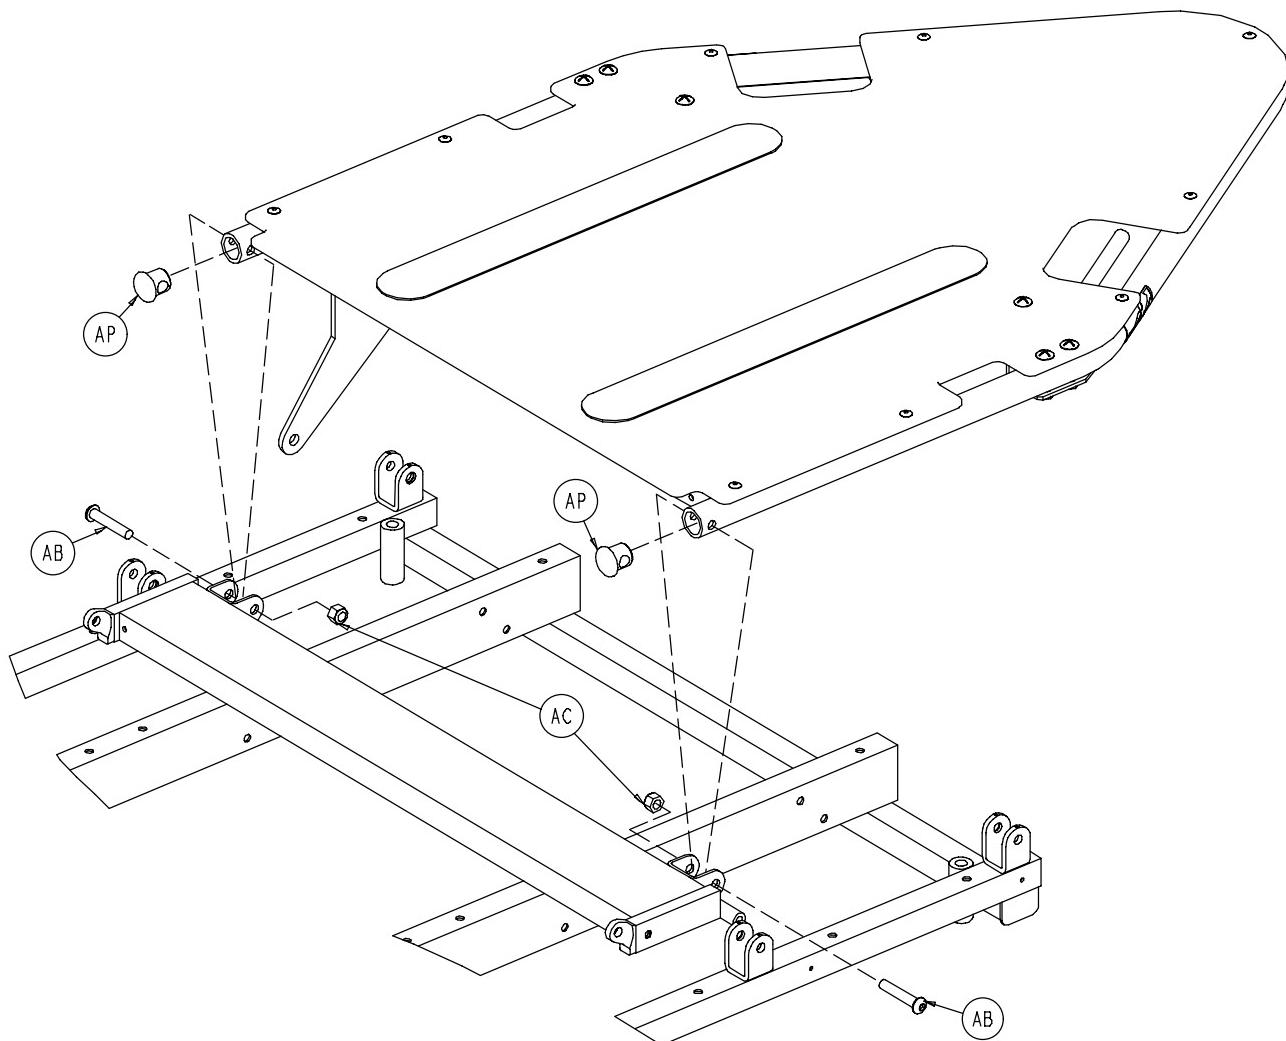


| Item | Part No. | Part Name | Qty. | Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|------|------|--------------|------------------------|------|
| A | 1069-031-011 | Rivet | 4 | V | 0014-087-000 | Nylon Flat Washer | 2 |
| B | 1069-031-041 | Handle Pivot Bracket, Lt. | 1 | W | 0011-180-000 | Steel Flat Washer | 2 |
| C | 1210-031-103 | "L" Bracket | 2 | X | 0016-028-000 | Nylock Nut | 4 |
| D | 1069-031-046 | Handle Pivot Bracket, Rt. | 1 | Y | 0013-018-000 | Ext. Tooth Lock Washer | 2 |
| E | 1069-031-200 | Red Handle Cover | 2 | Z | 0007-019-000 | Truss Hd. Screw | 2 |
| F | 1069-031-085 | Handle Weldment, Rt. | 1 | AA | 0038-436-000 | Extension Spring | 2 |
| G | 0015-003-000 | Jam Nut | 4 | AB | 0004-054-000 | Button Hd. Screw | 2 |
| H | 0007-050-000 | Truss Hd. Screw | 2 | AC | 0016-036-000 | Nylock Nut | 2 |
| J | 1069-031-031 | Handle Adj. Link, Short | 1 | AD | 0015-059-000 | M10 Nut | 2 |
| K | 1069-031-032 | Handle Adj. Link, Long | 1 | AE | 0360-031-077 | Pneumatic Cylinder | 2 |
| L | 1069-031-080 | Handle Weldment, Lt. | 1 | AF | 0052-086-000 | Nyliner | 4 |
| M | 1069-032-065 | Fowler Skin | 1 | AG | 0011-063-000 | Flat Washer | 4 |
| N | 7900-001-102 | Velcro Pile | 2 | AH | 0003-037-000 | Hex Hd. Cap Screw | 2 |
| P | 0025-050-000 | Pop Rivet | 10 | AJ | 0004-323-000 | M10 Soc. Hd. Cap Scr. | 2 |
| Q | 0007-042-000 | Truss Hd. Screw | 4 | AK | 0016-090-000 | M10 Nylock Nut | 2 |
| R | 1069-032-160 | Fowler Weldment | 1 | AL | 1069-031-036 | Cylinder Mounting Box | 2 |
| S | 1069-031-012 | Barrel Nut | 4 | AM | 1069-060-091 | Fowler Rel. Label, Rt. | 1 |
| T | 0007-062-000 | Truss Hd. Screw | 2 | AN | 1069-060-092 | Fowler Rel. Label, Lt. | 1 |
| U | 3001-300-099 | Fowler Pivot Bushing | 2 | AP | 1069-031-013 | Hole Plug | 2 |


1069-032-115 Single Articulating Pneumatic Fowler

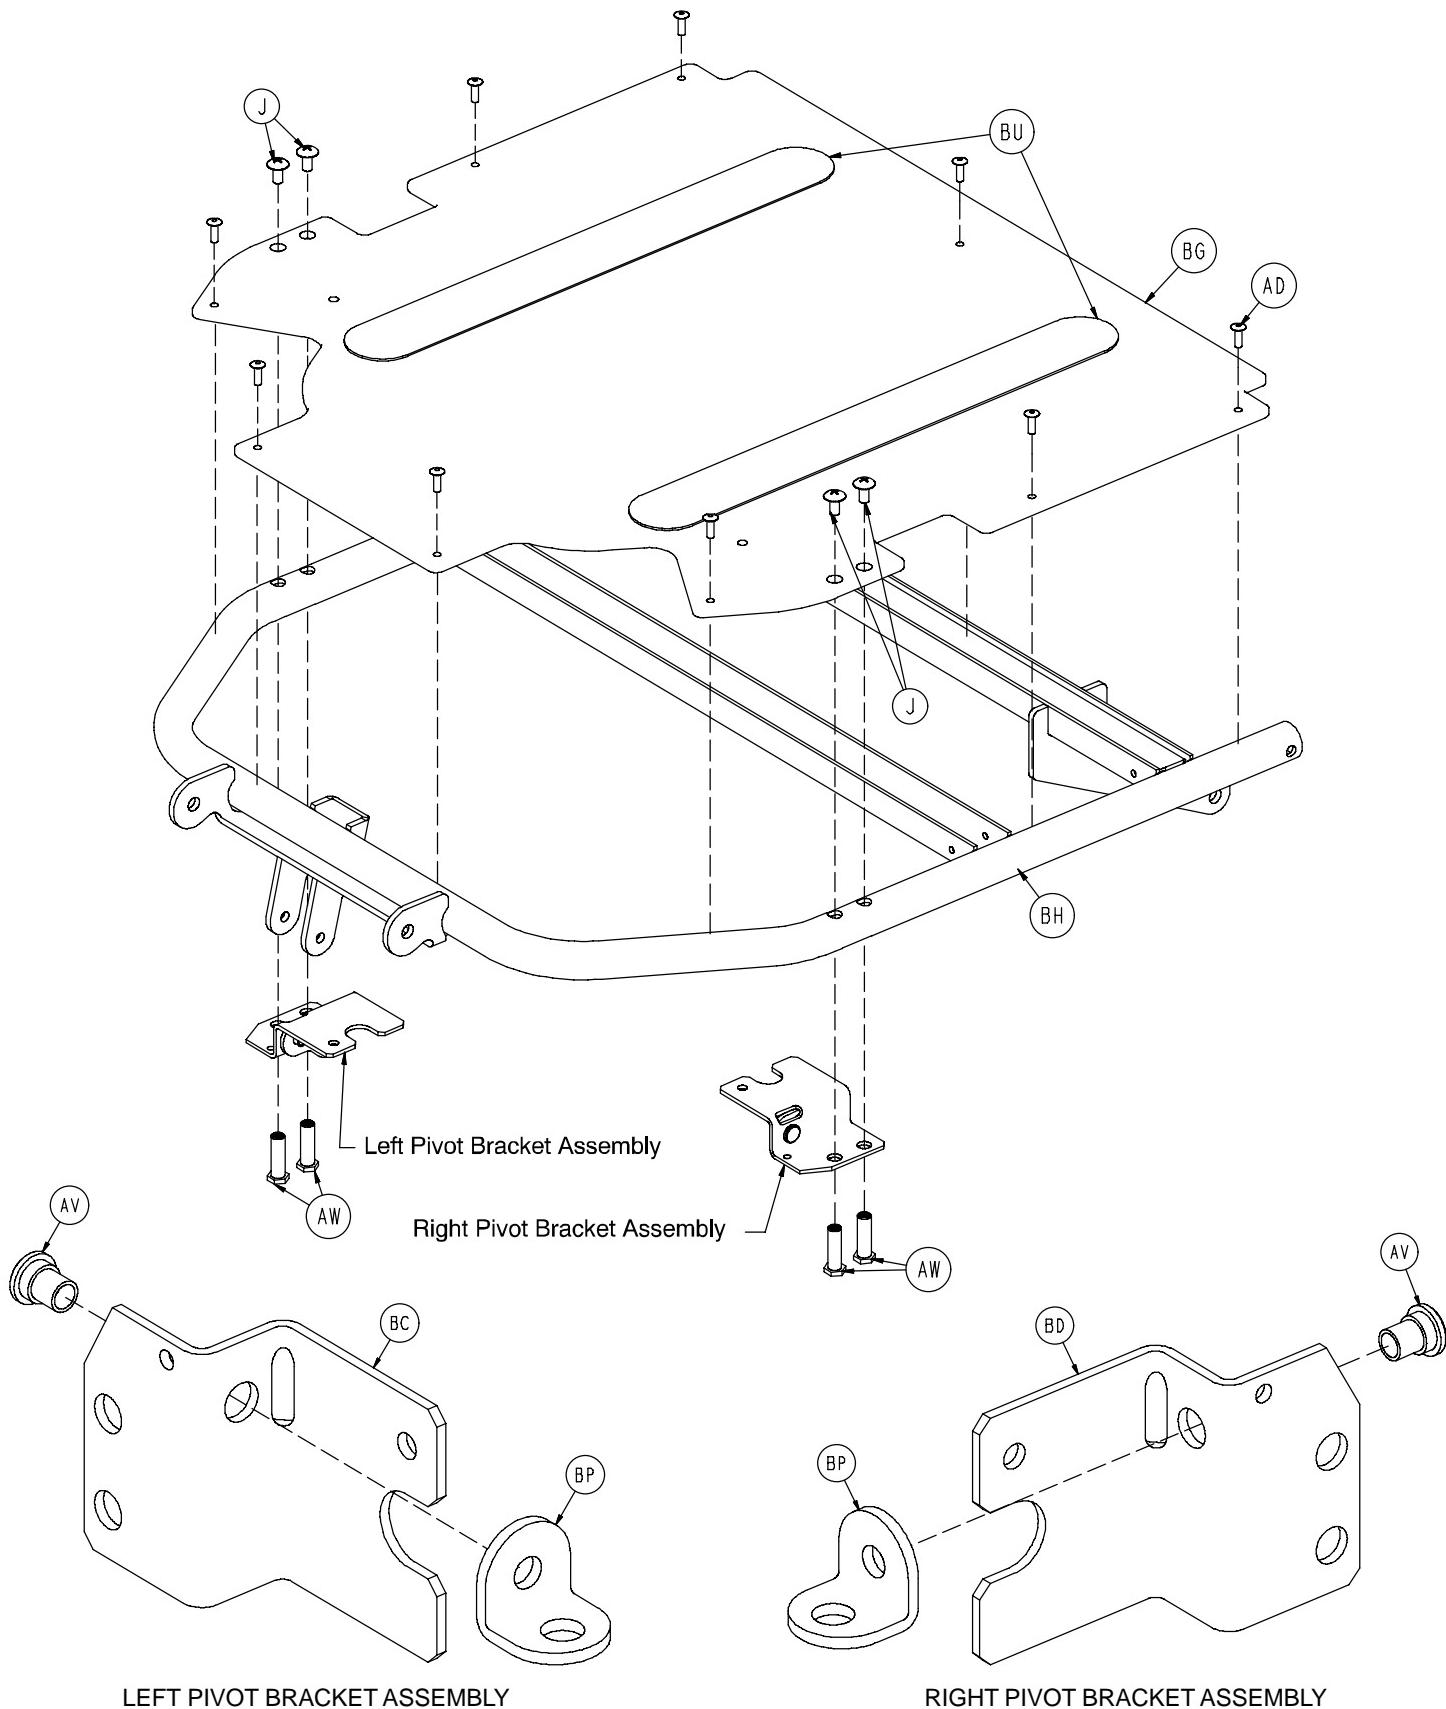



1069-032-115 Single Articulating Pneumatic Fowler

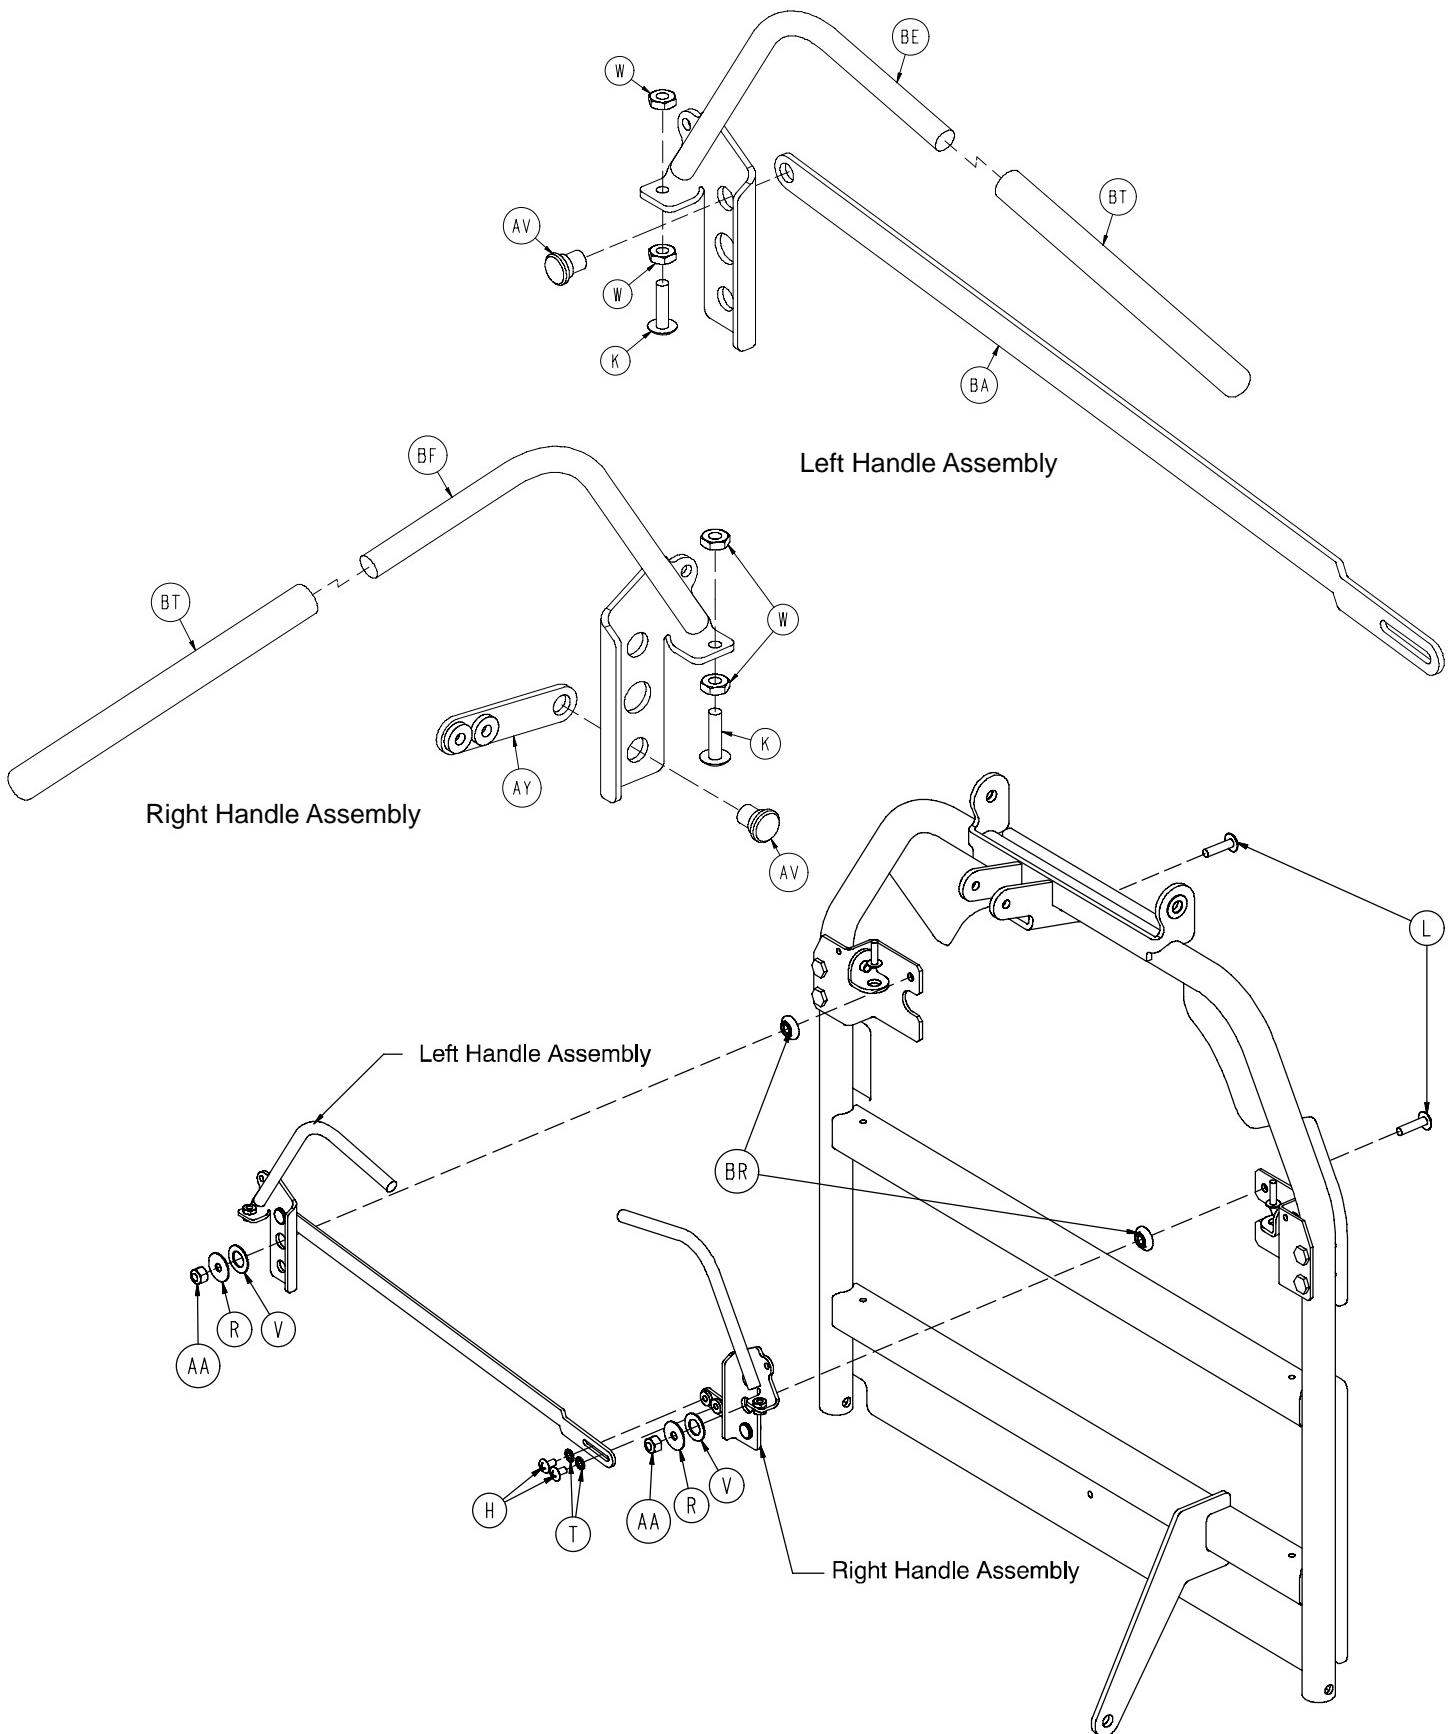

1069-032-115 Single Articulating Pneumatic Fowler

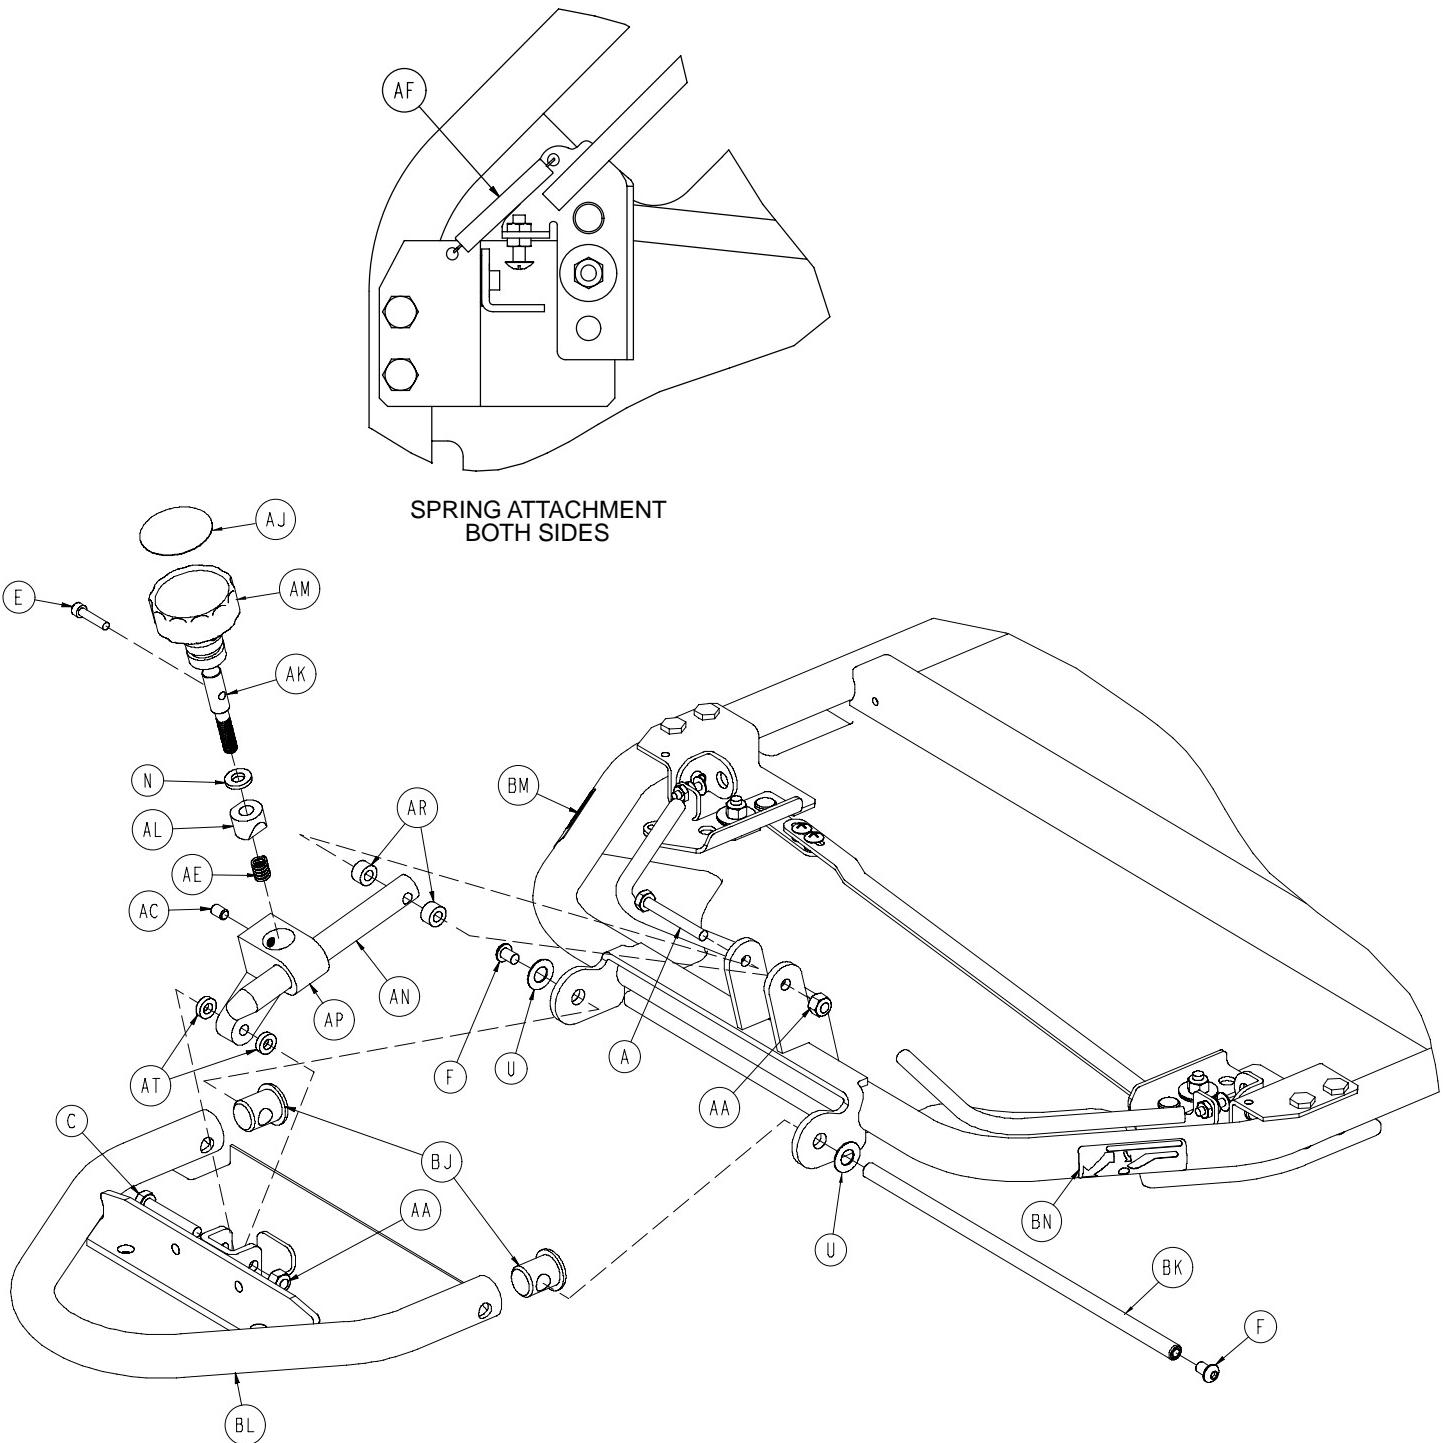


1069-032-115 Single Articulating Pneumatic Fowler

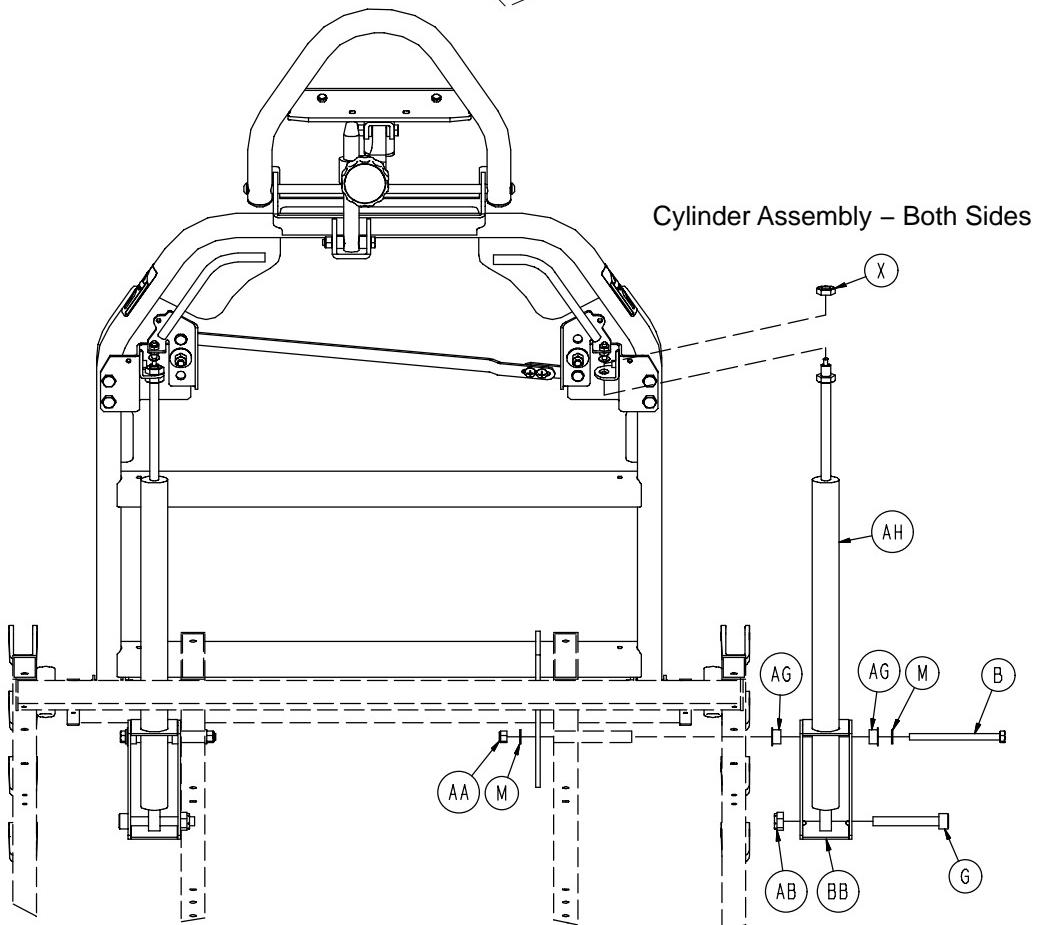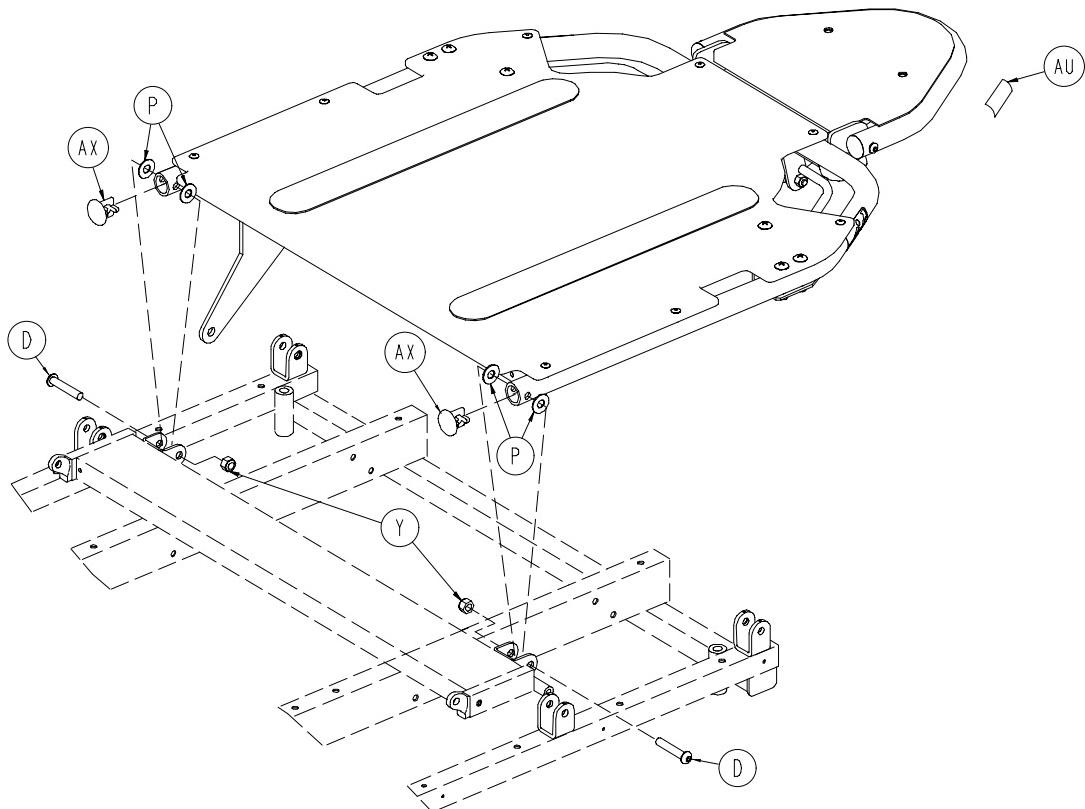


1069-032-115 Single Articulating Pneumatic Fowler

| Item | Part No. | Part Name | Qty. | Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|------|--------------|---------------------------|------|
| A | 0003-076-000 | Hex Hd. Cap Screw | 1 | AK | 0966-051-018 | Shaft | 1 |
| B | 0003-037-000 | Hex Hd. Cap Screw | 2 | AL | 0966-051-019 | Wedge Lock | 1 |
| C | 0003-078-000 | Hex Hd. Cap Screw | 1 | AM | 0966-051-024 | Modified Knob | 1 |
| D | 0004-054-000 | But. Hd. Cap Screw | 2 | AN | 0966-070-025 | Slide Bar | 1 |
| E | 0004-066-000 | Soc. Hd. Cap Screw | 1 | AP | 0966-070-027 | Bar Clamp | 1 |
| F | 0004-074-000 | But. Hd. Cap Screw | 2 | AR | 0966-070-036 | Spacer | 2 |
| G | 0004-323-000 | Soc. Hd. Cap Screw | 2 | AT | 0966-070-037 | Spacer | 2 |
| H | 0007-019-000 | Truss Hd. Mach. Screw | 2 | AU | 1010-091-057 | Max. Weight Label | 2 |
| J | 0007-042-000 | Truss Hd. Mach. Screw | 4 | AV | 1069-031-011 | Shoulder Rivet | 4 |
| K | 0007-050-000 | Truss Hd. Mach. Screw | 2 | AW | 1069-031-012 | Barrel Nut | 4 |
| L | 0007-062-000 | Truss Hd. Mach. Screw | 2 | AX | 1069-031-013 | 1" Hole Plug | 2 |
| M | 0011-063-000 | Washer | 4 | AY | 1069-031-031 | Short Handle Adj. Link | 1 |
| N | 0011-108-000 | Washer | 1 | BA | 1069-031-032 | Long Handle Adj. Link | 1 |
| P | 0011-179-000 | Washer | 4 | BB | 1069-031-036 | Cylinder Mounting Box | 2 |
| R | 0011-180-000 | Washer | 2 | BC | 1069-031-041 | Handle Pivot Brkt., Lt. | 1 |
| T | 0013-018-000 | Ext. Tooth Lock Washer | 2 | BD | 1069-031-046 | Handle Pivot Brkt., Rt. | 1 |
| U | 0014-020-000 | Washer | 2 | BE | 1069-031-070 | Left Handle Weldment | 1 |
| V | 0014-087-000 | Washer | 2 | BF | 1069-031-075 | Right Handle Weldment | 1 |
| W | 0015-003-000 | Hex Nut | 4 | BG | 1069-032-075 | Fowler Skin | 1 |
| X | 0015-059-000 | Nylock Hex Nut | 2 | BH | 1069-032-170 | Fowler Weldment | 1 |
| Y | 0016-036-000 | Hex Nut | 2 | BJ | 1069-033-107 | 1" Hole Plug | 2 |
| AA | 0016-028-000 | Hex Nut | 6 | BK | 1069-033-108 | Head Pivot Shaft | 1 |
| AB | 0016-090-000 | Nylock Hex Nut | 2 | BL | 1069-033-110 | Head Piece Weldment | 1 |
| AC | 0021-073-000 | Set Screw | 1 | BM | 1069-060-091 | Fowler Release Label, Rt. | 1 |
| AD | 0025-050-000 | Rivet | 9 | BN | 1069-060-092 | Fowler Release Label, Lt. | 1 |
| AE | 0038-171-000 | Compression Spring | 1 | BP | 1210-031-103 | Pivot Tab | 2 |
| AF | 0038-436-000 | Extension Spring | 2 | BR | 3001-300-099 | Modified Bushing | 2 |
| AG | 0052-086-000 | Nyliner | 4 | BT | 5050-531-200 | Vinyl Cap | 2 |
| AH | 0360-031-077 | Gas Cylinder | 2 | BU | 7900-001-102 | Velcro Pile | 2 |
| AJ | 0966-001-065 | Lock Label | 1 | | | | |


1069-132-110 Dual Articulating Pneumatic Fowler

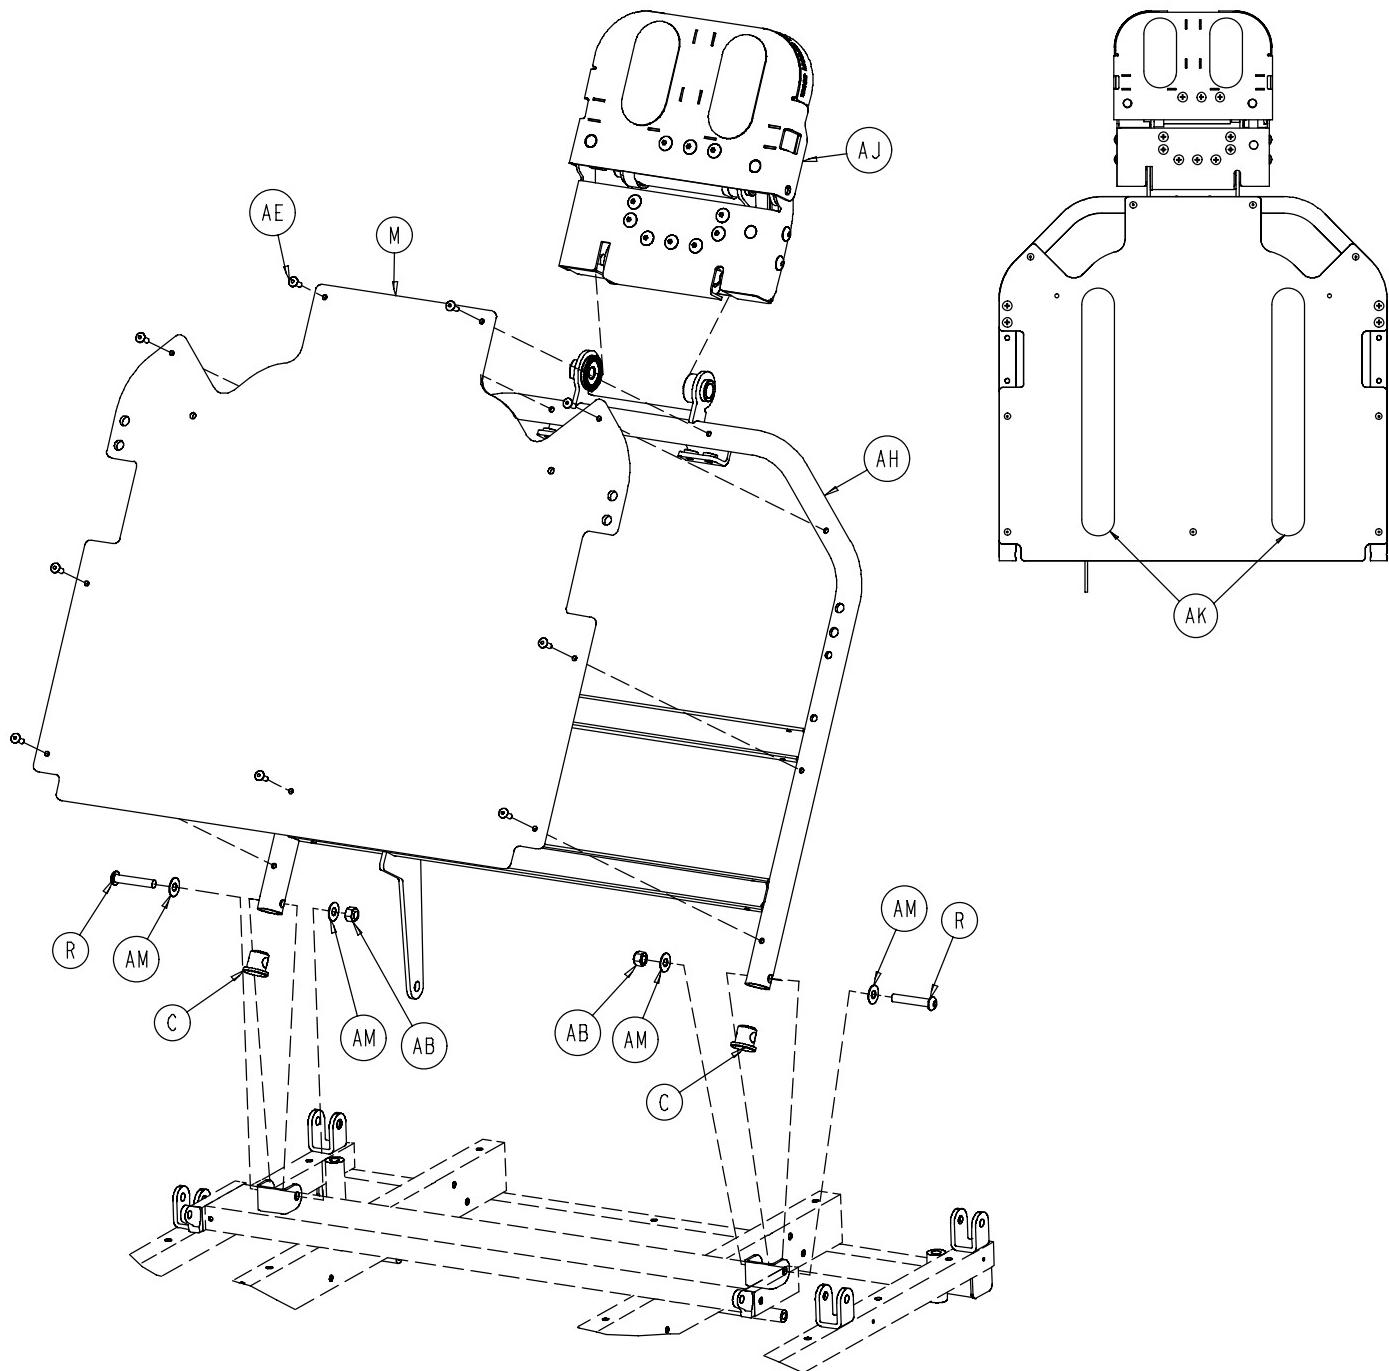

1069-132-110 Dual Articulating Pneumatic Fowler

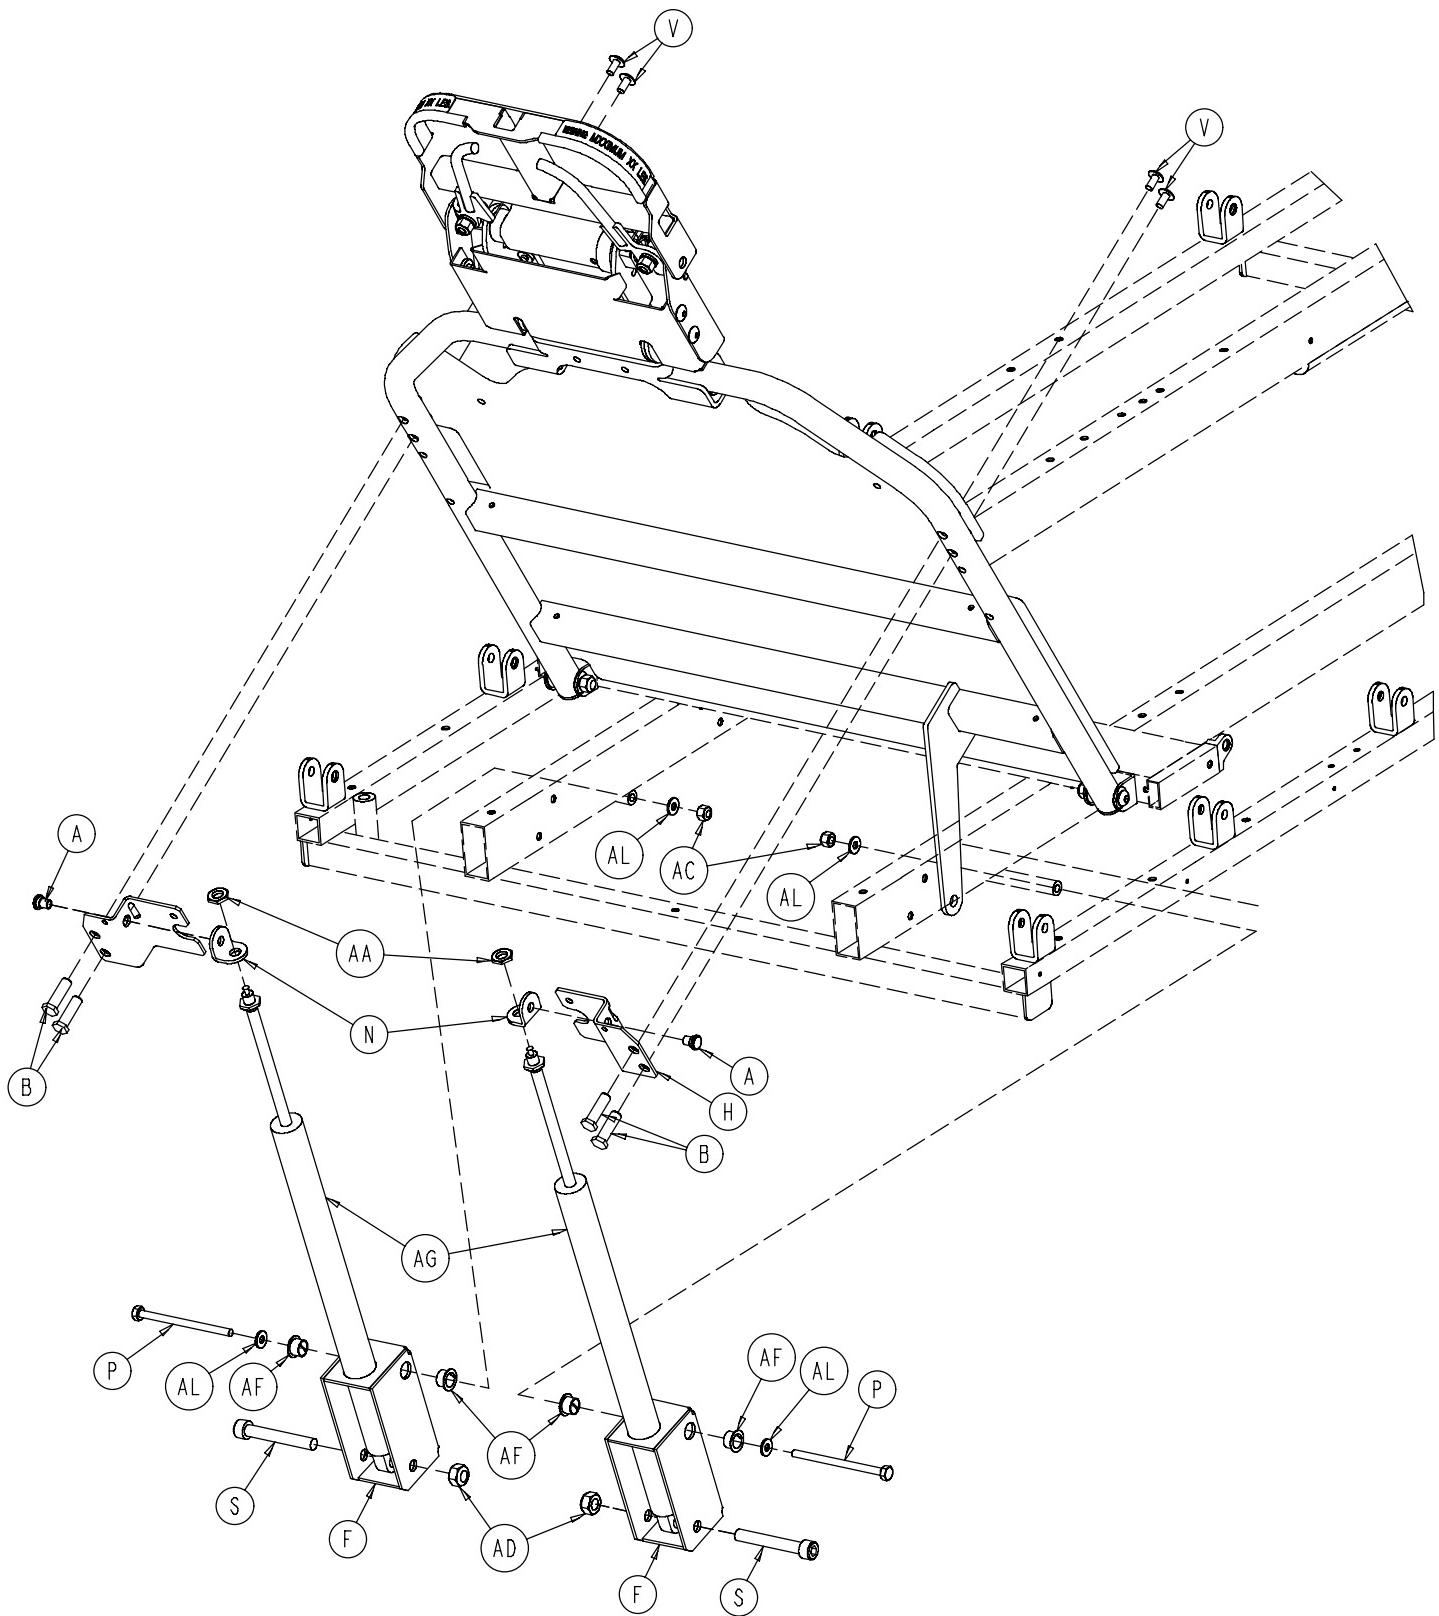


1069-132-110 Dual Articulating Pneumatic Fowler

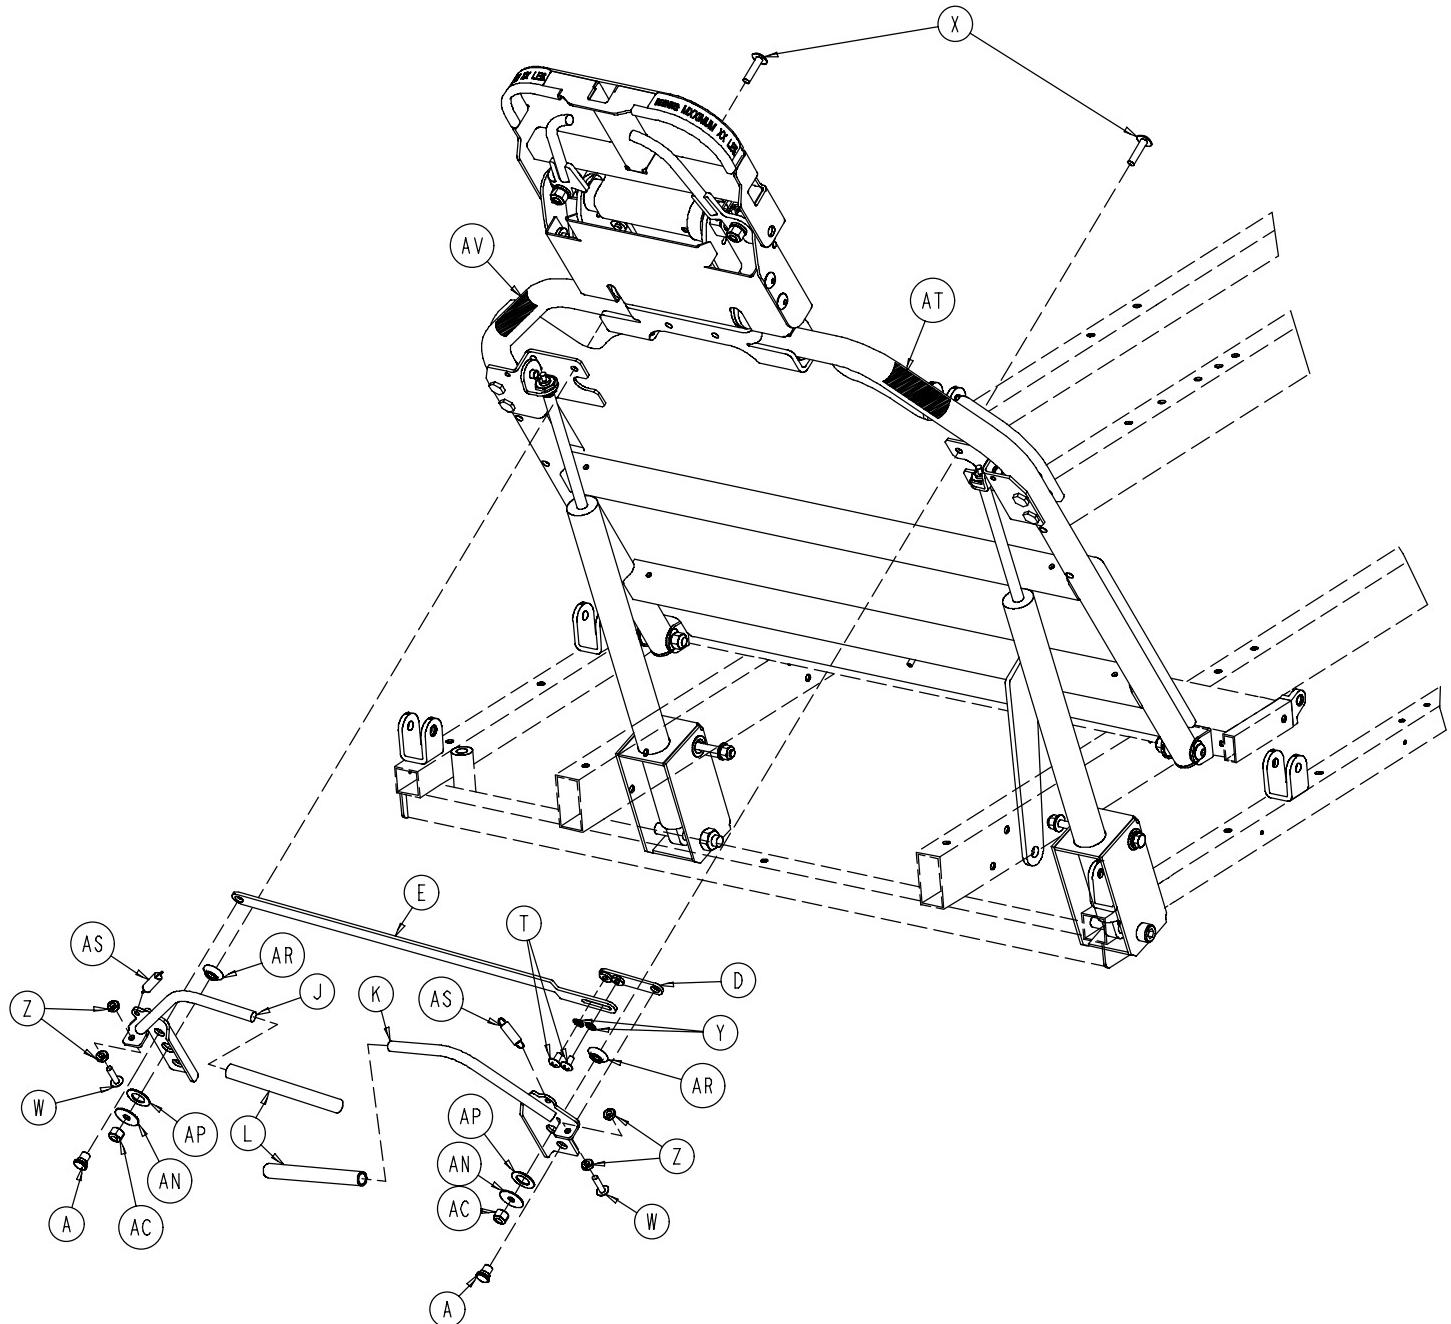


1069-132-110 Dual Articulating Pneumatic Fowler

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------------|------|
| A | 1069-031-011 | Rivet | 4 |
| B | 1069-031-012 | Barrel Nut | 4 |
| C | 1069-031-013 | Hole Plug | 2 |
| D | 1069-031-031 | Short Handle Adjustment Link | 1 |
| E | 1069-031-032 | Long Handle Adjustment Link | 1 |
| F | 1069-031-036 | Cylinder Mounting Box | 2 |
| G | 1069-031-041 | Handle Pivot Bracket, Left | 1 |
| H | 1069-031-046 | Handle Pivot Bracket, Right | 1 |
| J | 1069-031-060 | Handle Weldment, Left | 1 |
| K | 1069-031-065 | Handle Weldment, Right | 1 |
| L | 1069-031-200 | Handle Cap | 2 |
| M | 1069-032-055 | Fowler Skin | 1 |
| N | 1210-031-103 | Pivot Tab | 2 |
| P | 0003-037-000 | Hex Hd. Cap Screw | 2 |
| R | 0004-183-000 | Button Hd. Screw | 2 |
| S | 0004-323-000 | Soc. Hd. Cap Screw | 2 |
| T | 0007-019-000 | Truss Hd. Screw | 2 |
| V | 0007-042-000 | Truss Hd. Screw | 4 |
| W | 0007-050-000 | Truss Hd. Screw | 2 |
| X | 0007-062-000 | Truss Hd. Screw | 2 |
| Y | 0013-018-000 | External Tooth Lockwasher | 2 |
| Z | 0015-003-000 | Hex Nut | 4 |
| AA | 0015-059-000 | Nylock Hex Nut | 2 |
| AB | 0016-036-000 | Nylock Hex Nut | 2 |
| AC | 0016-028-000 | Hex Nut | 4 |
| AD | 0016-090-000 | Nylock Hex Nut | 2 |
| AE | 0025-050-000 | Dome Head Rivet | 9 |
| AF | 0052-086-000 | Nyliner | 4 |
| AG | 0360-031-077 | Pneumatic Cylinder | 2 |
| AH | 1069-132-150 | Fowler Weldment | 1 |
| AJ | (page 72) | Head Piece Assembly | 1 |
| AK | 7900-001-102 | Velcro Pile | 2.5' |
| AL | 0011-063-000 | Washer | 4 |
| AM | 0011-179-000 | Washer | 4 |
| AN | 0011-180-000 | Washer | 2 |
| AP | 0014-087-000 | Washer | 2 |
| AR | 3001-300-099 | Modified Bushing | 2 |
| AS | 0038-436-000 | Extension Spring | 2 |
| AT | 1069-060-091 | Fowler Release Label, Right | 1 |
| AV | 1069-060-092 | Fowler Release Label, Left | 1 |


1069-133-020 Optional Dual Articulating Head Piece

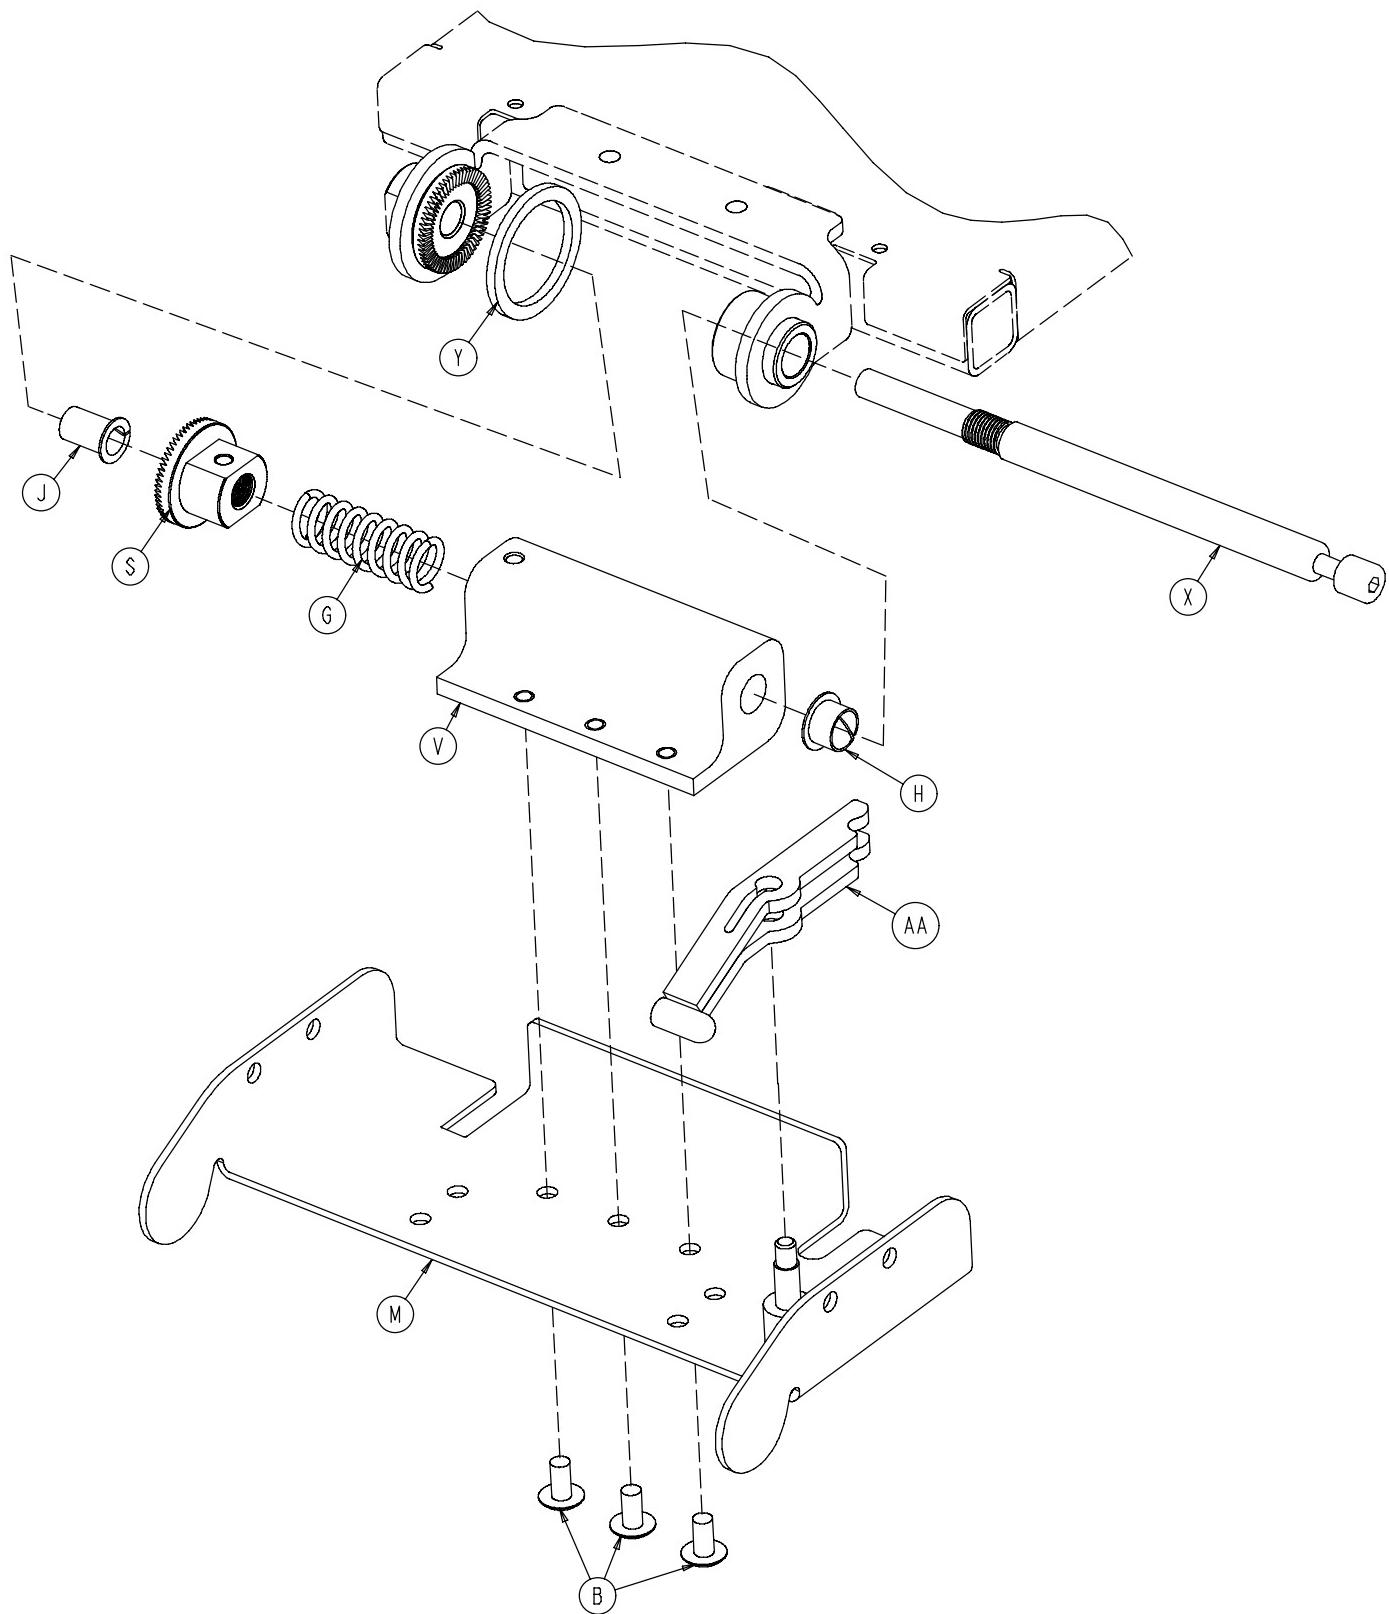

1069-133-020 Optional Dual Articulating Head Piece

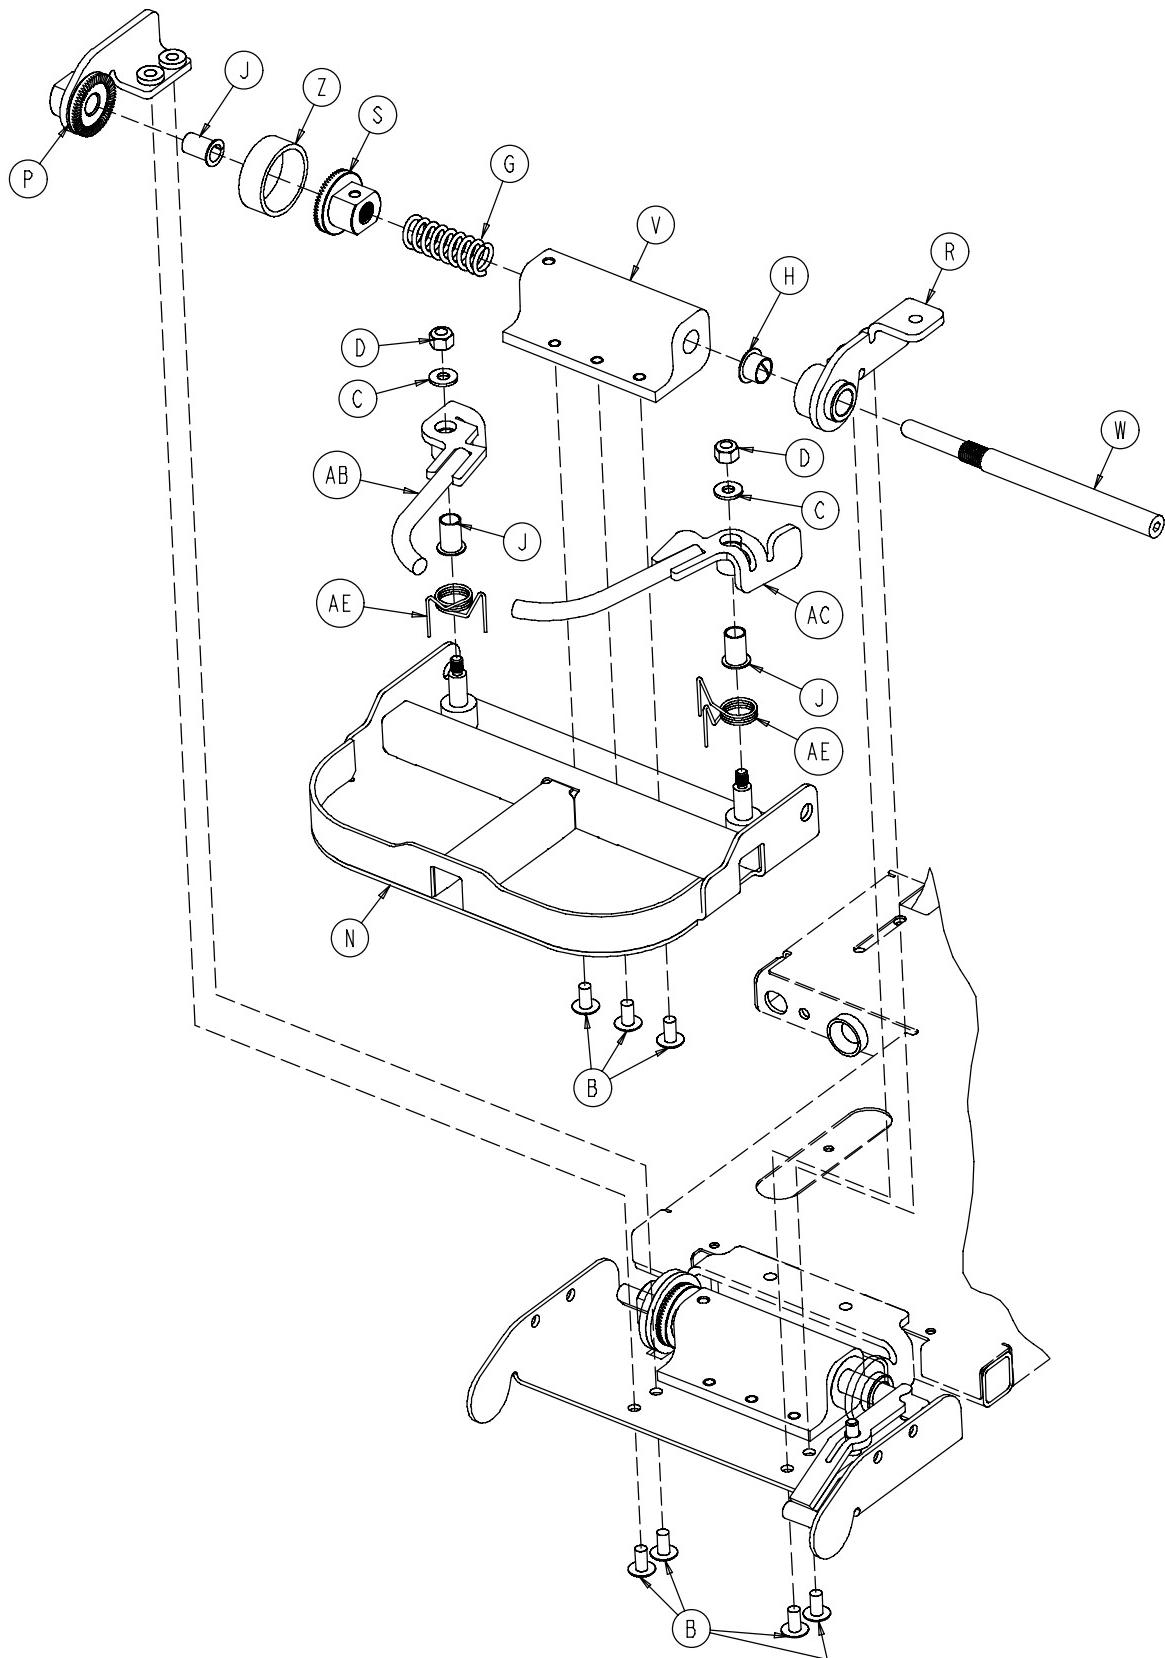


1069-133-020 Optional Dual Articulating Head Piece

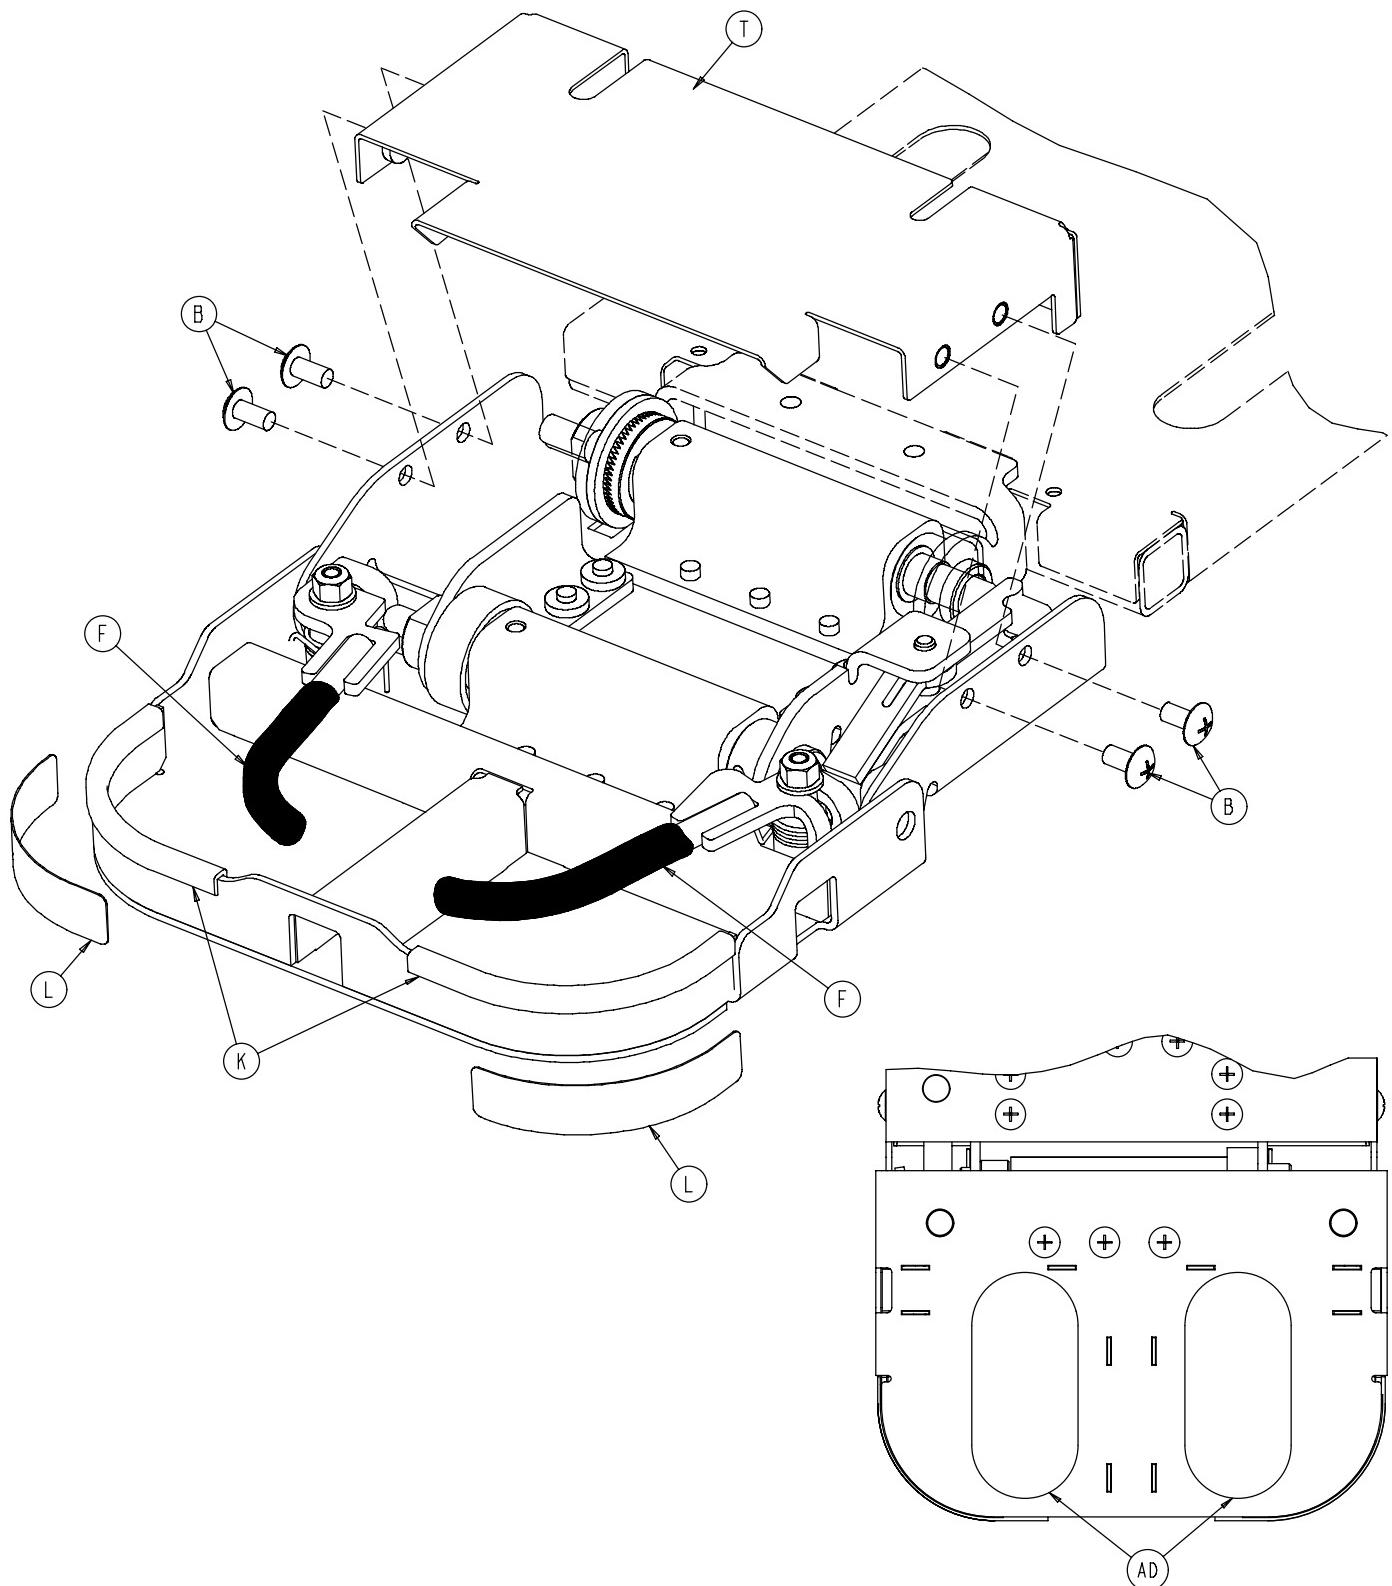


1069-133-020 Optional Dual Articulating Head Piece

| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------------|---------|
| B | 0007-080-000 | Truss Hd. Mach. Screw | 14 |
| C | 0011-304-000 | Washer | 2 |
| D | 0016-123-000 | Hex Nut | 2 |
| F | 0037-200-000 | Vinyl Cap | 2 |
| G | 0038-474-000 | Compression Spring | 2 |
| H | 0052-086-000 | Nyliner | 2 |
| J | 0052-815-000 | Nyliner | 4 |
| K | 0058-056-000 | Edge Trim | 2 |
| L | 1068-091-021 | 40 Pounds Max. Label | 2 |
| M | 1069-133-030 | Neck Weldment | 1 |
| N | 1069-133-040 | Head Weldment | 1 |
| P | 1069-133-057 | Head Bracket Weldment, Rt. | 1 |
| R | 1069-133-058 | Head Bracket Weldment, Lt. | 1 |
| S | 1069-133-073 | Shaft Gear | 2 |
| T | 1069-133-075 | Head Piece Cover | 1 |
| V | 1069-133-076 | Gear Housing | 2 |
| W | 1069-133-083 | Head Shaft | 1 |
| X | 1069-133-084 | Neck Shaft | 1 |
| Y | 1069-133-085 | Neck Spacer | 1 |
| Z | 1069-133-088 | Head Spacer | 1 |
| AA | 1069-133-100 | Link Weldment | 1 |
| AB | 1069-133-110 | Handle Weldment, Right | 1 |
| AC | 1069-133-115 | Handle Weldment, Left | 1 |
| AD | 7900-001-102 | 4.25" Velcro Pile | .71 Ft. |
| AE | 1069-133-121 | Handle Torsion Spring | 2 |

1069-042-160 Zero Articulating Crank Fowler

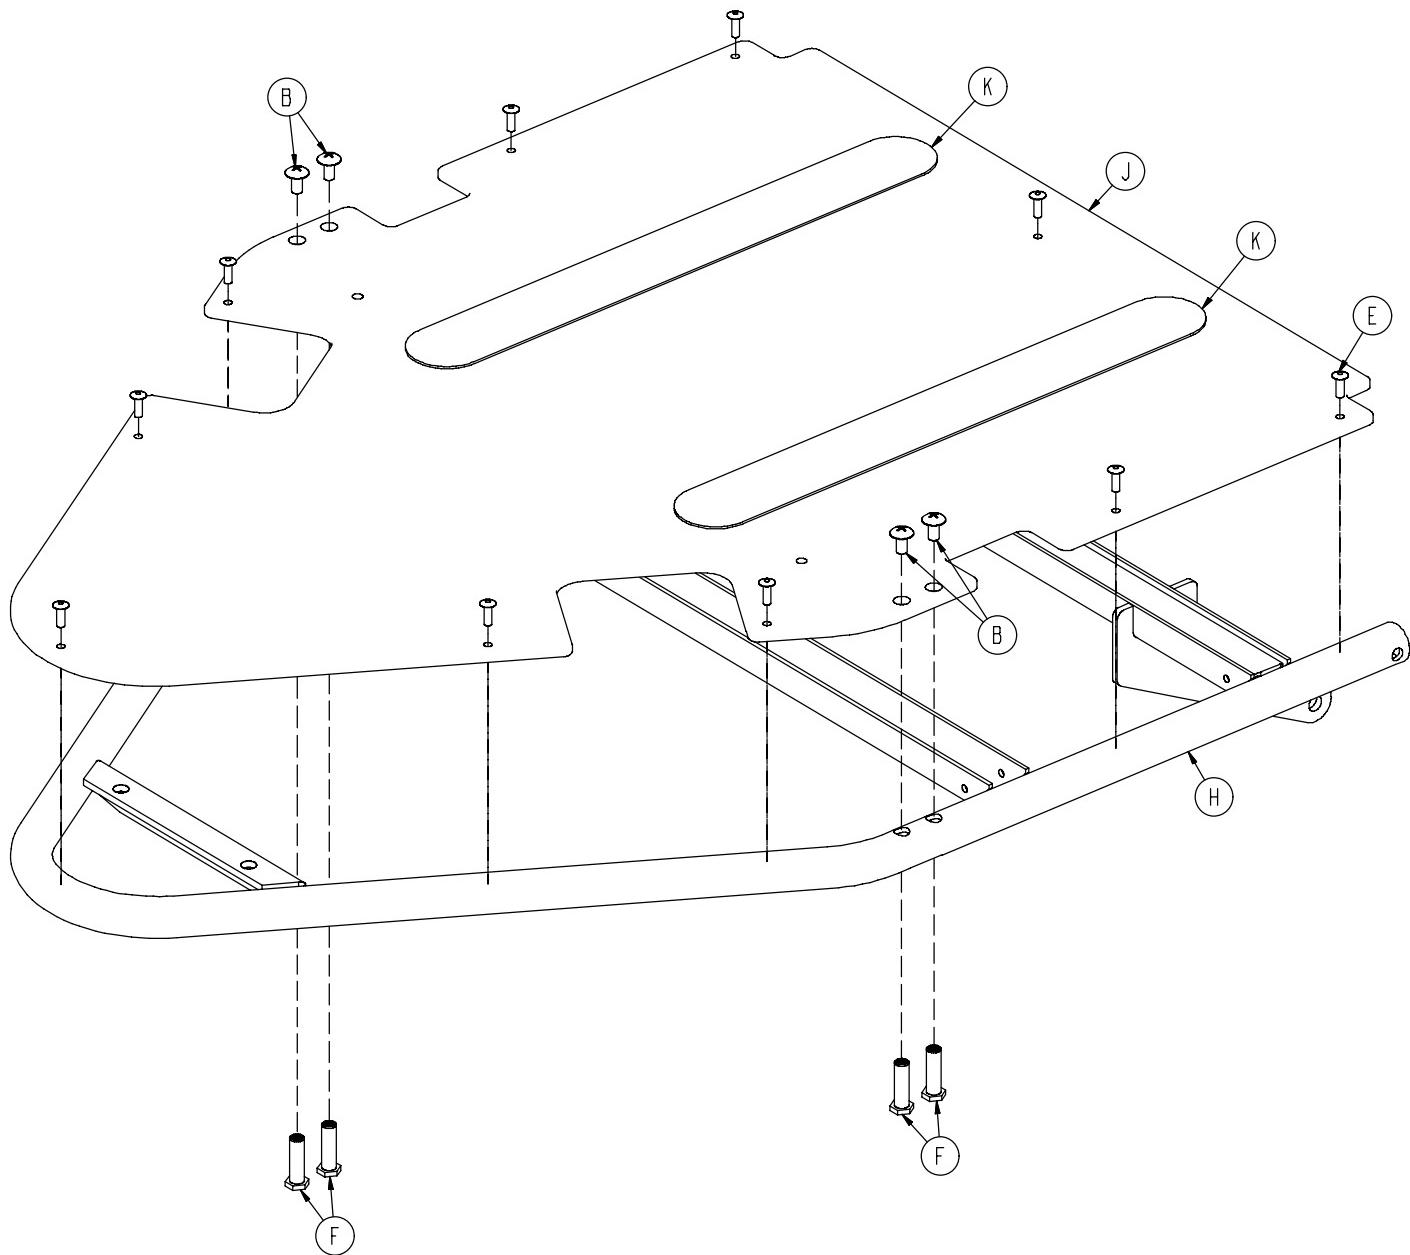


1069-042-160 Zero Articulating Crank Fowler

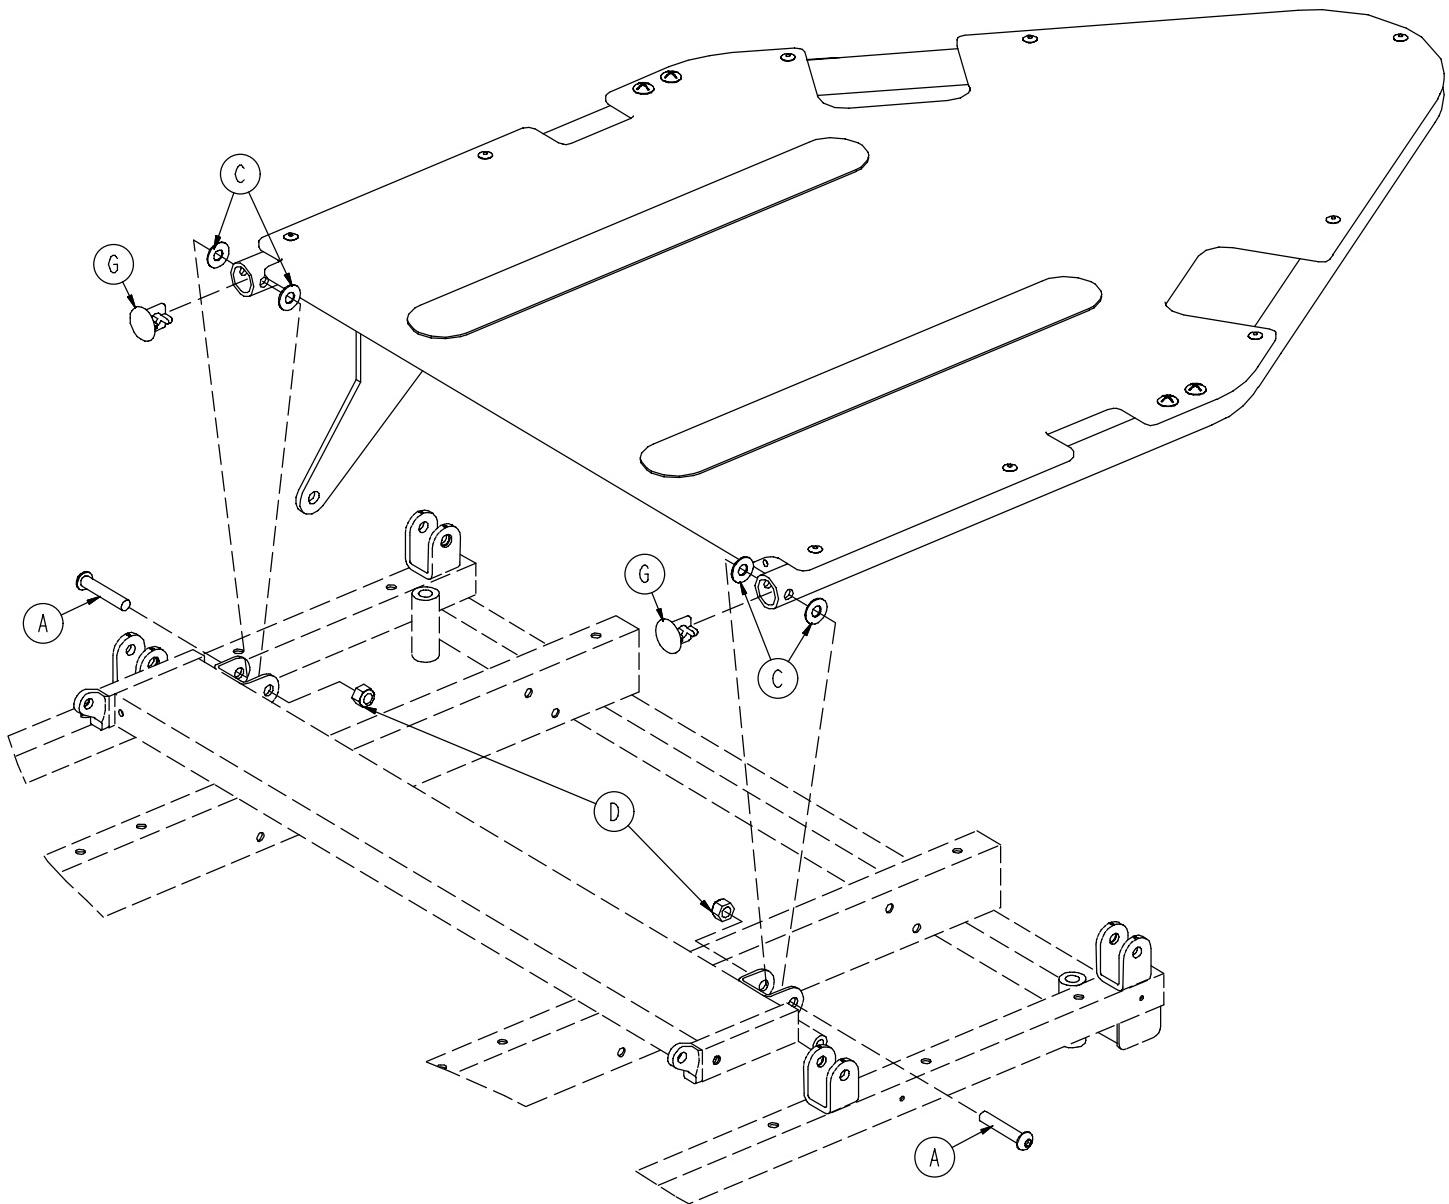


| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 0004-054-000 | Button Hd. Cap Screw | 2 |
| B | 0007-042-000 | Truss Hd. Mach. Screw | 4 |
| C | 0011-179-000 | Washer | 4 |
| D | 0016-036-000 | Nylock Nut | 2 |
| E | 0025-050-000 | Rivet | 10 |
| F | 1069-031-012 | Barrel Nut | 4 |
| G | 1069-031-013 | 1" Hole Plug | 2 |
| H | 1069-032-160 | Fowler Weldment | 1 |
| J | 1069-032-065 | Fowler Skin | 1 |
| K | 7900-001-102 | Velcro Pile | 2 |

1069-042-155 Single Articulating Crank Fowler

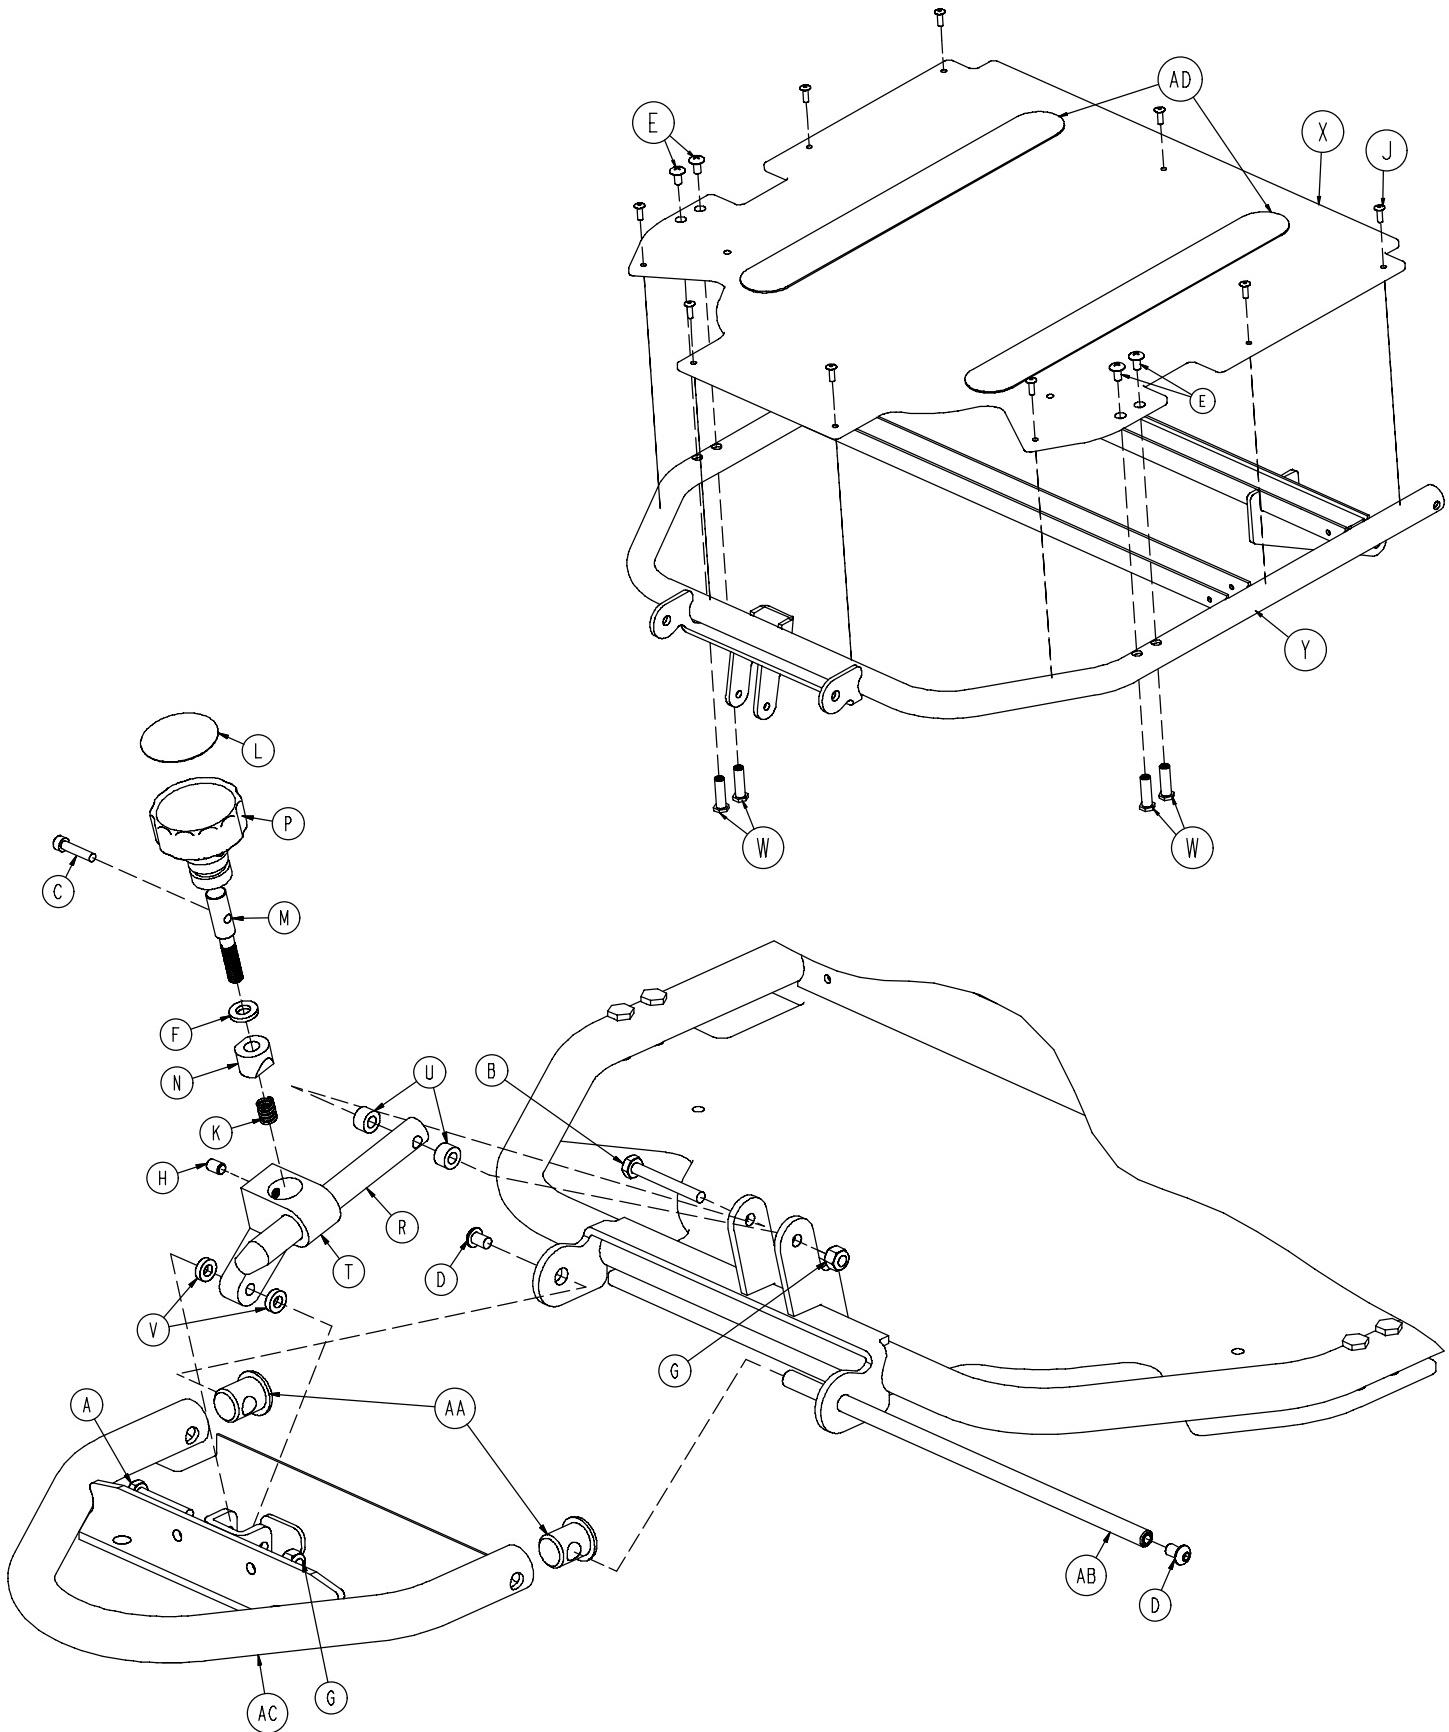


1069-042-155 Single Articulating Crank Fowler

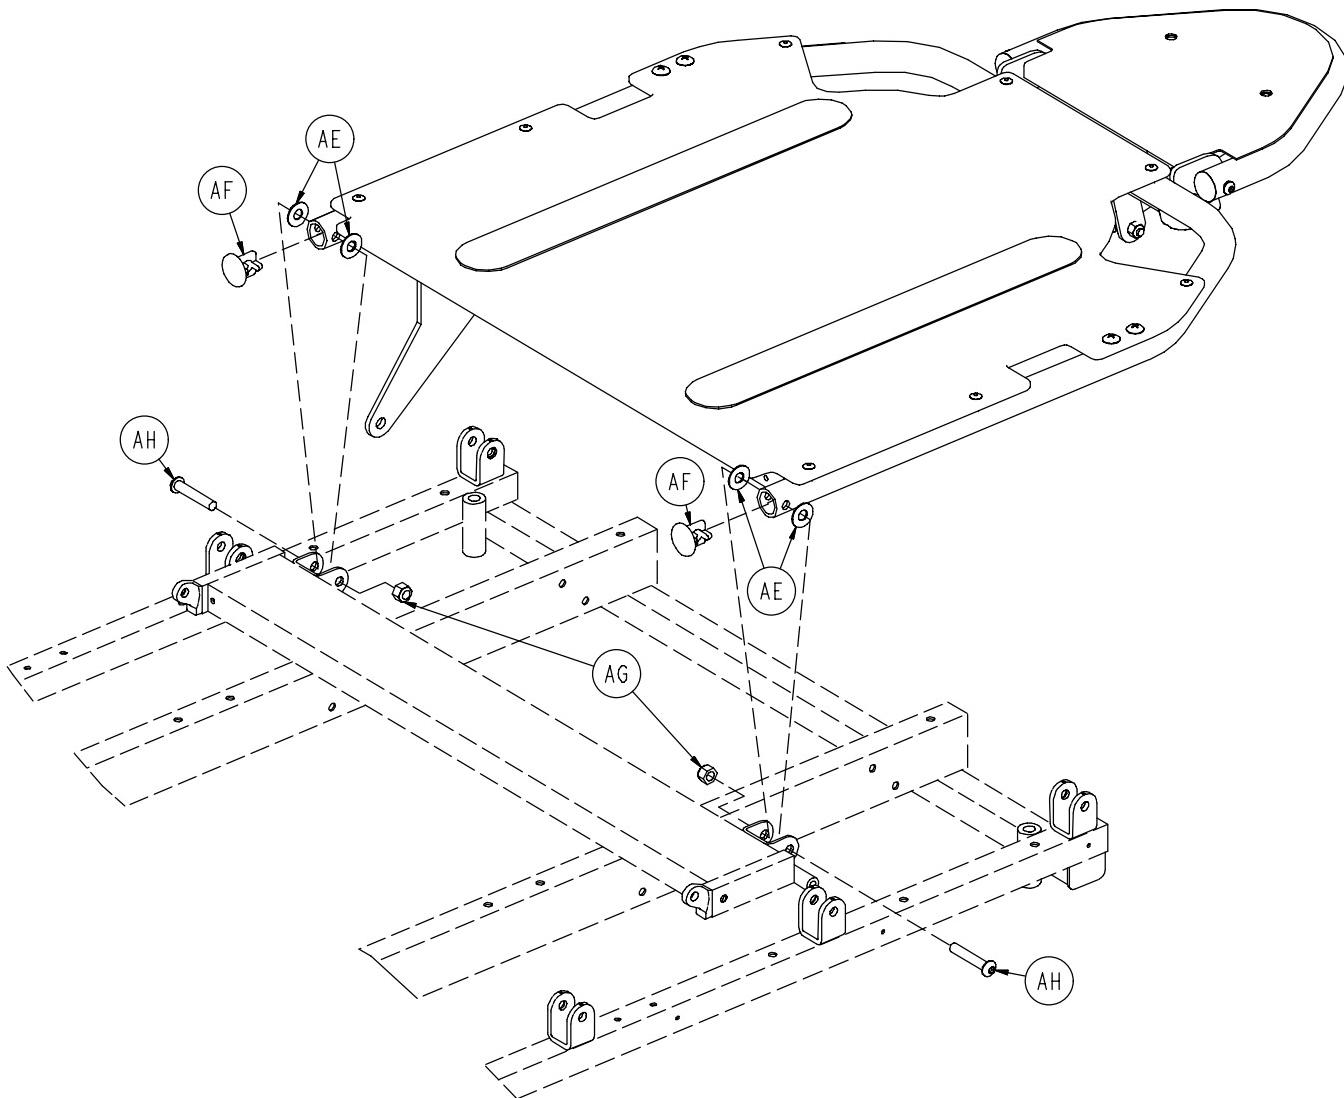

| Item | Part No. | Part Name | Qty. | Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------|------|------|--------------|---------------------|------|
| A | 0003-078-000 | Hex Hd. Cap Screw | 1 | T | 0966-070-027 | Bar Clamp | 1 |
| B | 0003-076-000 | Hex Hd. Cap Screw | 1 | U | 0966-070-036 | Spacer | 2 |
| C | 0004-066-000 | Soc. Hd. Cap Screw | 1 | V | 0966-070-037 | Spacer | 2 |
| D | 0004-074-000 | Button Hd. Screw | 2 | W | 1069-031-012 | Barrel Nut | 4 |
| E | 0007-042-000 | Truss Hd. Screw | 4 | X | 1069-032-075 | Fowler Skin | 1 |
| F | 0011-108-000 | Steel Flat Washer | 1 | Y | 1069-032-170 | Fowler Weldment | 1 |
| G | 0016-028-000 | Nylock Nut | 2 | AA | 1069-033-107 | Hole Plug | 2 |
| H | 0021-073-000 | Set Screw | 1 | AB | 1069-033-108 | Head Pivot Shaft | 1 |
| J | 0025-050-000 | Pop Rivet | 9 | AC | 1069-033-110 | Head Piece Weldment | 1 |
| K | 0038-171-000 | Compression Spring | 1 | AD | 7900-001-102 | Velcro Pile | 2 |
| L | 0966-001-065 | Label | 1 | AE | 0011-179-000 | Nylon Washer | 4 |
| M | 0966-051-018 | Shaft | 1 | AF | 1069-031-013 | Hole Plug | 2 |
| N | 0966-051-019 | Modified Wedge Lock | 1 | AG | 0016-036-000 | Nylock Nut | 2 |
| P | 0966-051-024 | Knob | 1 | AH | 0004-054-000 | Button Hd. Screw | 2 |
| R | 0966-070-025 | Slide Bar | 1 | | | | |

1069-142-150 Dual Articulating Crank Fowler

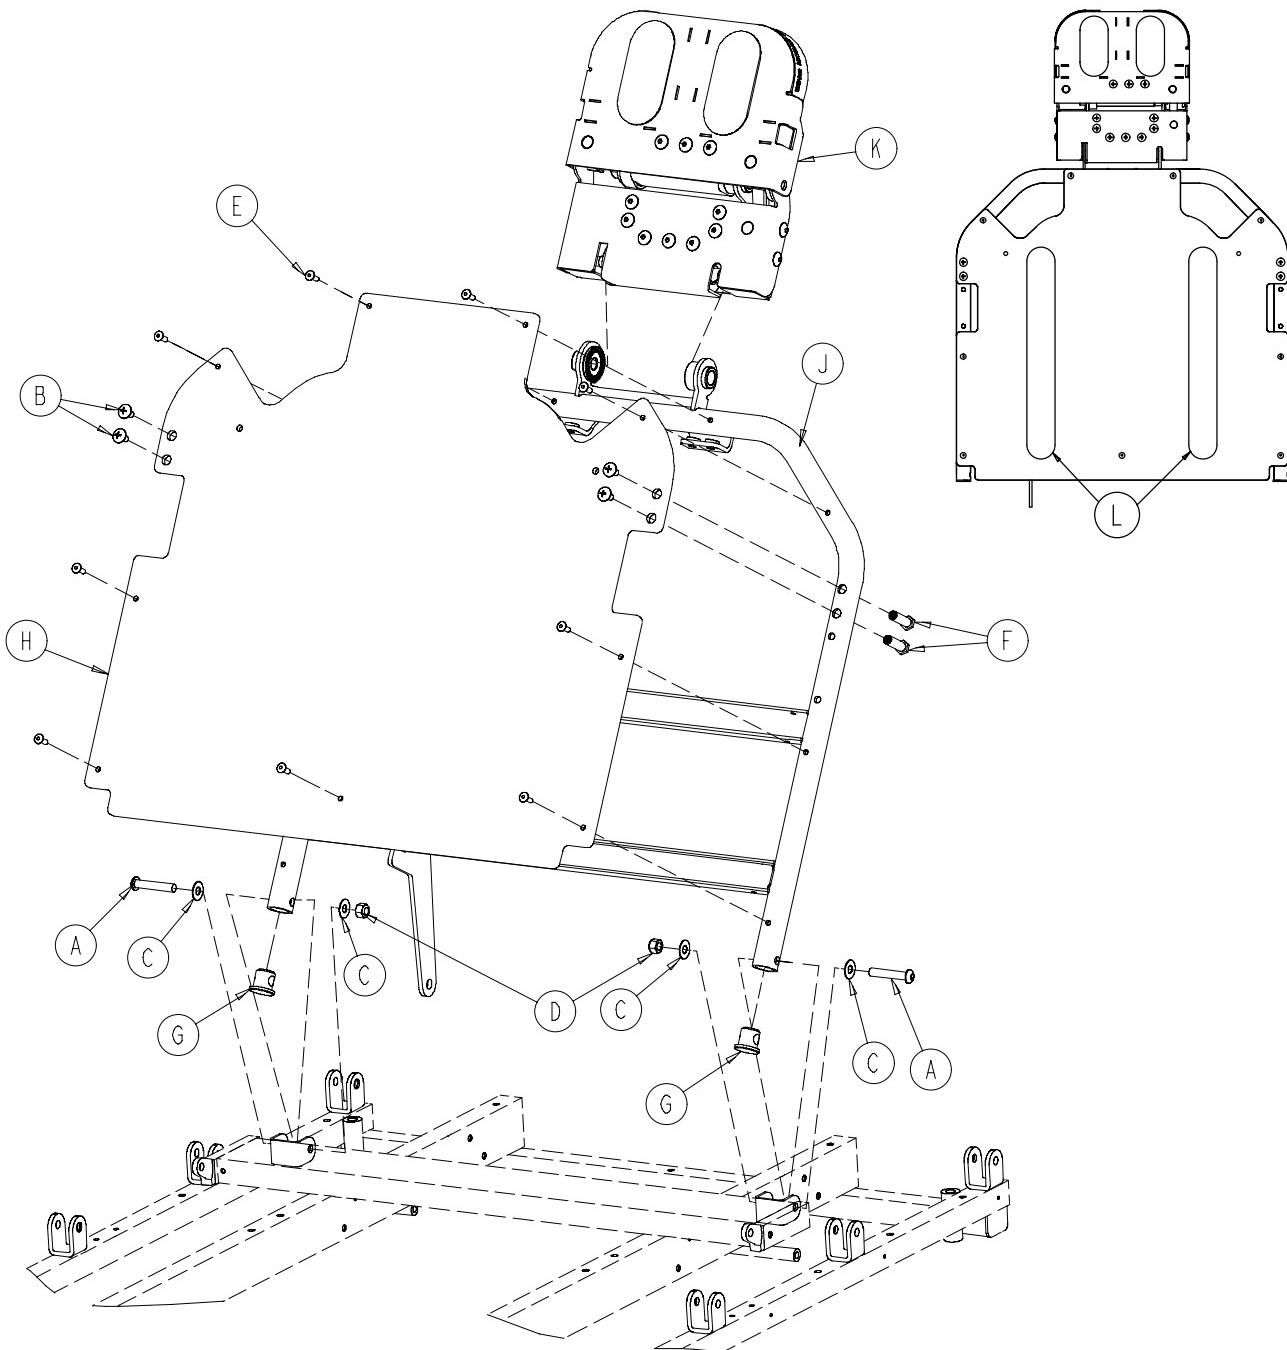


1069-142-150 Dual Articulating Crank Fowler

| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------|---------|
| A | 0004-054-000 | Button Hd. Screw | 2 |
| B | 0007-042-000 | Truss Hd. Screw | 4 |
| C | 0011-179-000 | Washer | 4 |
| D | 0016-036-000 | Nylock Nut | 2 |
| E | 0025-050-000 | Pop Rivet | 9 |
| F | 1069-031-012 | Barrel Nut | 4 |
| G | 1069-031-013 | Hole Plug | 2 |
| H | 1069-032-055 | Fowler Skin | 1 |
| J | 1069-132-150 | Fowler Weldment | 1 |
| K | (page 72) | Head Piece Assembly | 1 |
| L | 7900-001-102 | Velcro Pile | 2.5 ft. |


Crank Fowler Assembly

Assembly part number 1069-042-020 (reference only)

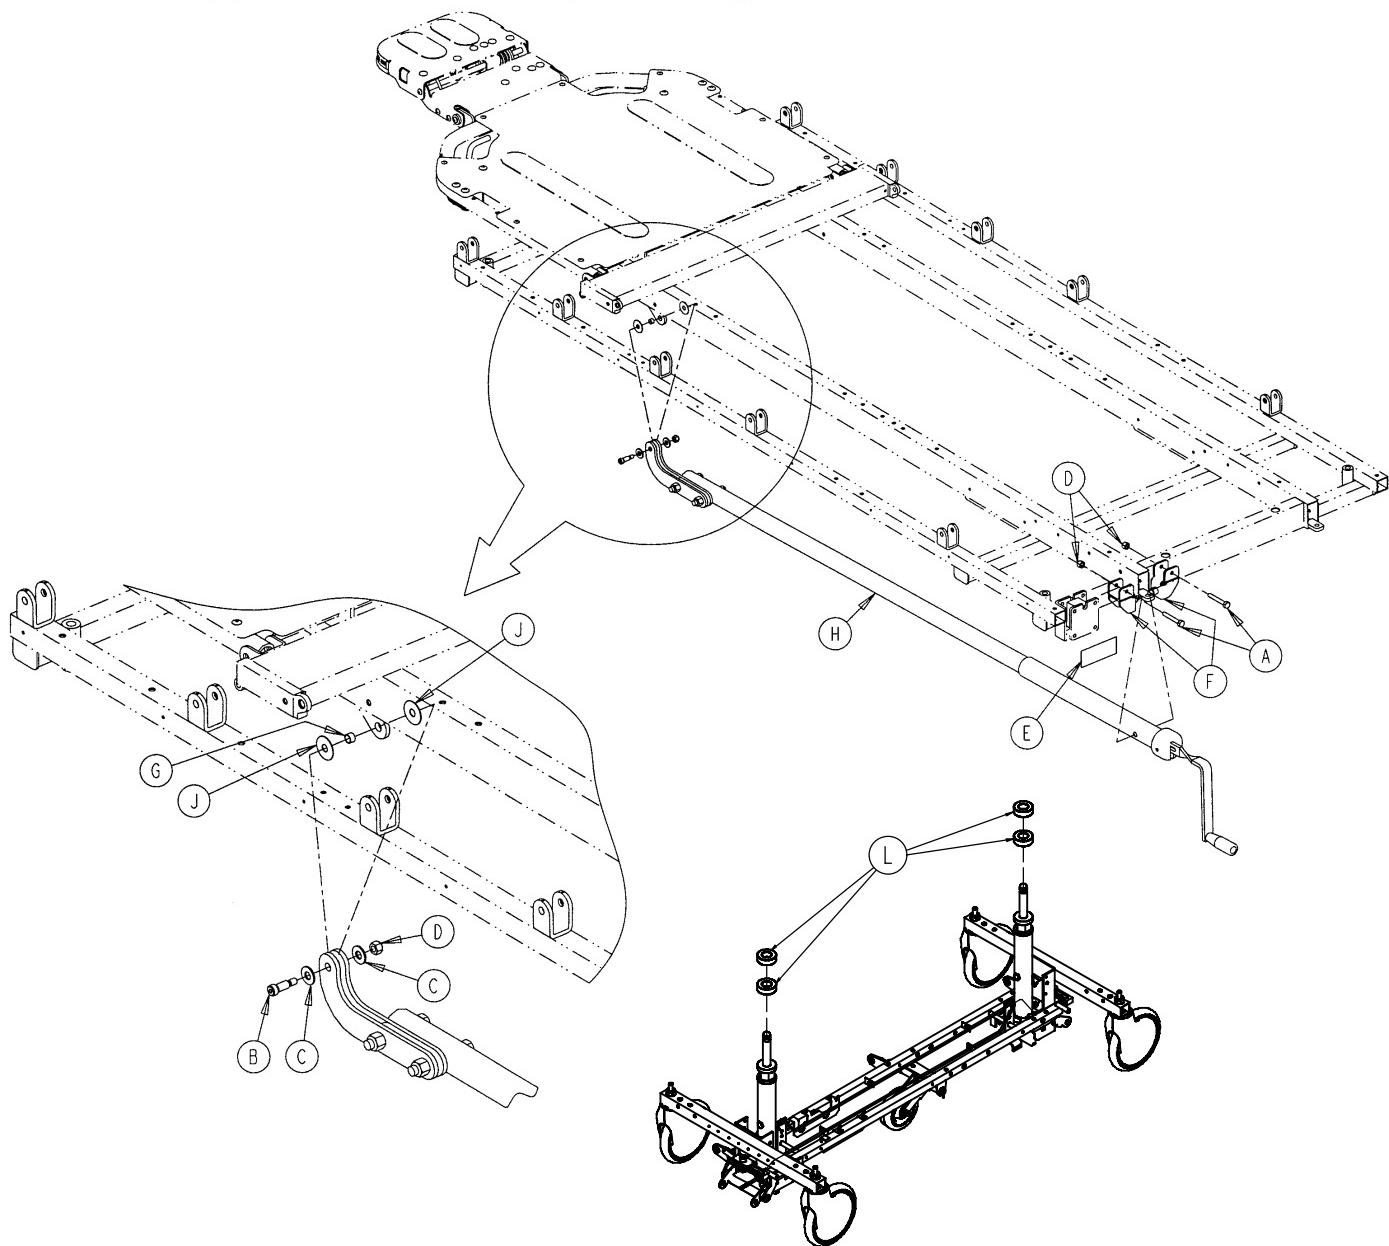


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 0003-078-000 | Hex Hd. Cap Screw | 2 |
| B | 0008-027-000 | Shoulder Bolt | 1 |
| C | 0011-003-000 | Flat Washer | 2 |
| D | 0016-028-000 | Nylock Nut | 3 |
| E | 0946-001-064 | Fowler Symbol Label | 1 |
| F | 1010-034-015 | Mounting Bracket Ass'y | 2 |
| G | 1066-033-068 | Sleeve | 1 |
| H | (page 83) | CrankscREW Assembly | 1 |
| J | 0014-019-000 | Nylon Flat Washer | 2 |
| L | 1040-010-027 | Spacer | 4 |

1069-042-010 Fowler Crankscrew Assembly

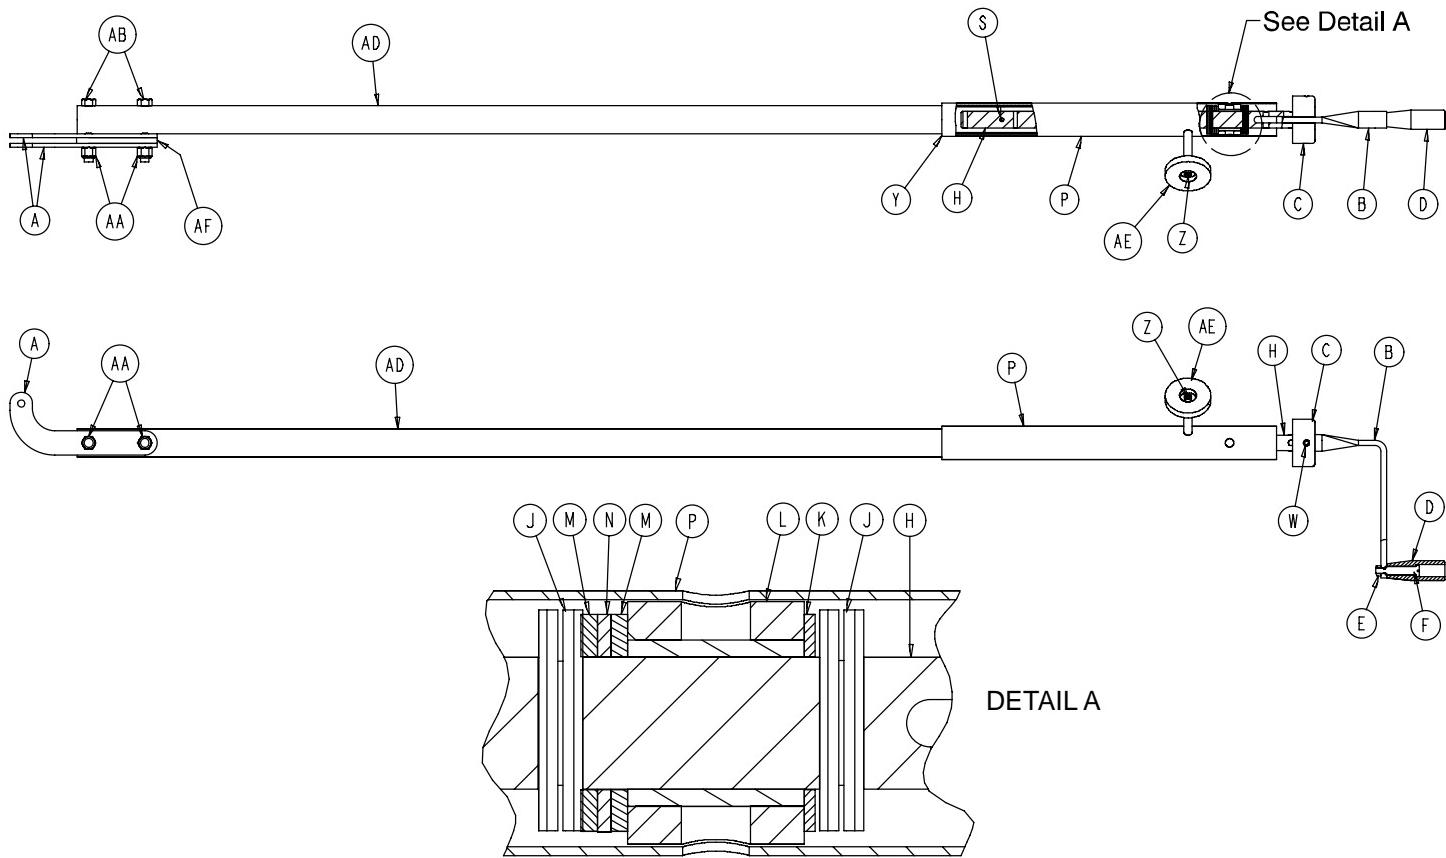

| Item | Part No. | Part Name | Qty. |
|------|---------------|----------------------|------|
| A | 1069-042-023 | Crank Arm Link | 2 |
| B | 1550-001-016 | Crank Handle | 1 |
| C | 0946-033-018 | Crank Disc | 1 |
| D | 0938-001-177 | Knob | 1 |
| E | 0016-005-000 | Conelock Nut | 1 |
| F | 0378-024-029 | Shoulder Bolt | 1 |
| H | 0946-033-035 | Fowler Screw | 1 |
| J | 0026-014-000 | Roll Pin | 2 |
| K | 0081-174-000 | Thrust Washer | 1 |
| L | 0938-001-175 | Bearing Assembly | 1 |
| M | 0081-176-000 | Thrust Washer | 2 |
| N | 0081-175-000 | Thrust Washer | 1 |
| P | 1510-034-084 | Screw Cover Assembly | 1 |
| S | 0026-010-000 | Roll Pin | 1 |
| W | 0026-045-000 | Roll Pin | 1 |
| Y | 7900-001-102 | Velcro Pile Tape | 4" |
| Z | 0004-007-000 | Soc. Hd. Cap Screw | 1 |
| AA | 0016-035 -000 | Nylon Hex Nut | 2 |
| AB | 0003-027-000 | Hex Hd. Cap Screw | 2 |
| AD | 1069-042-021 | Drive Tube Assembly | 1 |
| AE | 1550-001-014 | Magnet | 1 |
| AF | 1069-042-024 | Crank Spacer | 1 |

Stationary Foot Section Assembly

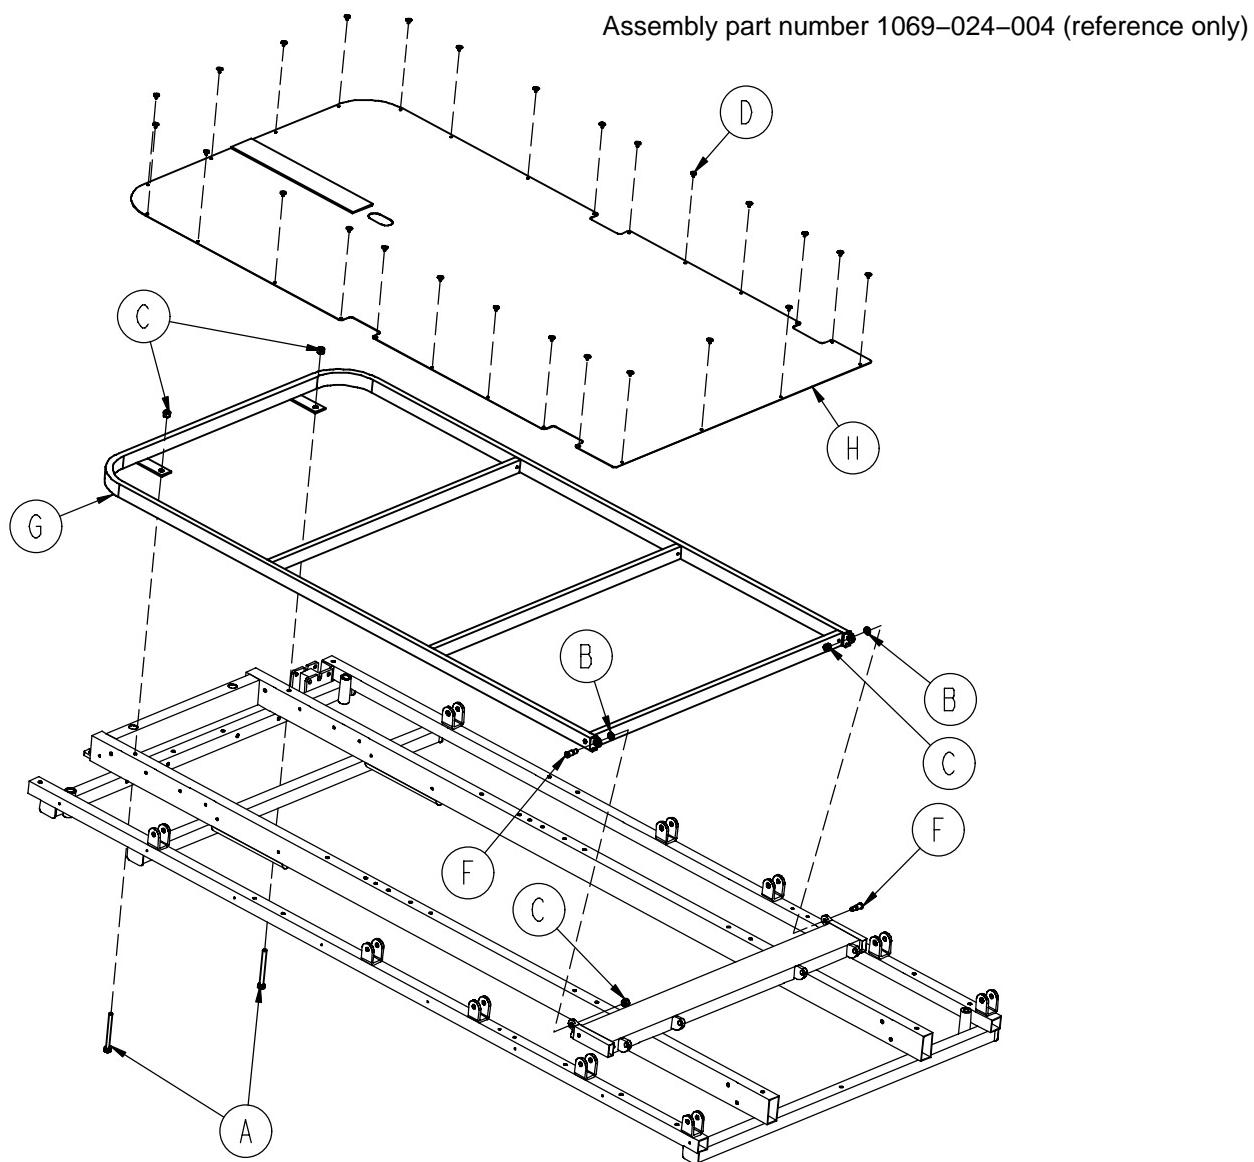


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0003-073-000 | Hex Hd. Cap Screw | 2 |
| B | 0014-003-000 | Washer | 2 |
| C | 0016-028-000 | Hex Nut | 4 |
| D | 0025-101-000 | Rivet | 26 |
| F | 1010-032-060 | Pivot Bolt | 2 |
| G | 1068-044-050 | Stationary Foot Weldment | 1 |
| H | 1069-019-001 | Foot Section Skin | 1 |
| J | 7900-001-102 | Velcro Pile | 1 |


Notes

Knee Gatch Assembly

Assembly part number 1068-040-110
(reference only)

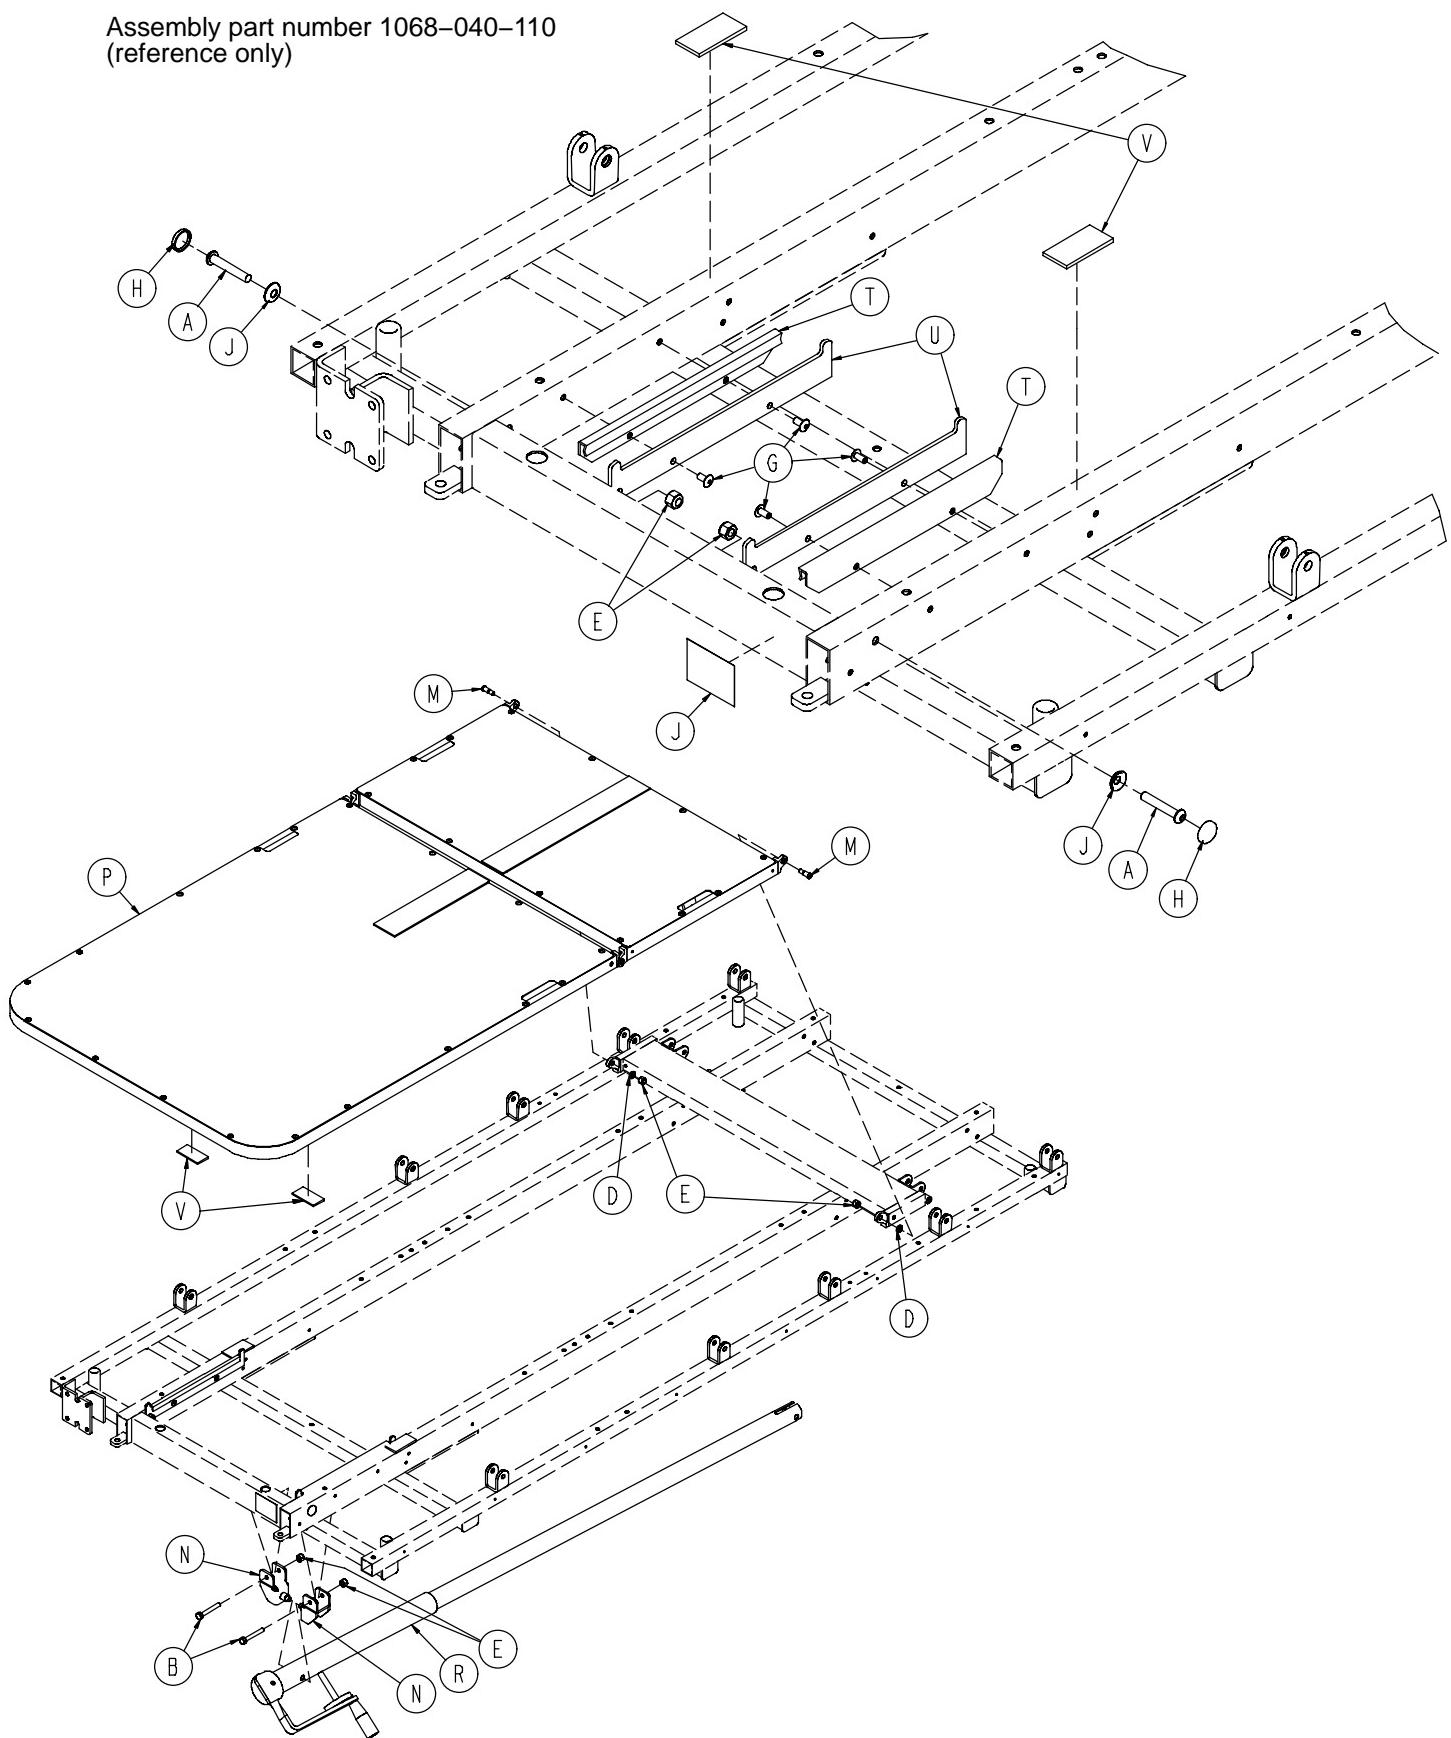


Knee Gatch Assembly

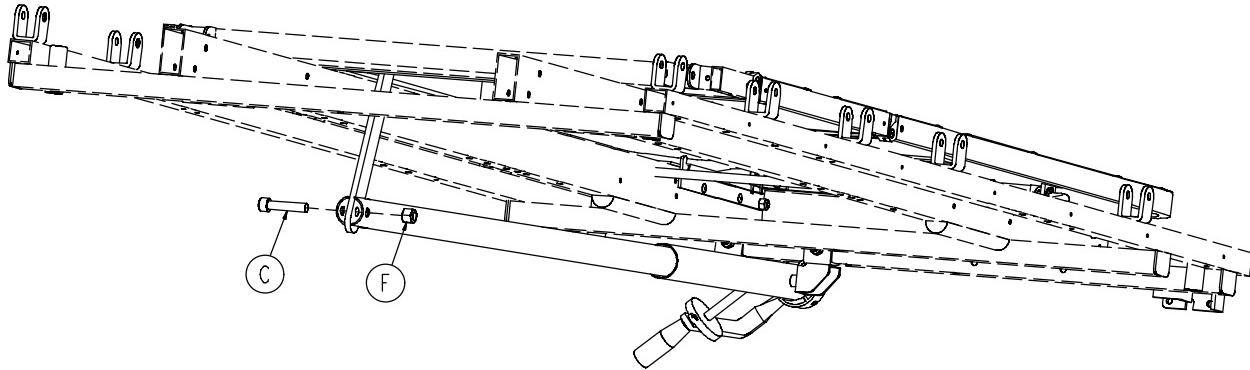



| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|---------|
| A | 0004-135-000 | Button Hd. Cap Screw | 10 |
| B | 0003-078-000 | Hex Hd. Cap Screw | 2 |
| C | 0004-105-000 | Socket Hd. Cap Screw | 1 |
| D | 0014-003-000 | Washer | 2 |
| E | 0016-028-000 | Hex Nut | 6 |
| F | 0016-035-000 | Nylock Hex Nut | 1 |
| G | 0025-079-000 | Dome Hd. Rivet | 4 |
| H | 0037-055-000 | Protective Cap | 2 |
| J | 0037-056-000 | Retaining Washer | 2 |
| K | 0721-031-065 | Hole Plug | 2 |
| L | 0946-001-065 | Knee Gatch Label | 1 |
| M | 1010-032-060 | Pivot Bolt | 2 |
| N | 1010-034-015 | Mounting Bracket | 2 |
| P | (page 88) | Foot/Thigh Subassembly | 1 |
| R | (page 89) | Gatch Crankscrew Assembly | 1 |
| T | 1510-034-190 | Slider Pad | 2 |
| U | 1510-034-194 | Calf Stand Rest | 2 |
| V | 7900-001-102 | Velcro Pile | .33 ft. |

1068-041-010 Knee Gatch Foot and Thigh Section

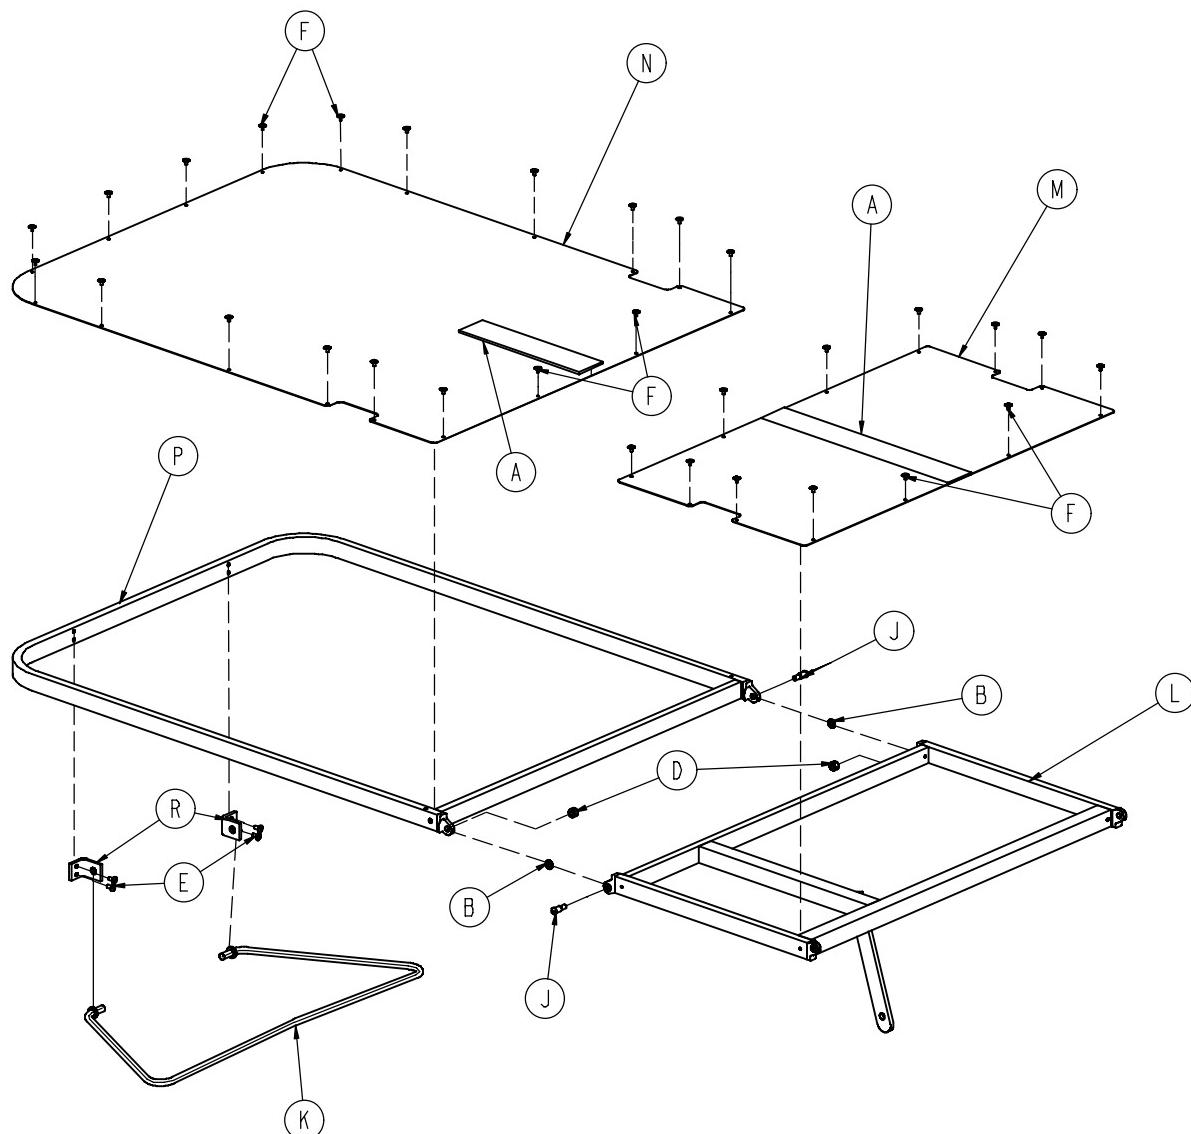

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|-------|
| A | 7900-001-102 | Velcro Adhesive Pile | 1.92' |
| B | 0014-003-000 | Washer | 2 |
| D | 0016-028-000 | Nylock Hex Nut | 2 |
| E | 0025-079-000 | Rivet | 4 |
| F | 0025-101-000 | Rivet | 30 |
| J | 1010-032-060 | Pivot Bolt | 2 |
| K | 1710-034-127 | Calf Stand Bar | 1 |
| L | 1010-034-025 | Thigh Section Weldment | 1 |
| M | 1066-034-059 | Thigh Section Skin | 1 |
| N | 1068-040-044 | Calf Section Skin | 1 |
| P | 1068-040-050 | Calf Section Weldment | 1 |
| R | 1510-034-088 | Calf Stand Bracket | 2 |


1068-046-010 Knee Gatch Crankscrew Assembly

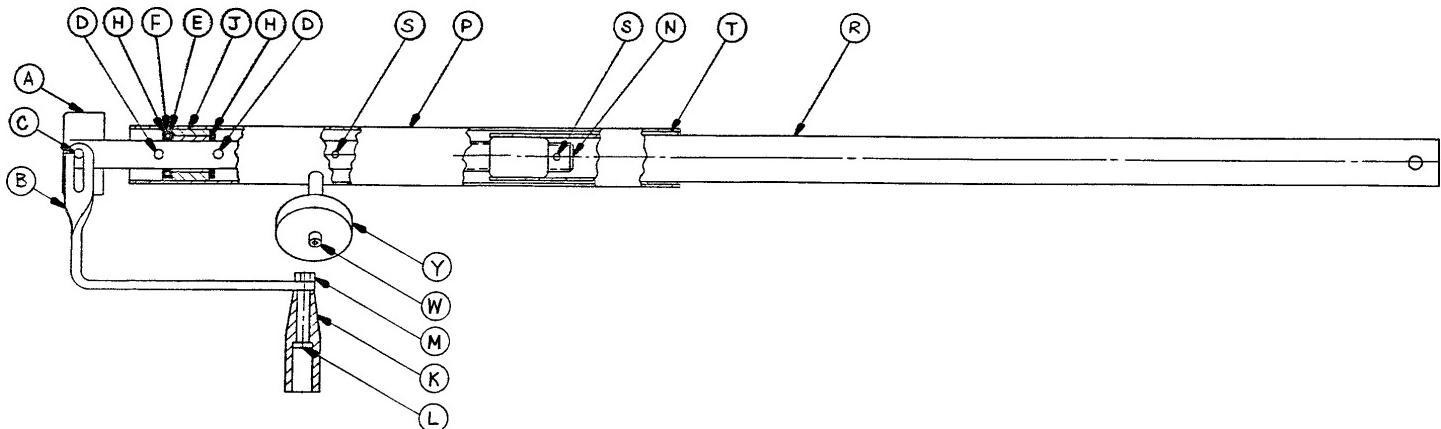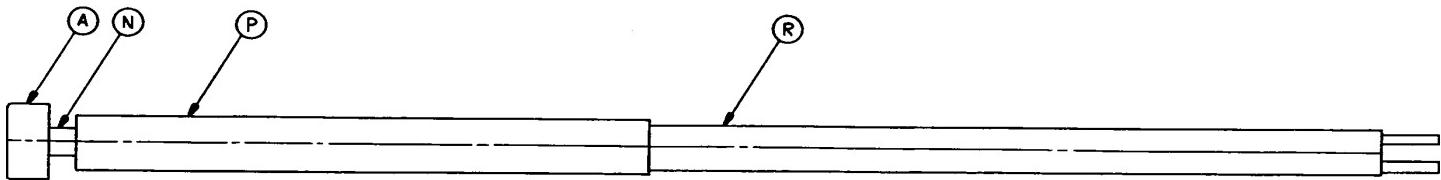

| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|------|
| A | 0946-033-018 | Crank Disk | 1 |
| B | 1550-001-016 | Crank Handle | 1 |
| C | 0026-045-000 | Roll Pin | 1 |
| D | 0026-014-000 | Roll Pin | 2 |
| E | 0081-176-000 | Thrust Washer | 1 |
| F | 0081-175-000 | Thrust Bearing | 1 |
| H | 0081-174-000 | Thrust Washer | 2 |
| J | 0938-001-175 | Bearing Assembly | 1 |
| K | 0938-001-177 | Knob | 1 |
| L | 0378-024-029 | Shoulder Bolt | 1 |
| M | 0016-005-000 | Conelock Nut | 1 |
| N | 0946-034-025 | Knee Gatch Screw | 1 |
| P | 1510-034-084 | Screw Cover Assembly | 1 |
| R | 1068-046-012 | Gatch Drive Tube Assembly | 1 |
| S | 0026-010-000 | Roll Pin | 2 |
| T | 7900-001-102 | Velcro Pile Tape | .3' |
| W | 0004-007-000 | Soc. Head Cap Screw | 1 |
| Y | 1550-001-014 | Magnet | 1 |

Siderail to Litter Assembly, Two-Position Siderails


Assembly part number 1068-020-010 (reference only)

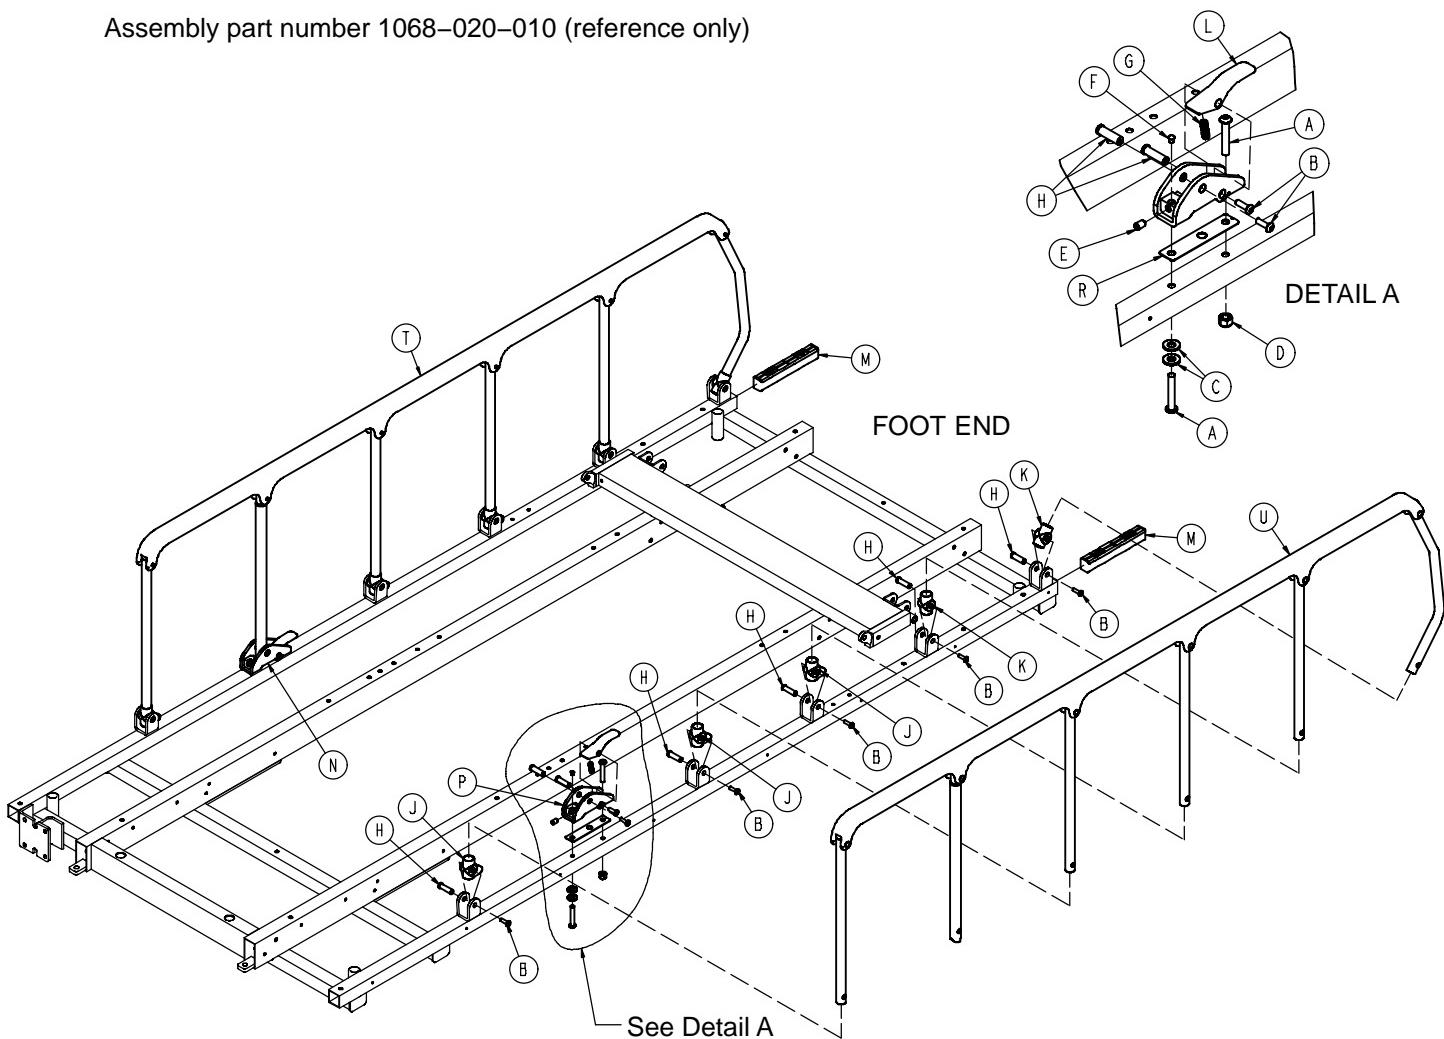

| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0004-135-000 | Button Hd. Cap Screw | 4 |
| B | 0004-515-000 | Button Hd. Cap Screw | 14 |
| C | 0011-002-000 | Flat Washer | 4 |
| D | 0016-028-000 | Nylock Hex Nut | 2 |
| E | 0021-104-000 | Set Screw | 2 |
| F | 0037-074-000 | Hole Plug | 2 |
| G | 0038-220-000 | Compression Spring | 2 |
| H | 0721-026-066 | Pivot Screw | 14 |
| J | 0721-026-068 | Upright Cradle | 6 |
| K | 0721-026-069 | Upright Sleeve | 4 |
| L | 0721-026-074 | Lock Handle | 2 |
| M | 1010-026-069 | Lock Support | 2 |
| N | 1010-026-080 | Lock Housing, Left | 1 |
| P | 1010-026-081 | Lock Housing, Right | 1 |
| R | 1010-026-103 | Spring Retainer | 2 |
| T | (page 91) | Siderail Assembly, Right | 1 |
| U | (page 91) | Siderail Assembly, Left | 1 |

Two-Position Siderail Assembly, Right and Left


Assembly part numbers
1068-020-015 (Right)
1068-020-017 (Left)

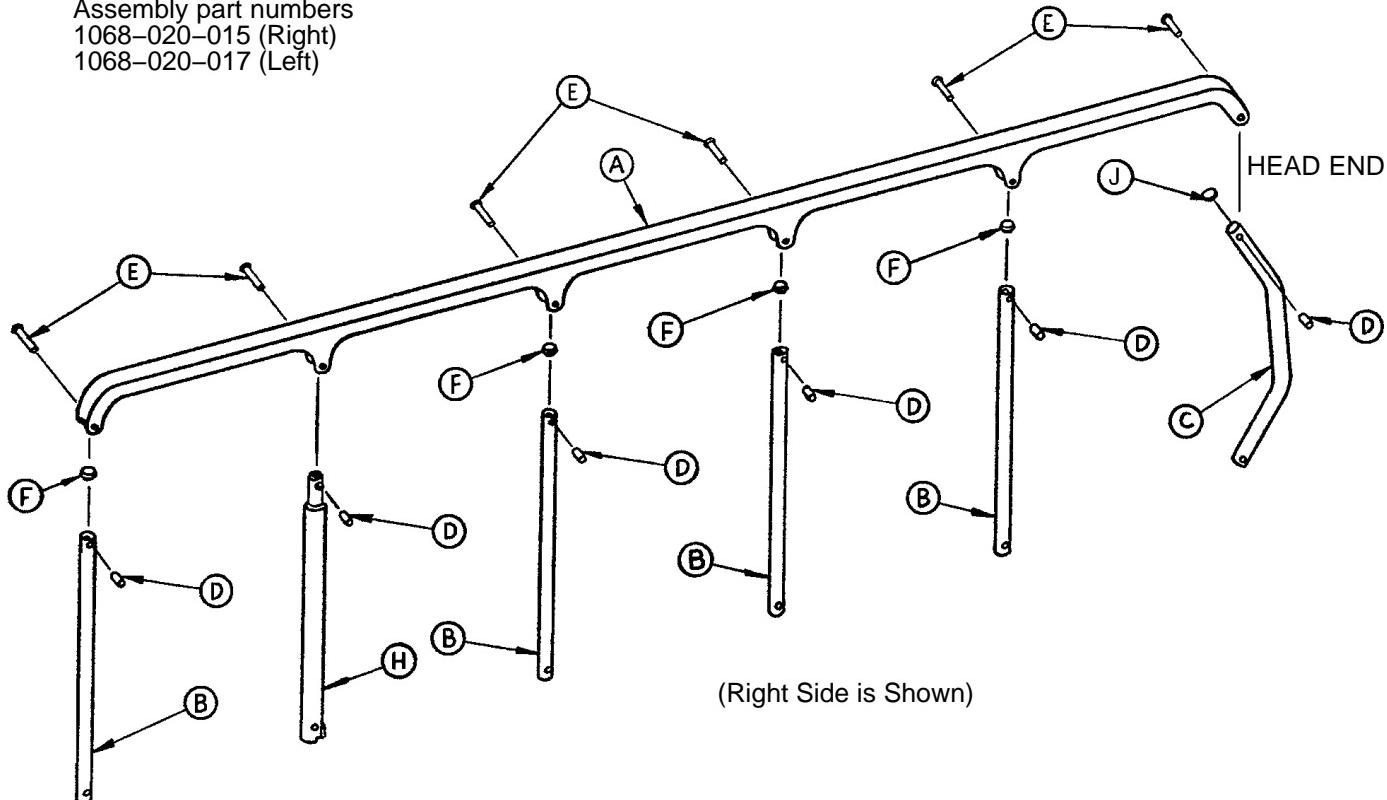

| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------|------|
| A | 1010-026-015 | Top Rail | 1 |
| B | 1010-026-083 | Upright | 4 |
| C | 1010-026-084 | Upright, Bent | 1 |
| D | 1010-026-082 | Sleeve, Bearing | 6 |
| E | 0025-106-000 | Semi-Tubular Rivet | 6 |
| F | 1010-026-010 | Round Hole Plug | 4 |
| H | 1010-026-085 | Latch Upright Ass'y | 1 |
| J | 1010-026-012 | Bent Spindle Rest | 1 |

Siderail to Litter Ass'y, Optional 3-Position Siderail


Assembly part number 1068-021-010 (reference only)

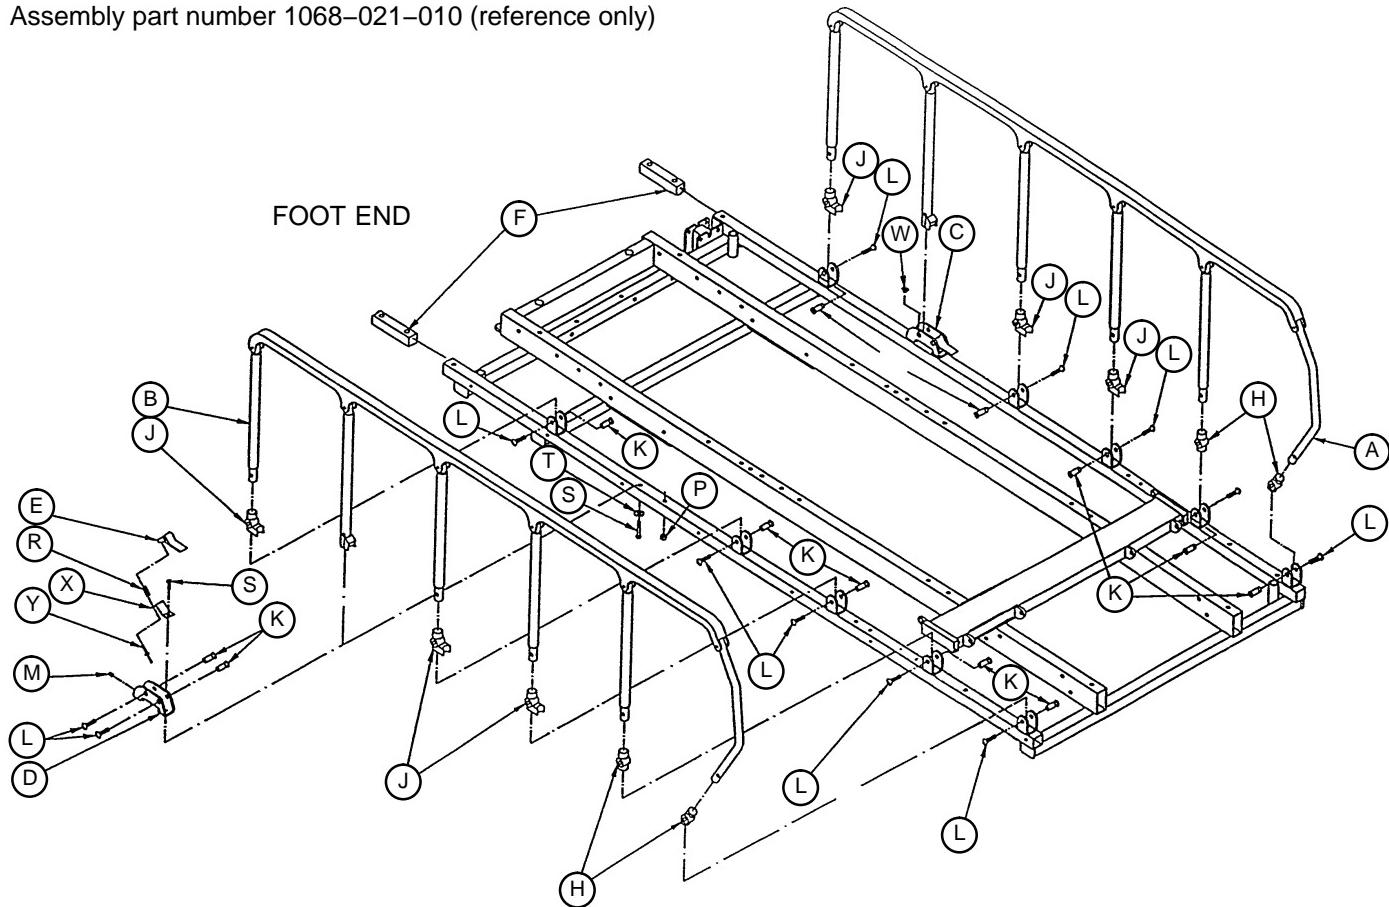

| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | (page 93) | Siderail Assembly, Right | 1 |
| B | (page 93) | Siderail Assembly, Left | 1 |
| C | 1066-026-018 | Lock Housing, Right | 1 |
| D | 1066-026-016 | Lock Housing, Left | 1 |
| E | 1066-026-022 | Lock Handle | 2 |
| F | 1010-026-069 | Lock Support | 2 |
| H | 0721-026-069 | Sleeve Upright | 4 |
| J | 0721-026-068 | Cradle Upright | 6 |
| K | 0721-026-066 | Pivot Screw | 14 |
| L | 0004-515-000 | Button Hd. Cap Screw | 14 |
| M | 0021-104-000 | Set Screw | 2 |
| P | 0016-028-000 | Nylock Hex Nut | 2 |
| R | 0038-220-000 | Compression Spring | 2 |
| S | 0004-135-000 | Button Hd. Cap Screw | 4 |
| T | 0011-002-000 | Flat Washer | 4 |
| W | 0037-074-000 | Hole Plug | 2 |
| X | 1066-126-019 | Spring Plate | 2 |


Optional 3-Position Siderail Assembly, Right and Left

Assembly part numbers
1066-026-015 (Right)
1066-026-017 (Left)

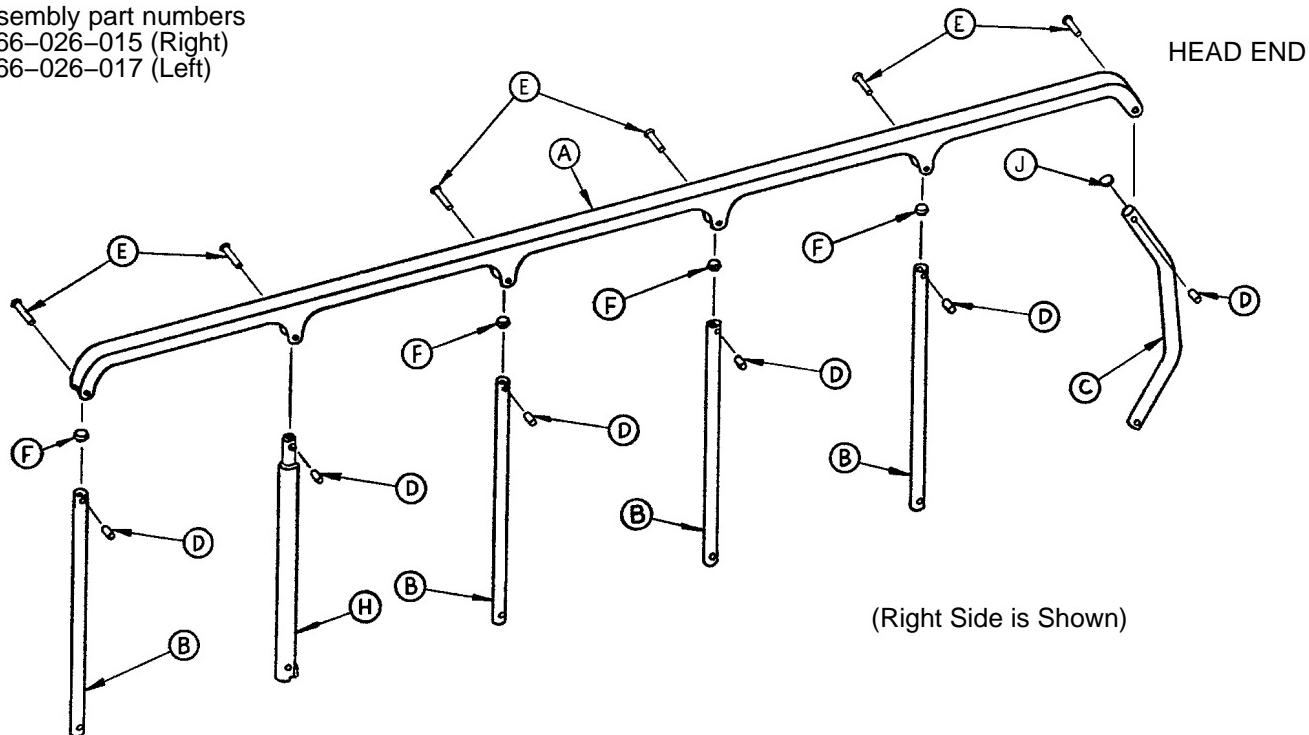


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------|------|
| A | 1010-026-015 | Top Rail | 1 |
| B | 1010-026-083 | Upright | 4 |
| C | 1010-026-084 | Upright, Bent | 1 |
| D | 1010-026-082 | Sleeve, Bearing | 6 |
| E | 0025-106-000 | Semi-Tubular Rivet | 6 |
| F | 1010-026-010 | Round Hole Plug | 4 |
| H | 1066-026-027 | Latch Upright Ass'y | 1 |
| J | 1010-026-012 | Bent Spindle Rest | 1 |

Optional Transfer System Assembly

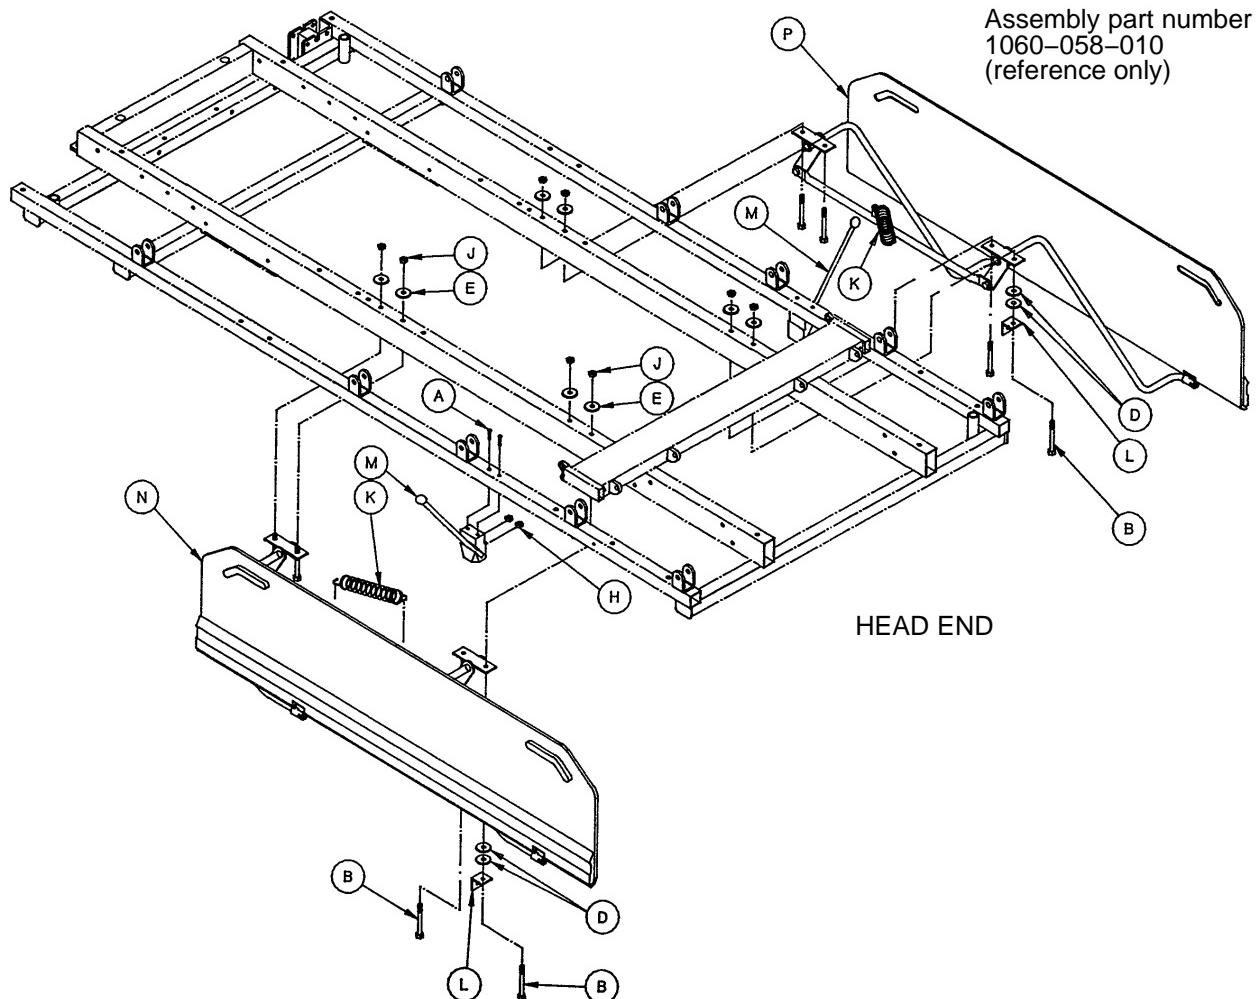


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 0002-100-000 | Pan Hd. Mach. Screw | 4 |
| B | 0003-073-000 | Hex Hd. Cap Screw | 8 |
| D | 0011-002-000 | Washer | 4 |
| E | 0011-180-000 | Washer | 8 |
| H | 0016-003-000 | Fiberlock Nut | 4 |
| J | 0016-028-000 | Nylock Nut | 8 |
| K | 0038-218-000 | Extension Spring | 2 |
| L | 1010-024-025 | Spring Retainer | 2 |
| M | (page 95) | Board Support Assembly | 2 |
| N | (page 96) | Arm Board Ass'y, Left | 1 |
| P | (page 97) | Arm Board Ass'y, Right | 1 |

1010-024-030 Arm Board Support Assembly

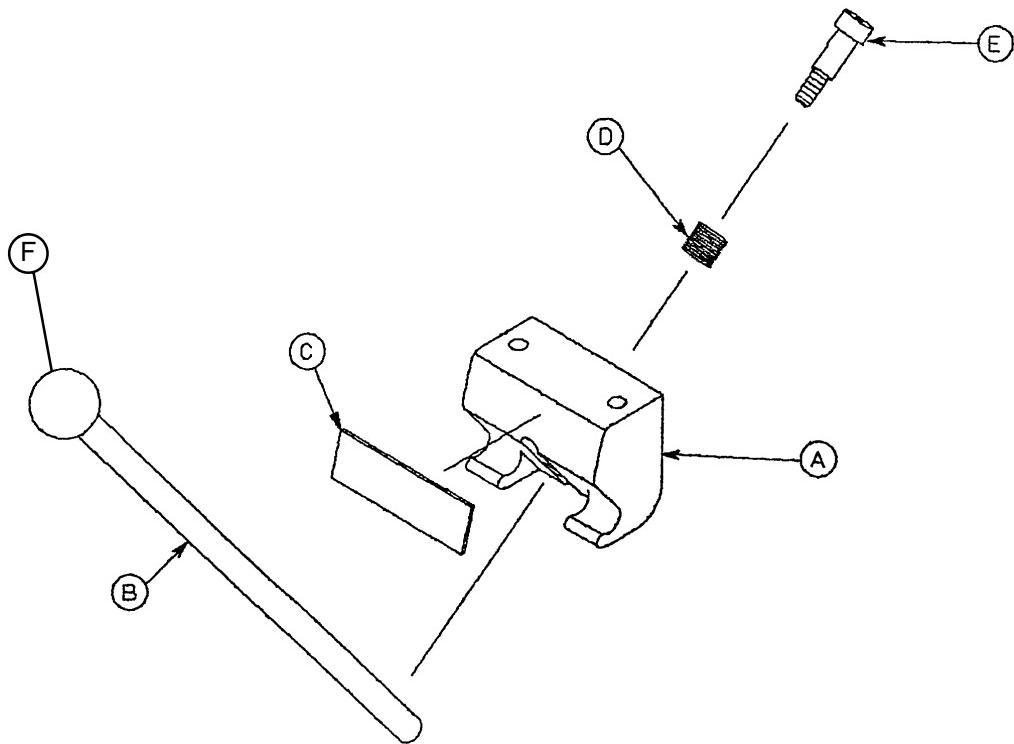


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------|------|
| A | 1010-024-015 | Support Block | 1 |
| B | 1010-024-016 | Support Arm | 1 |
| C | 1010-024-014 | Warning Label | 1 |
| D | 0038-263-000 | Spring | 1 |
| E | 0008-017-000 | Shoulder Bolt | 1 |
| F | 1010-026-046 | Ball Knob | 1 |

1060-001-114 Optional Transfer Board, Left

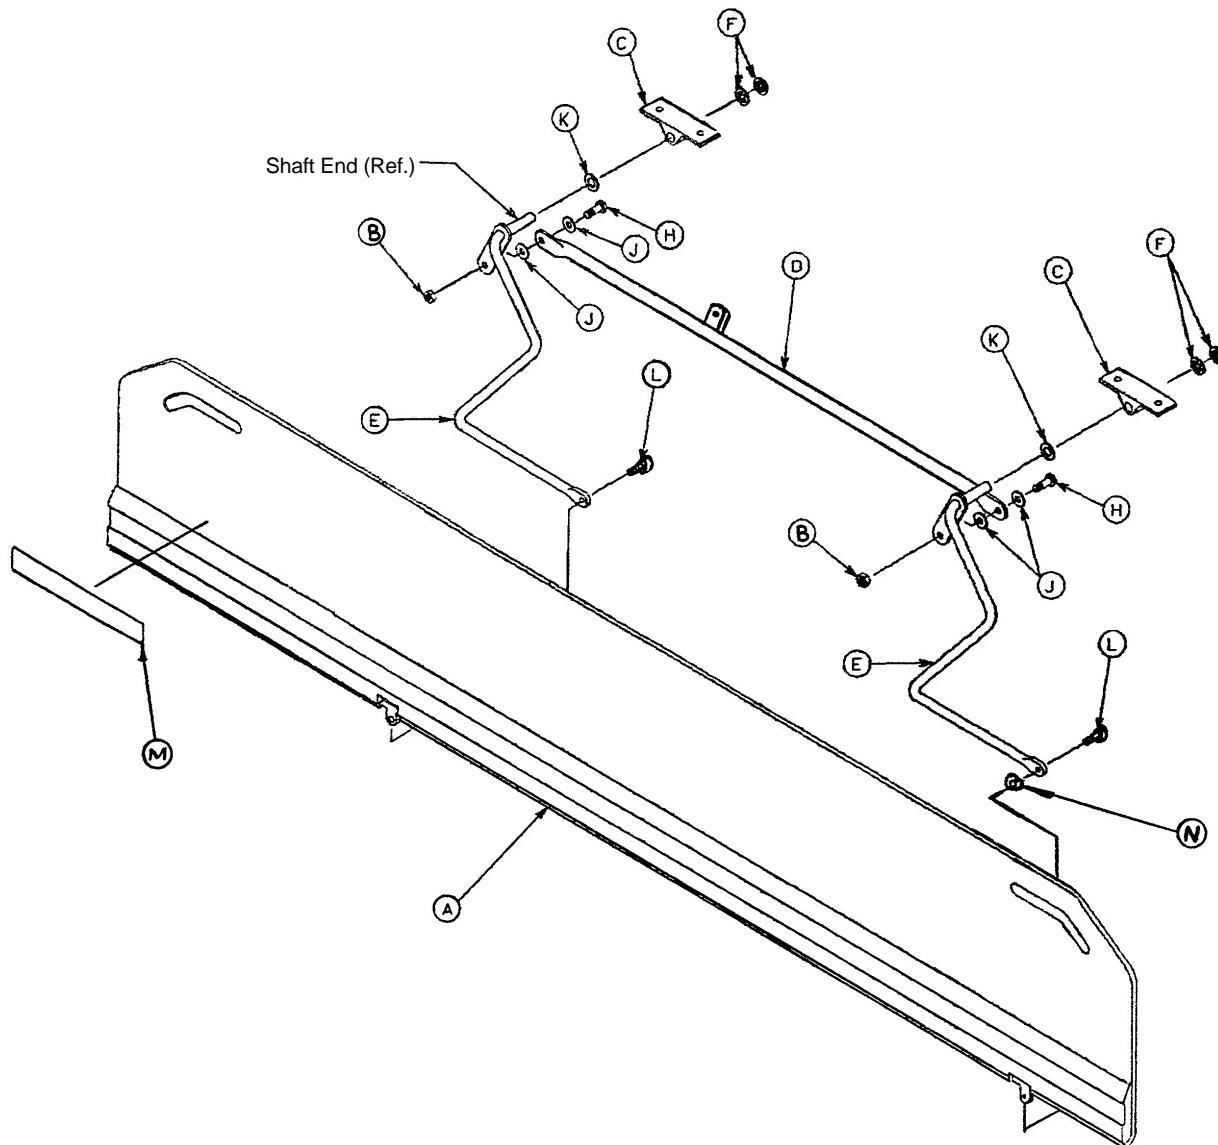

| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 1060-001-077 | Arm Board Ass'y, Left | 1 |
| B | 0016-028-000 | Nylock Hex Nut | 2 |
| C | 1010-032-098 | Pivot | 2 |
| D | 1060-001-074 | Connecting Link Ass'y | 1 |
| E | 1010-032-094 | Pivot Arm Ass'y, Left | 2 |
| F | 0028-093-000 | Retaining Ring | 4 |
| H | 0003-050-000 | Hex Hd. Cap Screw | 2 |
| J | 0011-224-000 | Nylon Flat Washer | 4 |
| K | 0014-021-000 | Nylon Flat Washer | 2 |
| L | 0004-156-000 | Soc. Hd. Cap Screw | 2 |
| M | 0721-024-046 | Label | 1 |
| N | 0014-002-000 | Washer | 1 |


1060-001-115 Optional Transfer Board, Right

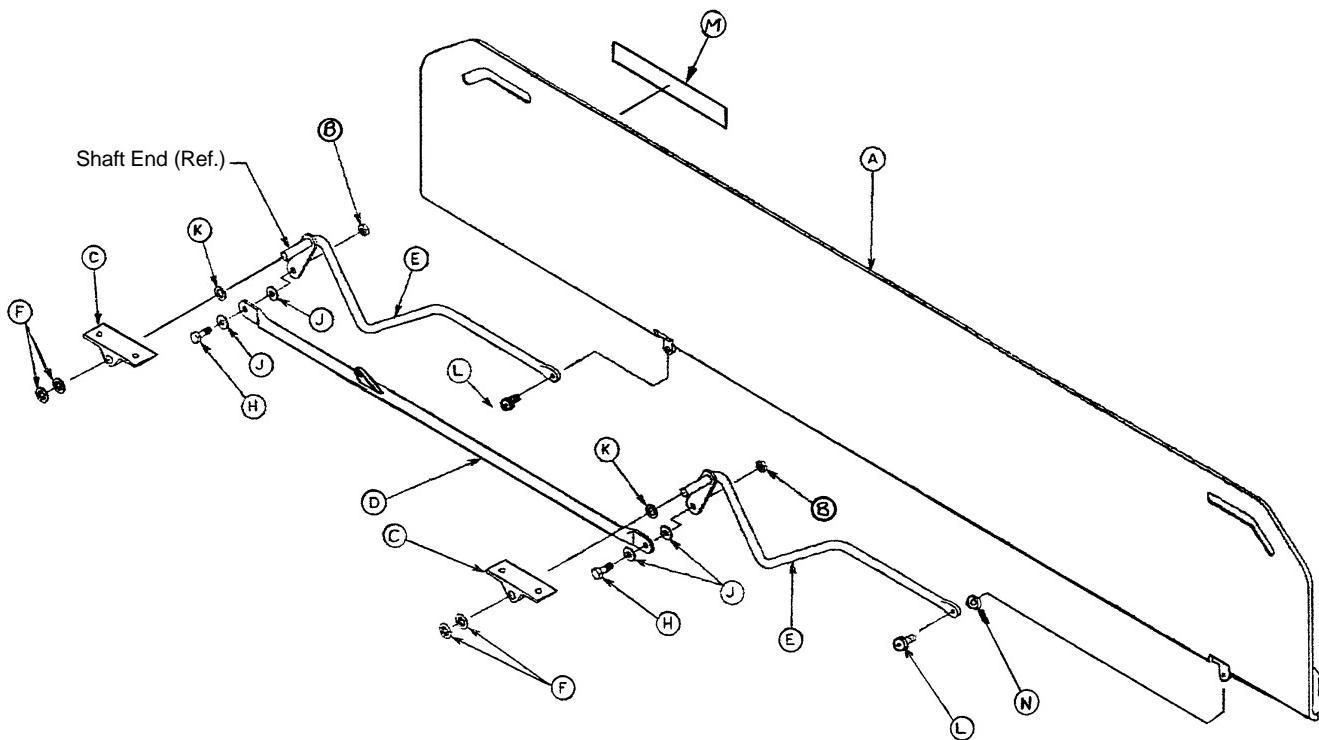

| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 1060-001-076 | Arm Board Ass'y, Right | 1 |
| B | 0016-028-000 | Nylock Hex Nut | 2 |
| C | 1010-032-098 | Pivot | 2 |
| D | 1060-0010-74 | Connecting Link Ass'y | 1 |
| E | 1010-032-096 | Pivot Arm Ass'y, Right | 2 |
| F | 0028-093-000 | Retaining Ring | 4 |
| H | 0003-050-000 | Hex Hd. Cap Screw | 2 |
| J | 0011-224-000 | Nylon Flat Washer | 4 |
| K | 0014-021-000 | Nylon Flat Washer | 2 |
| L | 0004-156-000 | Soc. Hd. Cap Screw | 2 |
| M | 0721-024-046 | Label | 1 |
| N | 0014-002-000 | Washer | 1 |

1069-160-010 Optional Pre-Op/Post-Op Head Pads


Applies to Crank Fowler Assembly Option Only

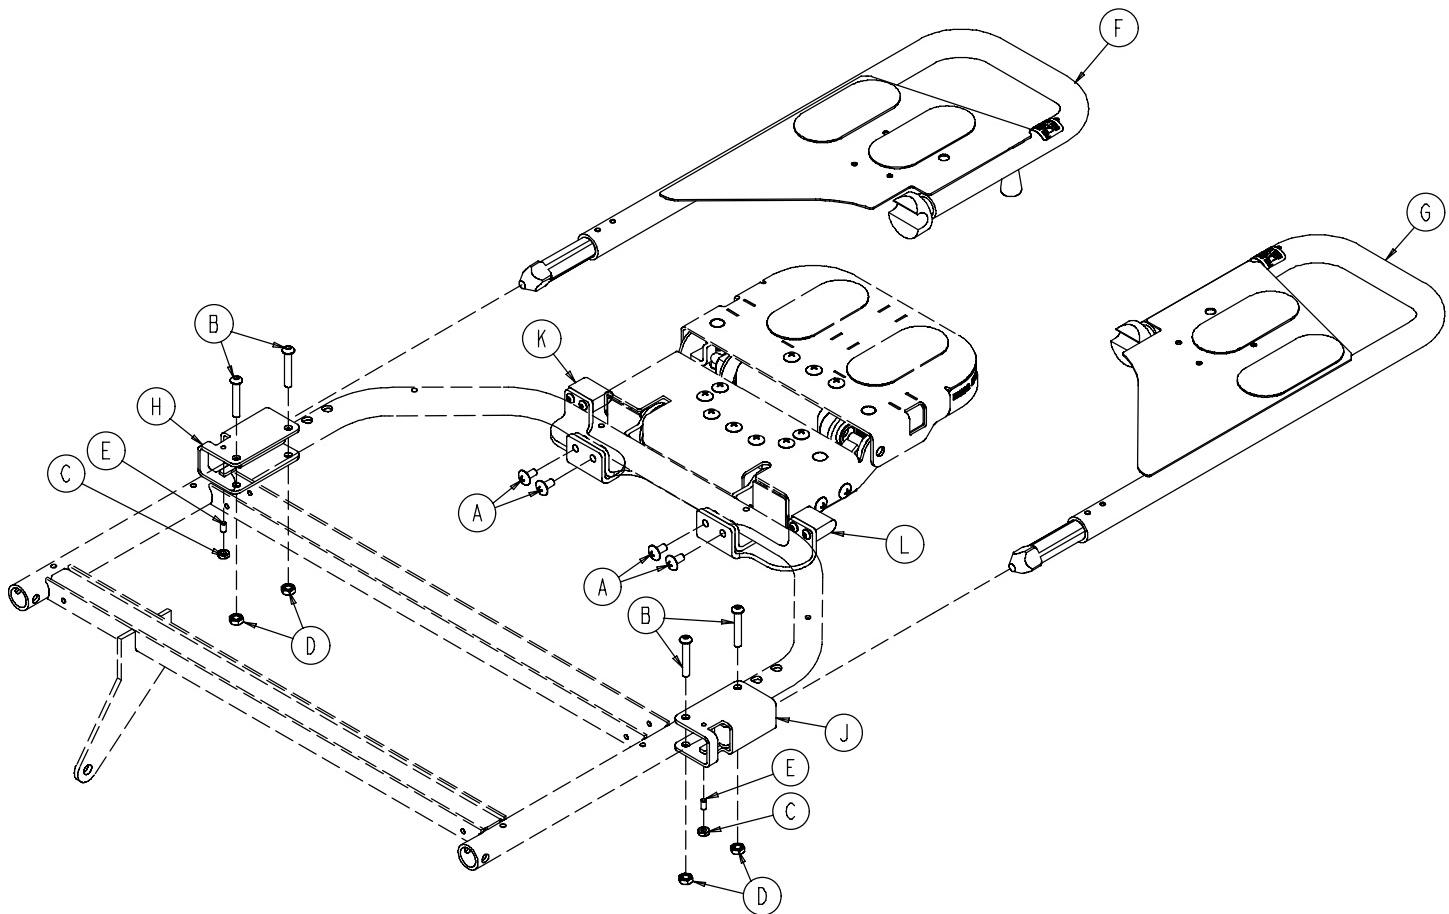

| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------------|------|
| A | 0007-080-000 | Truss Hd. Torx Screw | 4 |
| B | 0004-135-000 | But. Hd. Cap Screw | 4 |
| C | 0015-004-000 | Hex Nut | 2 |
| D | 0016-005-000 | Conelock Nut | 4 |
| E | 0021-119-000 | Set Screw | 2 |
| F | (page 100) | Head Piece, Right | 1 |
| G | (page 100) | Head Piece, Left | 1 |
| H | 1069-060-060 | Receptacle Weldment, Right | 1 |
| J | 1069-060-070 | Receptacle Weldment, Left | 1 |
| K | (page 99) | Latch Bracket, Right | 1 |
| L | (page 99) | Latch Bracket, Left | 1 |

1069-060-220/225 Latch Bracket Assembly, Right/Left


Applies to Crank Fowler Assembly Option Only

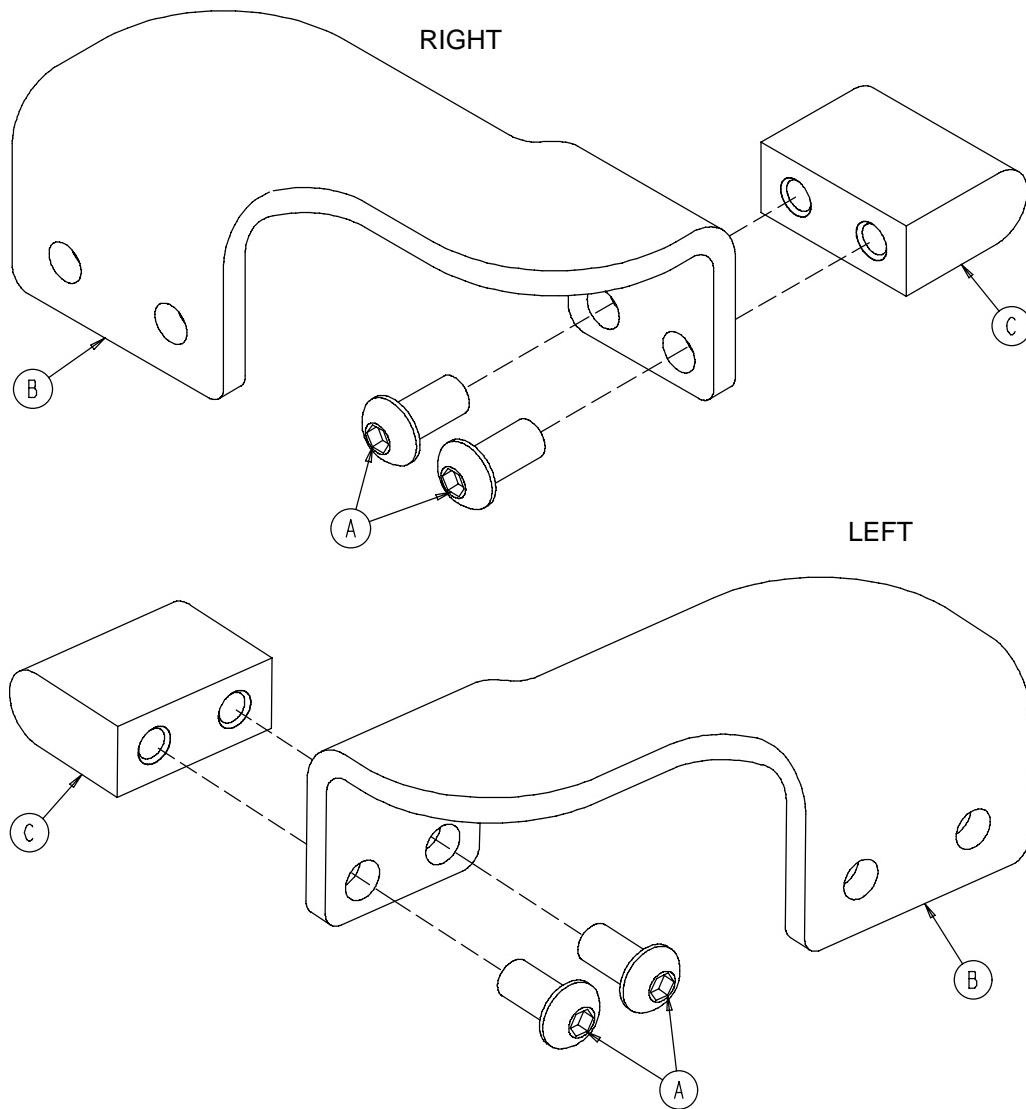

| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------|------|
| A | 0004-325-000 | Button Hd. Cap Screw | 2 |
| B | 1069-060-221 | Bracket, Right | 1 |
| | 1069-060-226 | Bracket, Left | 1 |
| C | 1069-060-222 | Latch | 1 |


1069-060-025/035 Head Piece Assembly, Right/Left

Applies to Crank Fowler Assembly Option Only

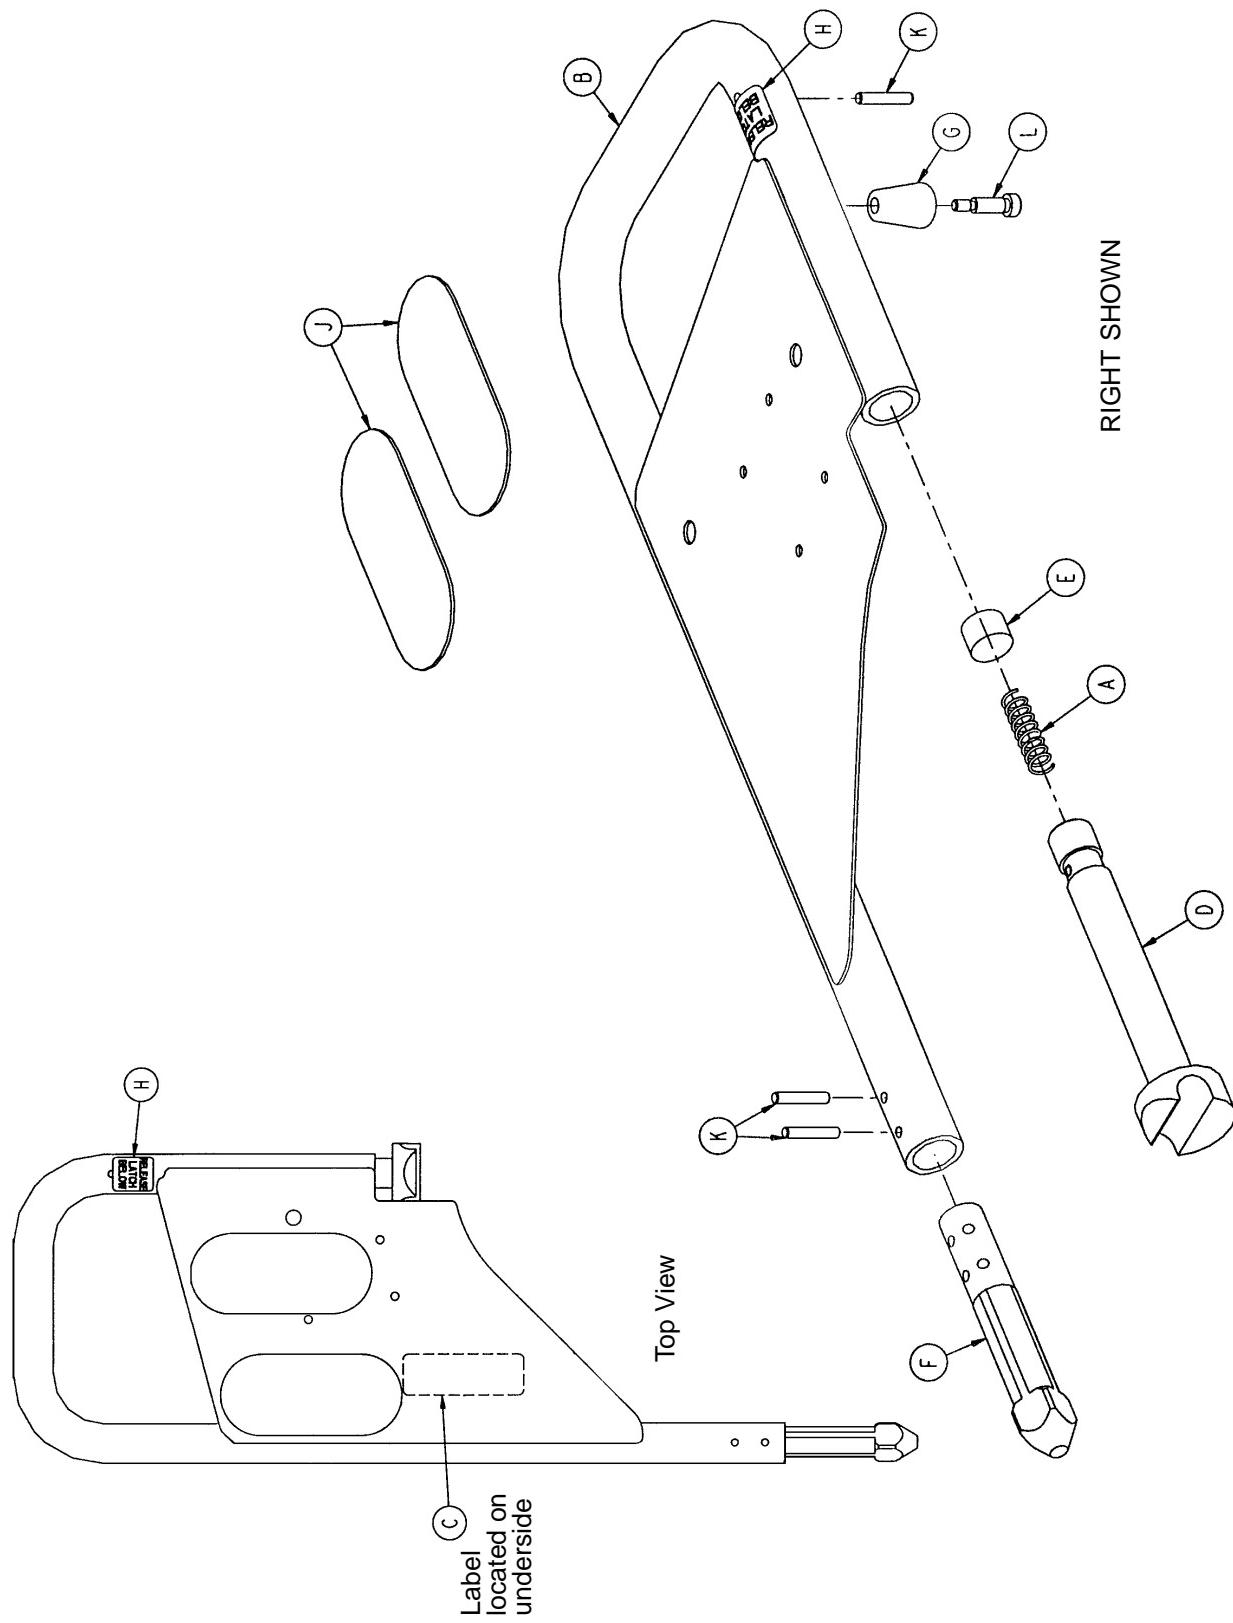


1069-060-025/035 Head Piece Assembly, Right/Left

Applies to Crank Fowler Assembly Option Only

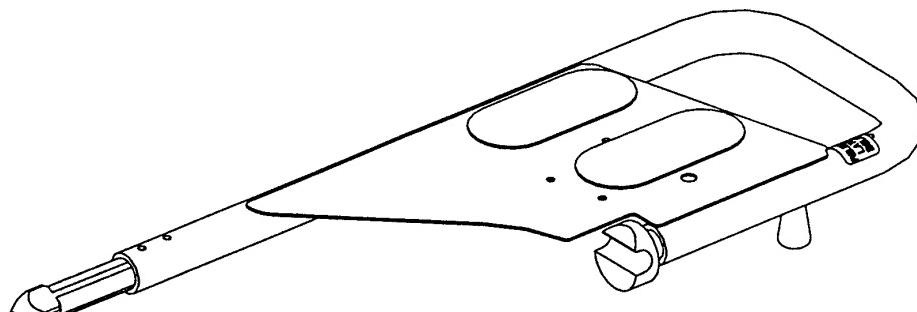

Right Head Piece

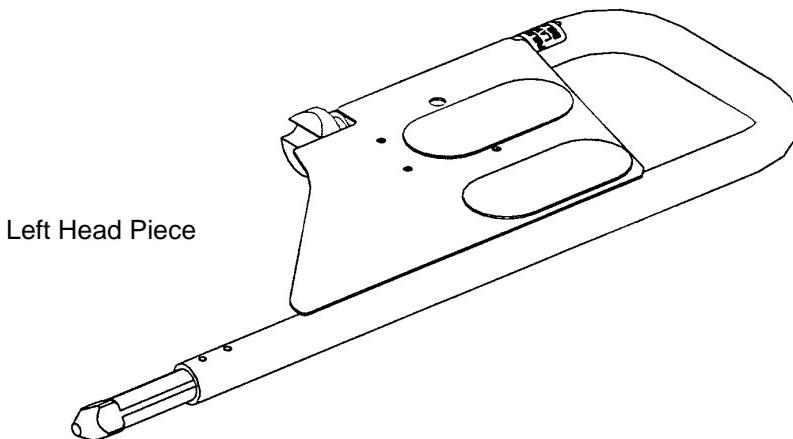


Left Head Piece


| Item | Part No. | Part Name | Qty. |
|------|--------------|----------------------|------|
| A | 0038-162-000 | Pin Slide Spring | 1 |
| B | 1069-060-040 | Tube Weldment, Right | 1 |
| | 1069-060-050 | Tube Weldment, Left | 1 |
| C | 1069-060-090 | Head Extension Label | 1 |
| D | 1069-060-140 | Slider Pin | 1 |
| E | 1069-060-142 | Spring Spacer | 1 |
| F | 1069-060-145 | Cam Pin | 1 |
| G | 1069-060-012 | Latch Knob | 1 |
| H | 1069-260-091 | Latch Release Label | 1 |
| J | 7900-001-102 | Velcro Pile (4.5") | 2 |
| K | 0026-179-000 | Spirol Pin | 3 |
| L | 0008-020-000 | Shoulder Bolt | 1 |

0390-025-022 Optional Removable I.V. Pole Assembly

| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------|------|
| A | 0024-023-000 | Plastic Knob | 1 |
| B | 0390-003-053 | Double IV Ass'y | 1 |
| C | 0393-003-043 | Tube Assembly | 1 |
| D | 0004-496-000 | Soc. Hd. Cap Screw | 1 |

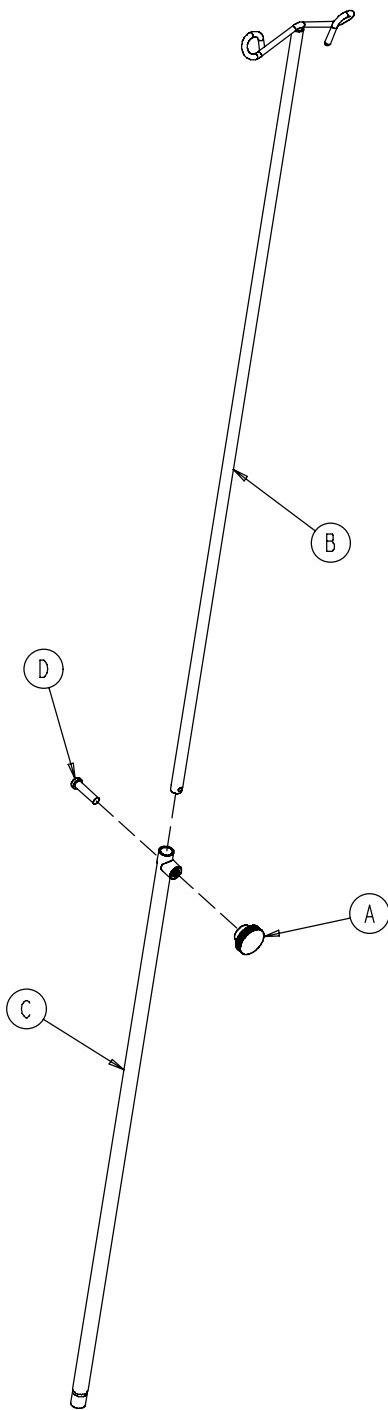


1010-080-000 Optional 2-Stage I.V. Assembly Foot End, Right

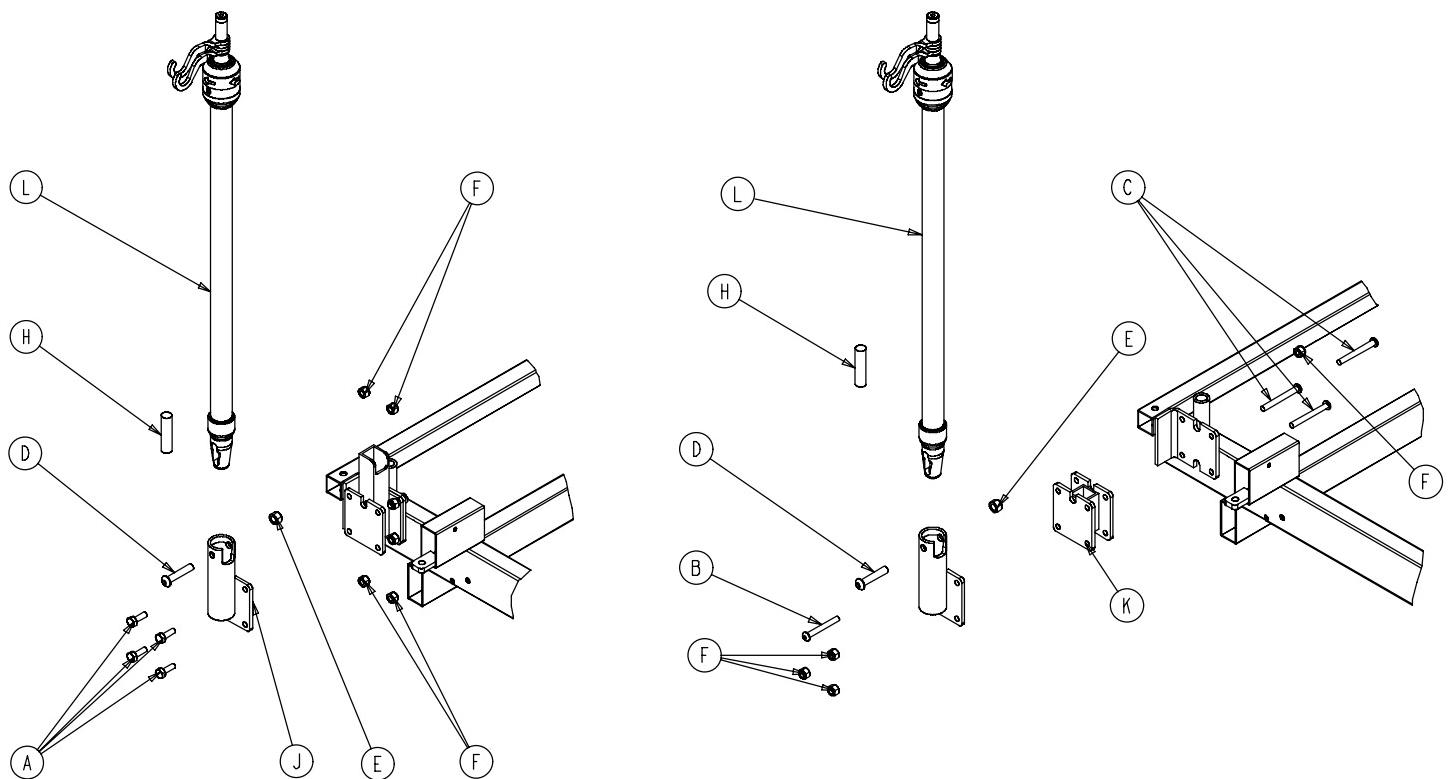


| Item | Part No. | Part Name | Qty. |
|-----------------|--------------|-----------------------|------|
| A | 0003-050-000 | But. Hd. Cap Screw | 4 |
| B | 0004-097-000 | But. Hd. Cap Screw | 1 |
| C | 0004-163-000 | But. Hd. Cap Screw | 3 |
| D | 0004-199-000 | But. Hd. Cap Screw | 1 |
| E | 0016-011-000 | Flexlock Nut | 1 |
| F | 0016-028-000 | Nylock Nut | 4 |
| H | 1001-059-042 | IV Plug | 1 |
| J | 1001-259-111 | IV Socket Ass'y | 1 |
| K | 1020-054-067 | Spacer Weldment | 3 |
| B (page 104) | | 2-Stage IV Pole Ass'y | 1 |

1211-210-010 Optional 2-Stage IV Pole Assembly

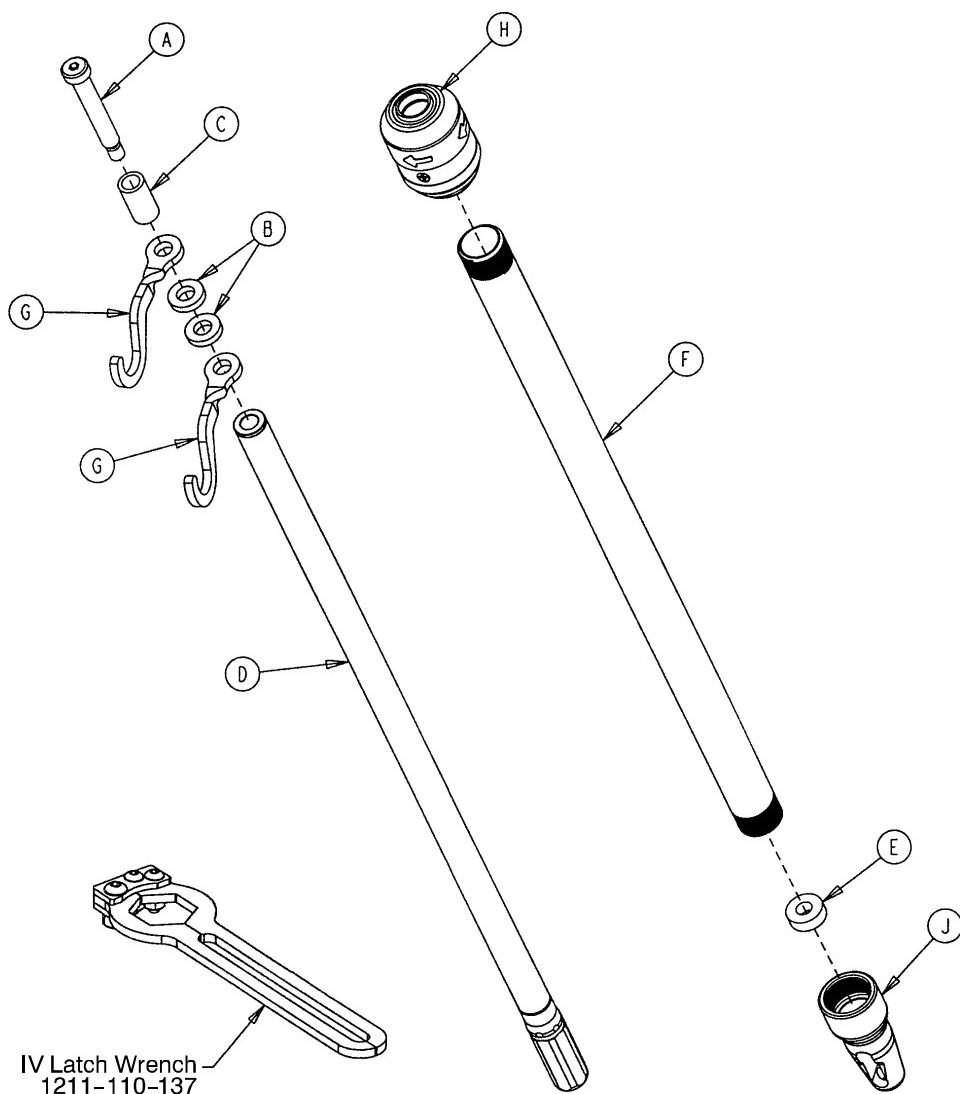


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------|------|
| A | 0008-031-000 | Soc. Hd. Cap Screw | 1 |
| B | 0052-017-000 | Washer | 2 |
| C | 0926-400-162 | Spacer | 1 |
| D | 1211-210-029 | 2nd Stage Assembly | 1 |
| E | 1001-359-013 | Dampener | 1 |
| F | 1001-159-028 | Base Tube | 1 |
| G | 1010-059-016 | IV Hook | 2 |
| H | (page 105) | IV Pole Latch | 1 |
| J | 1001-359-112 | Pivot | 1 |

1211-210-026 IV Pole Latch Assembly

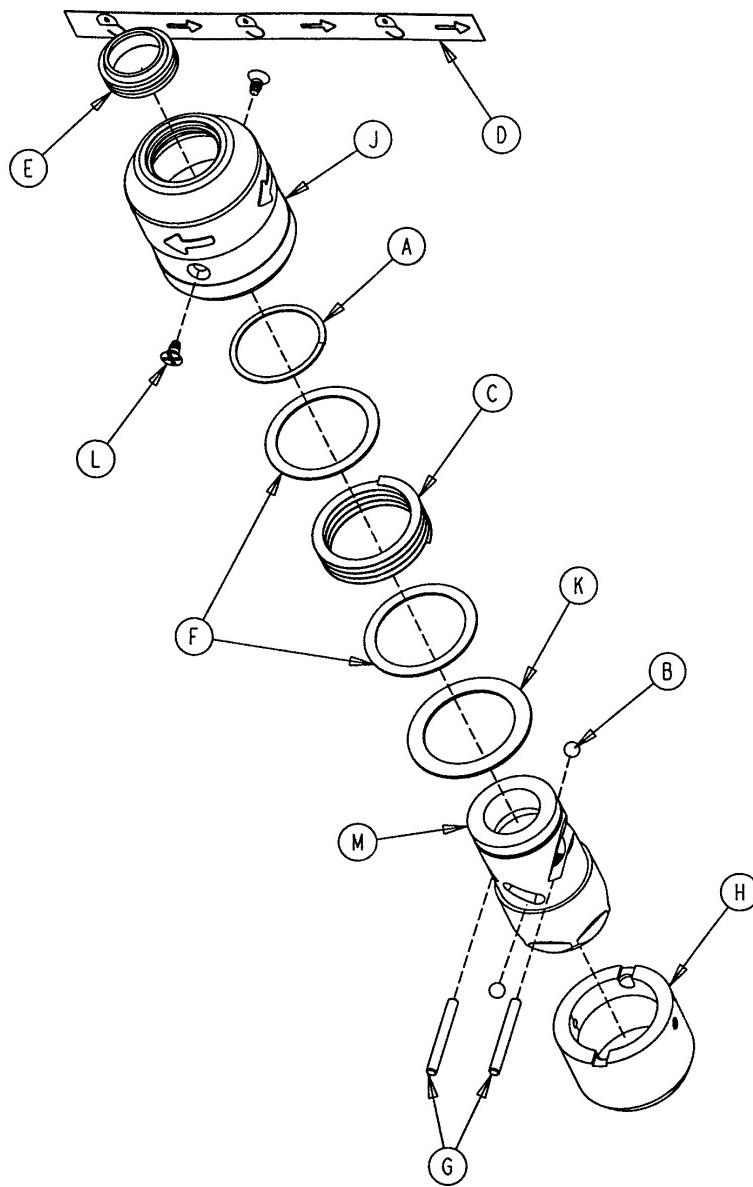


| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 0028-167-000 | Retaining Ring | 1 |
| B | 0031-004-000 | Steel Ball | 2 |
| C | 0038-392-000 | Crest-to-Crest Spring | 1 |
| D | 1211-091-034 | Release Label | 1 |
| E | 1211-110-018 | IV Latch Seal | 1 |
| F | 1211-110-020 | Washer | 2 |
| G | 1211-110-021 | IV Latch Locking Pin | 2 |
| H | 1211-110-022 | IV Latch Guide | 1 |
| J | 1211-110-024 | IV Latch O.D. Housing | 1 |
| K | 1211-110-035 | Washer | 1 |
| L | 1211-110-036 | Self-Tapping Screw | 2 |
| M | 1211-210-023 | IV Latch I.D. Housing | 1 |

1020-062-000 Optional 3-Stage I.V. Assembly Foot End, Right

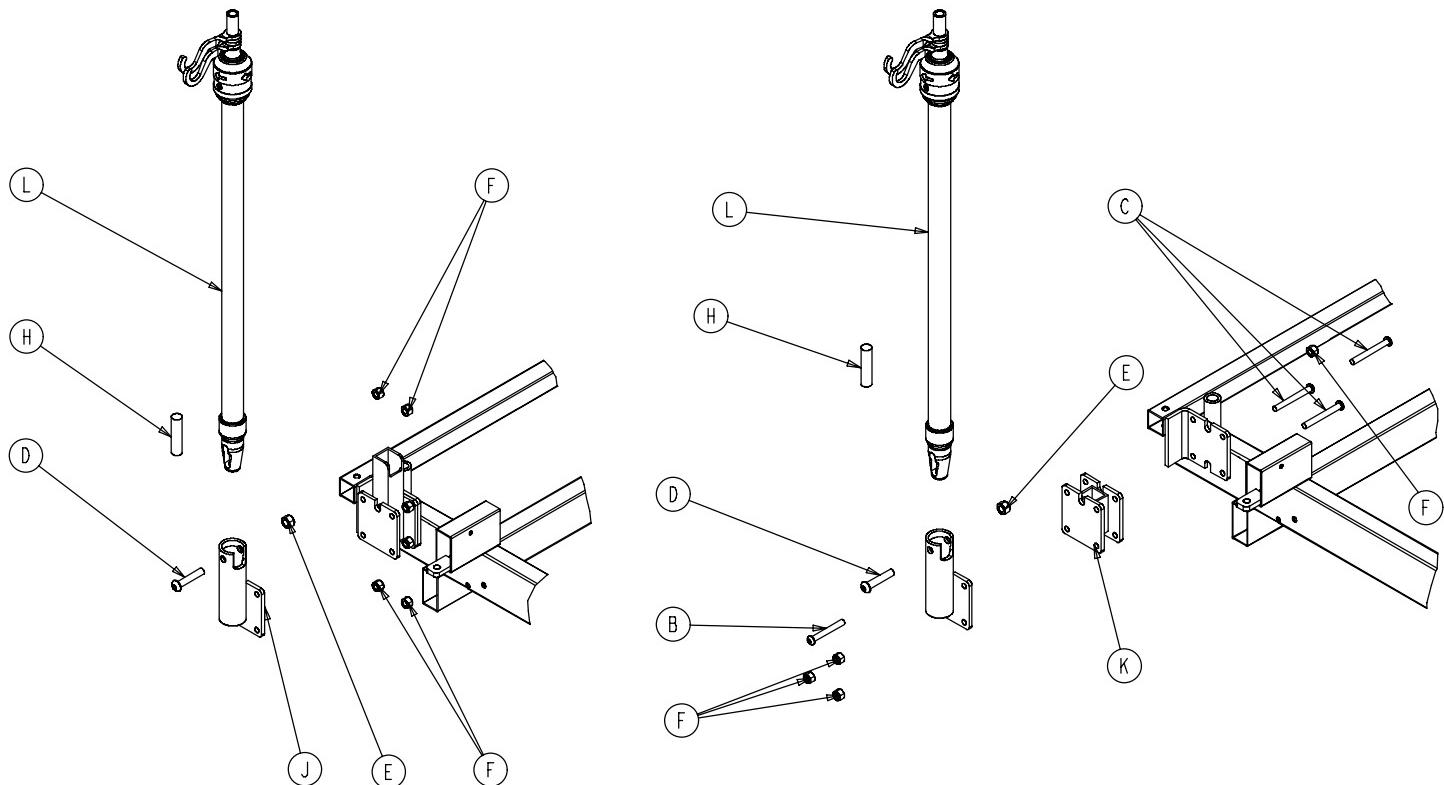


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------|------|
| A | 0003-050-000 | But. Hd. Cap Screw | 4 |
| B | 0004-097-000 | But. Hd. Cap Screw | 1 |
| C | 0004-163-000 | But. Hd. Cap Screw | 3 |
| D | 0004-199-000 | But. Hd. Cap Screw | 1 |
| E | 0016-011-000 | Flexlock Nut | 1 |
| F | 0016-028-000 | Nylock Nut | 4 |
| H | 1001-059-042 | Plug | 3 |
| J | 1001-259-111 | IV Pivot Weldment | 1 |
| K | 1020-054-067 | Spacer Weldment | 3 |
| L | (page 107) | IV Pole Assembly | 1 |

1211-211-010 Optional 3-Stage IV Pole Assembly

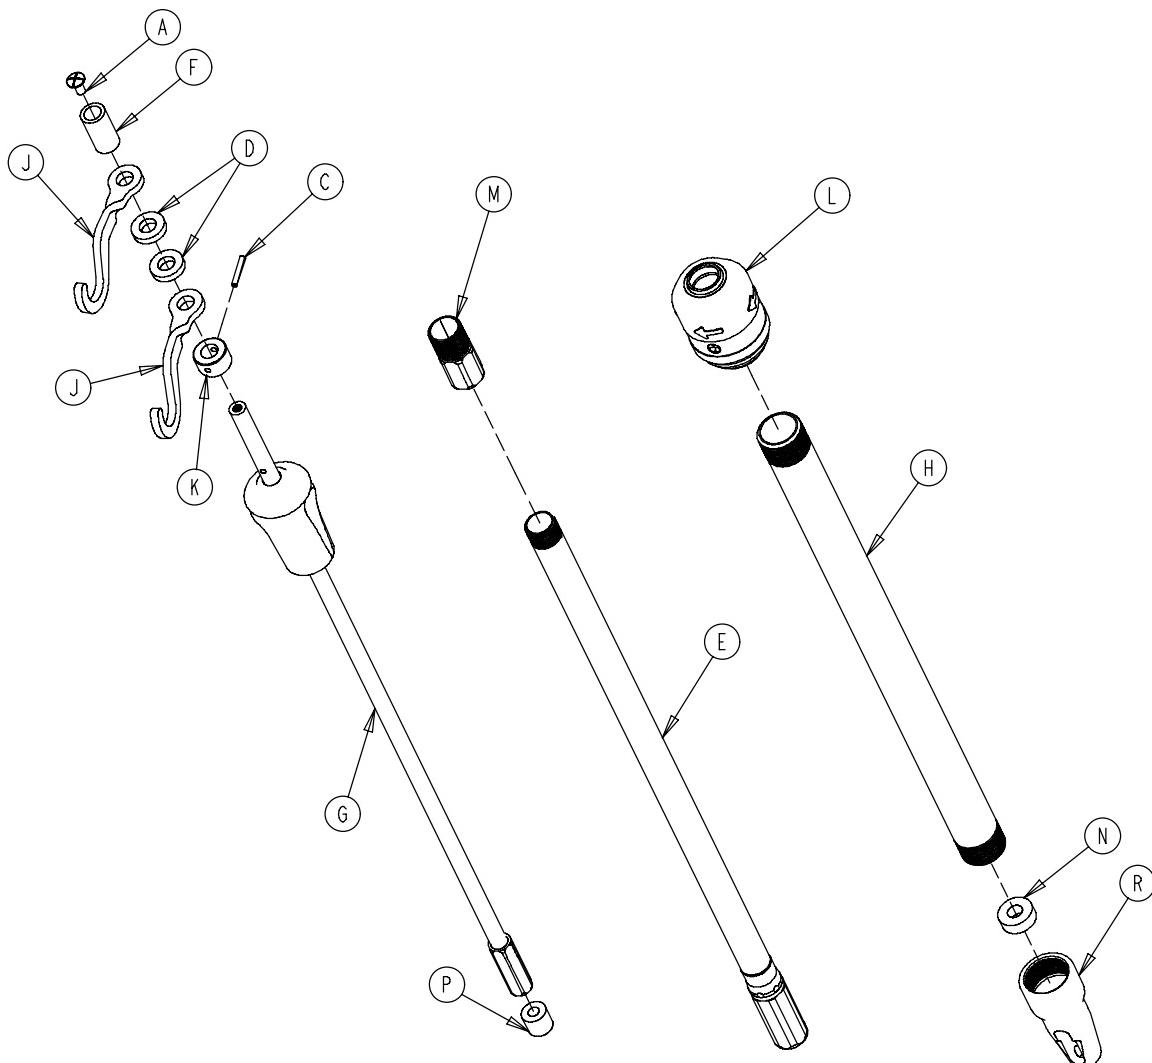


| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------|------|
| A | 0007-004-000 | Truss Hd. Machine Screw | 1 |
| C | 0026-076-000 | Roll Pin | 1 |
| D | 0052-017-000 | Spacer | 2 |
| E | 1211-210-031 | 2nd Stage Assembly | 1 |
| F | 0926-400-162 | Spacer | 1 |
| G | (page 108) | 3rd Stage Assembly | 1 |
| H | 1001-161-023 | Base Tube | 1 |
| J | 1010-059-016 | IV Hook | 2 |
| K | 1010-061-014 | Collar | 1 |
| L | (page 105) | IV Pole Latch | 1 |
| M | 1211-110-016 | Threaded Adaptor | 1 |
| N | 1001-359-013 | Dampener | 1 |
| P | 1001-359-014 | Dampener | 1 |
| R | 1001-359-112 | Pivot | 1 |

3-Stage IV Pole 3rd Stage Assembly

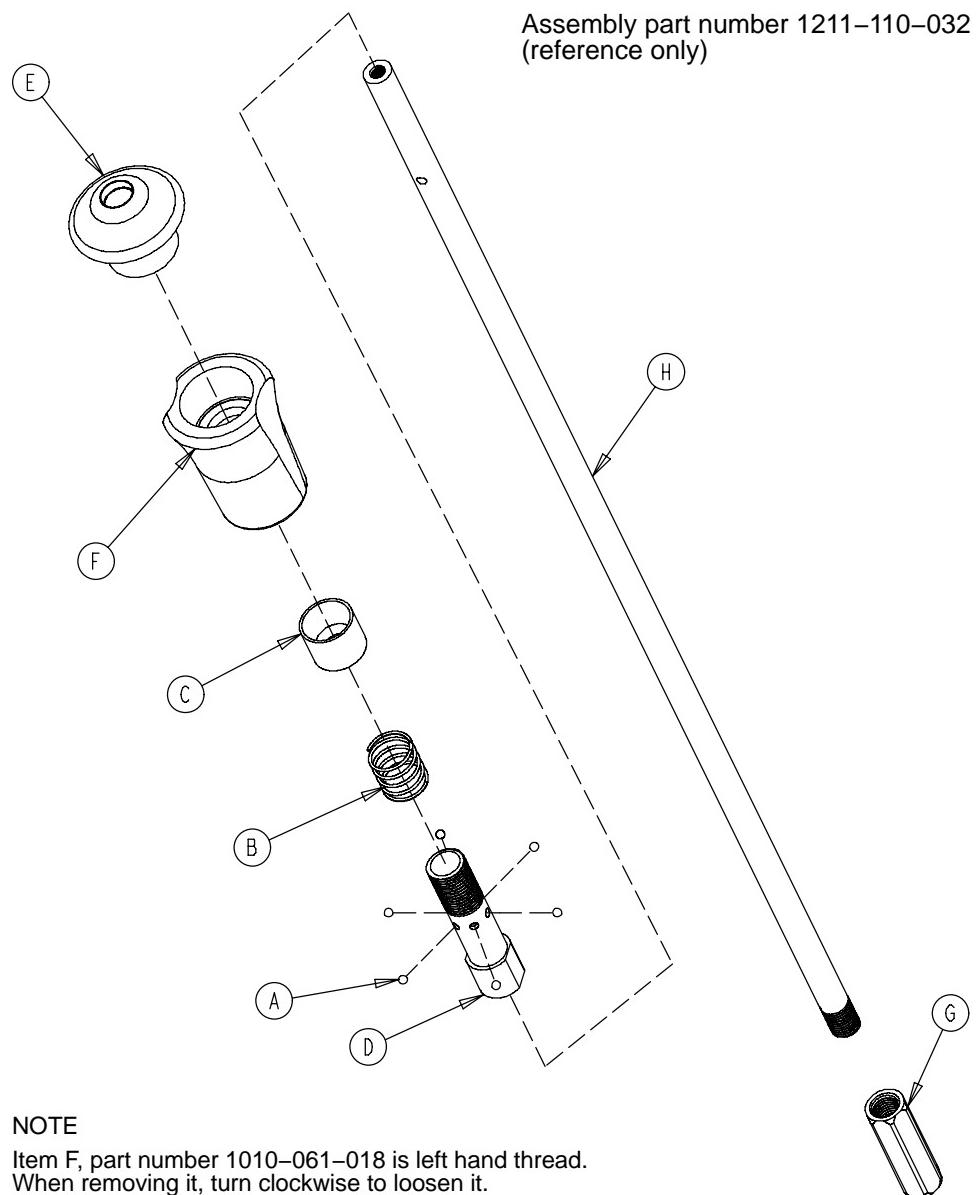


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------|------|
| A | 0031-021-000 | Ball | 6 |
| B | 0038-303-000 | Compression Spring | 1 |
| C | 1010-061-013 | Ball Retainer | 1 |
| D | 1010-061-016 | Retaining Shaft | 1 |
| E | 1010-061-017 | Thumb Knob | 1 |
| F | 1010-061-018 | Hand Guard | 1 |
| G | 1211-110-117 | Nut | 1 |
| H | 1211-110-033 | 3rd Extension Rod | 1 |

1010-030-000 Optional Upright Oxygen Bottle Holder

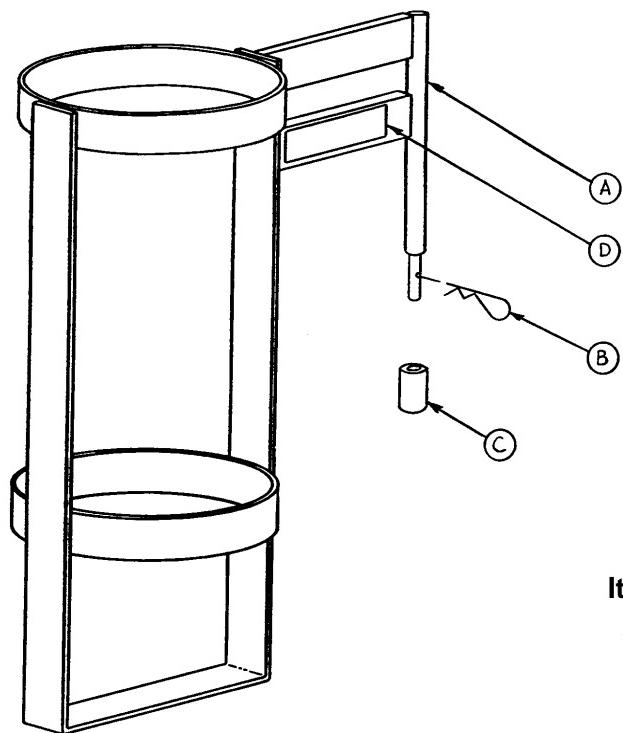


| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 1010-030-011 | Upright Bottle Holder | 1 |
| B | 0027-012-000 | Cotter Pin | 1 |
| C | 0741-030-024 | Nylon Stand-Off | 1 |
| D | 1010-030-017 | Specification Label | 1 |

0785-045-200 Optional Defibrillator Tray Assembly

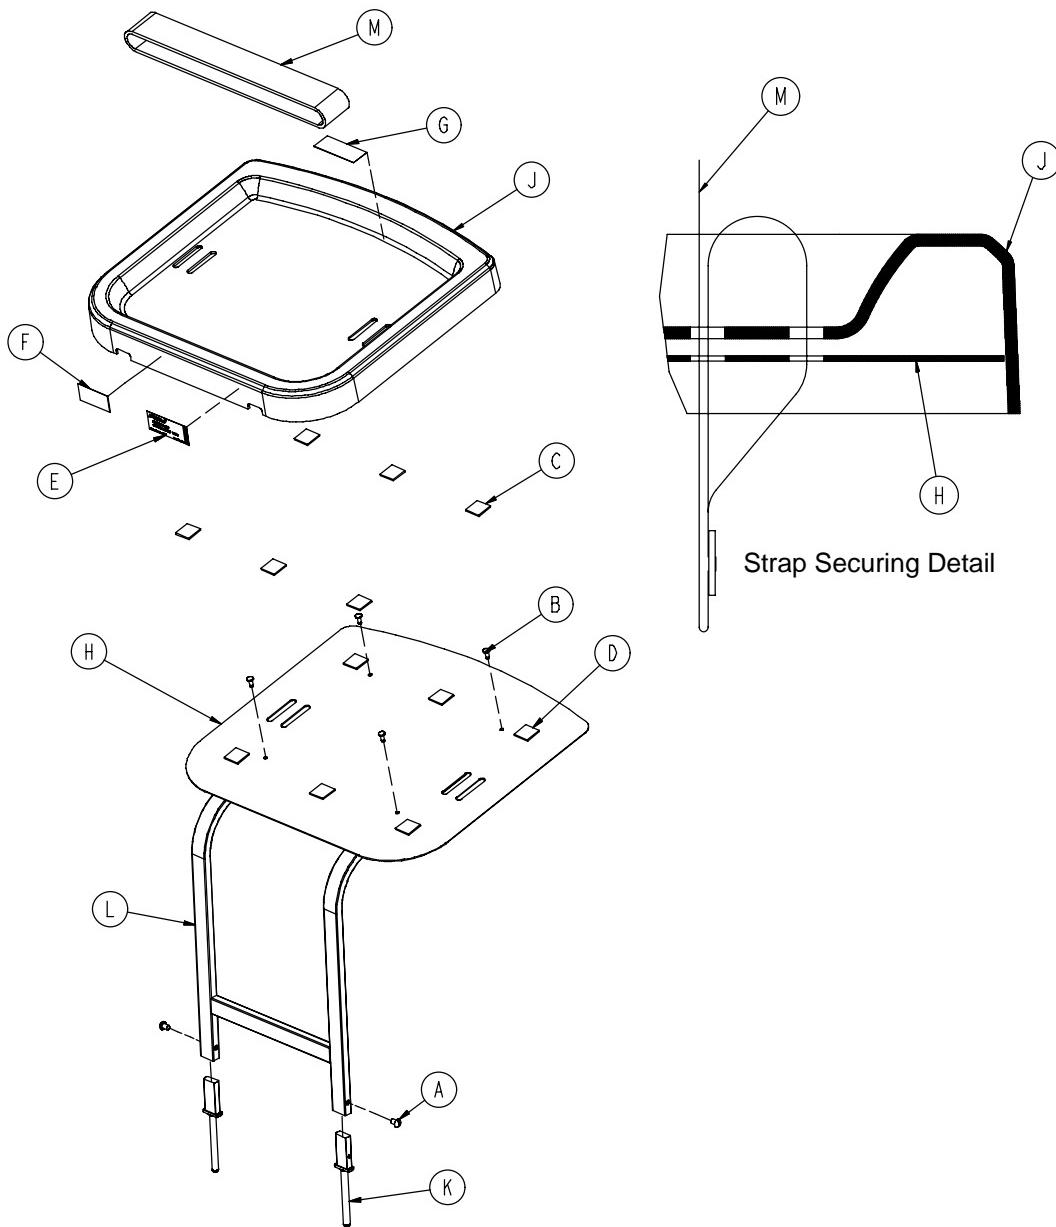


| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------|------|
| A | 0002-044-000 | Round Hd. Machine Screw | 2 |
| B | 0025-055-000 | Rivet | 4 |
| C | 0029-008-000 | Dual Lock | 6 |
| D | 0029-010-000 | Dual Lock | 6 |
| E | 0785-045-201 | Defib Tray Label | 1 |
| F | 0785-045-402 | Push/Pull Label | 1 |
| G | 0785-045-403 | Weight Capacity Label | 1 |
| H | 0785-045-204 | Tray Support | 1 |
| J | 0785-045-207 | Tray | 1 |
| K | 0785-045-208 | Bayonet | 1 |
| L | 0785-045-210 | Frame Weldment | 1 |
| M | 1010-050-021 | Long Strap | 1 |

0785-045-400 Optional Defib Tray/Foot Extender/ Foot Board

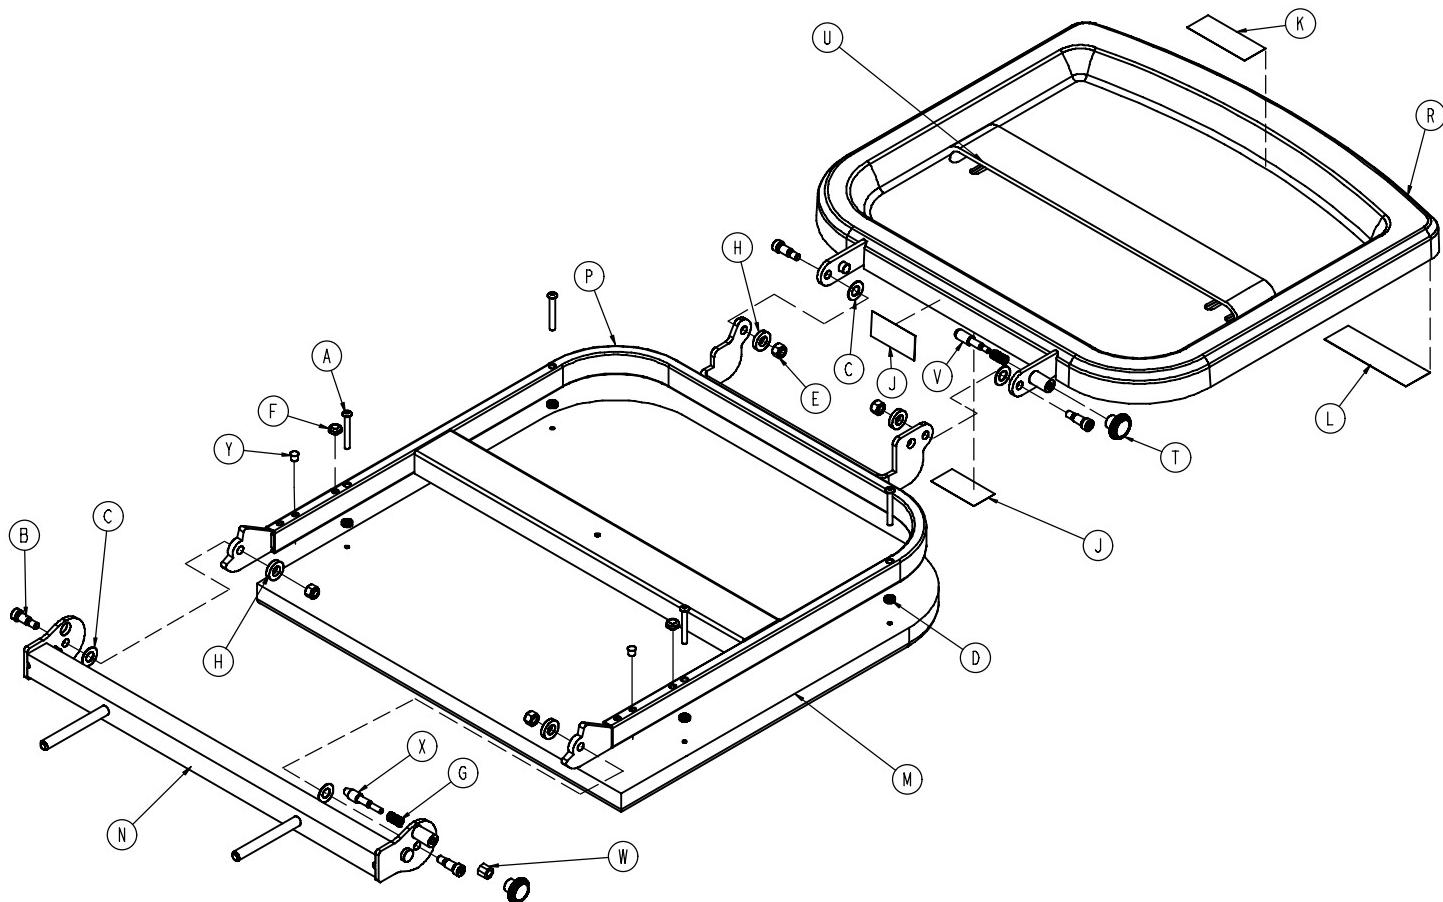


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------------|------|
| A | 0004-215-000 | But Hd. Cap Screw | 4 |
| B | 0008-049-000 | Soc. Hd. Cap Screw | 4 |
| C | 0014-020-000 | Washer | 4 |
| D | 0014-120-000 | Washer | 4 |
| E | 0016-028-000 | Hex Nut | 4 |
| F | 0037-052-000 | Rubber Bumper | 2 |
| G | 0038-133-000 | Compression Spring | 2 |
| H | 0052-017-000 | Spacer | 4 |
| J | 0785-045-402 | Push/Pull Label | 2 |
| K | 0785-045-403 | Weight Capacity Label | 1 |
| L | 0785-045-401 | Foot Extender/Defib Tray Label | 1 |
| M | 0785-045-405 | Cushion | 1 |
| N | 0785-045-410 | Base Mounting Weldment | 1 |
| P | 0785-045-420 | Frame Pivot Weldment | 1 |
| R | 0785-045-430 | Tray | 1 |
| T | 0785-045-450 | Knob | 2 |
| U | 1010-050-021 | Long Strap | 1 |
| V | 1010-050-242 | Lock Pin | 1 |
| W | 1010-050-250 | Lock Adjuster | 1 |
| X | 1010-050-248 | Lower Pin Lock | 1 |
| Y | 0721-031-065 | Hole Plug | 2 |

1068-251-000 Optional Temporal Wrist Rest Assembly

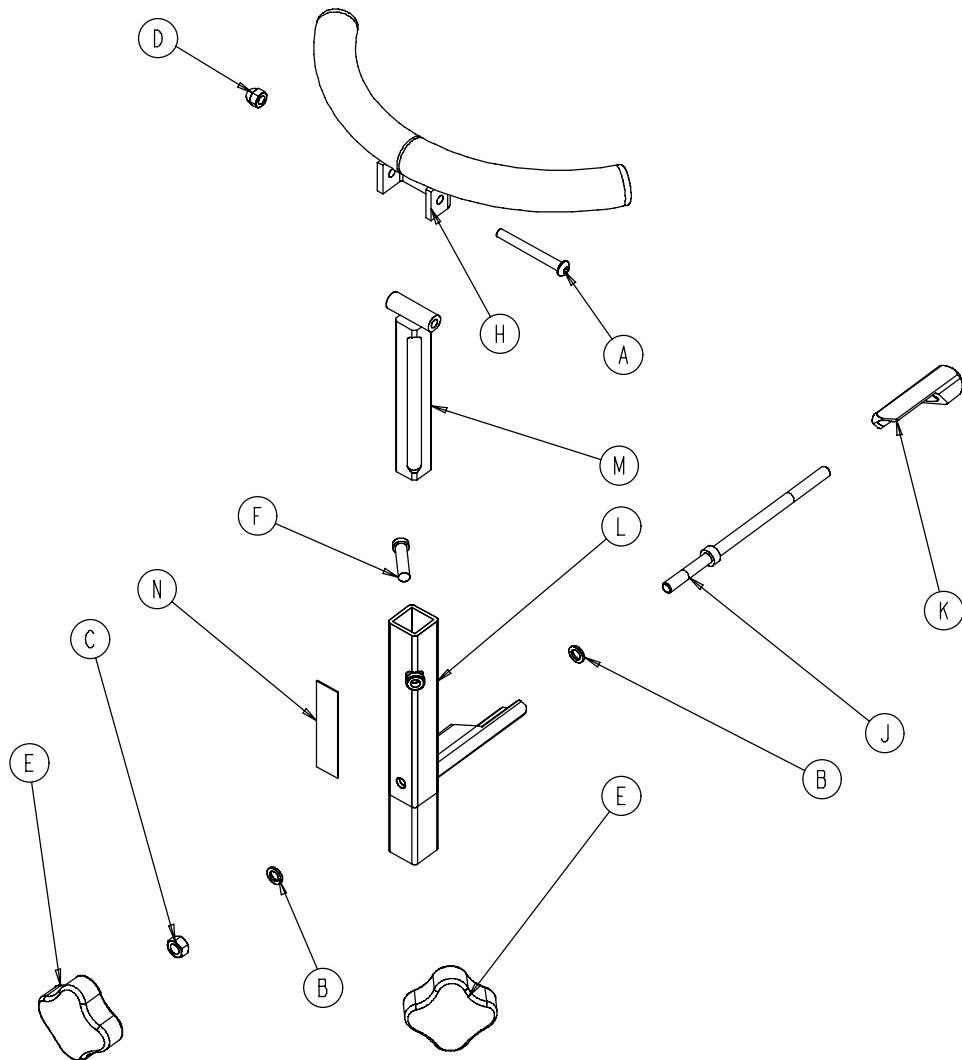

| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------------|------|
| A | 0004-163-000 | But. Hd. Cap Screw | 1 |
| B | 0014-003-000 | Fiber Washer | 2 |
| C | 0015-012-000 | Hex Nut | 1 |
| D | 0017-004-000 | Acorn Nut | 1 |
| E | 0024-054-000 | Knob, Female | 2 |
| F | 0004-371-000 | Low Profile Soc. Hd. Cap Scr. | 1 |
| H | 1068-051-050 | Tube Weldment | 1 |
| J | 1068-250-041 | Wedge Bolt | 1 |
| K | 1068-250-042 | Locking Wedge | 1 |
| L | 1068-250-050 | Base Tube Weldment | 1 |
| M | 1068-252-055 | Support Bar Weldment | 1 |
| N | 1068-290-051 | Specification Label | 1 |


1068-250-000 Optional Superior Wrist Rest Assembly

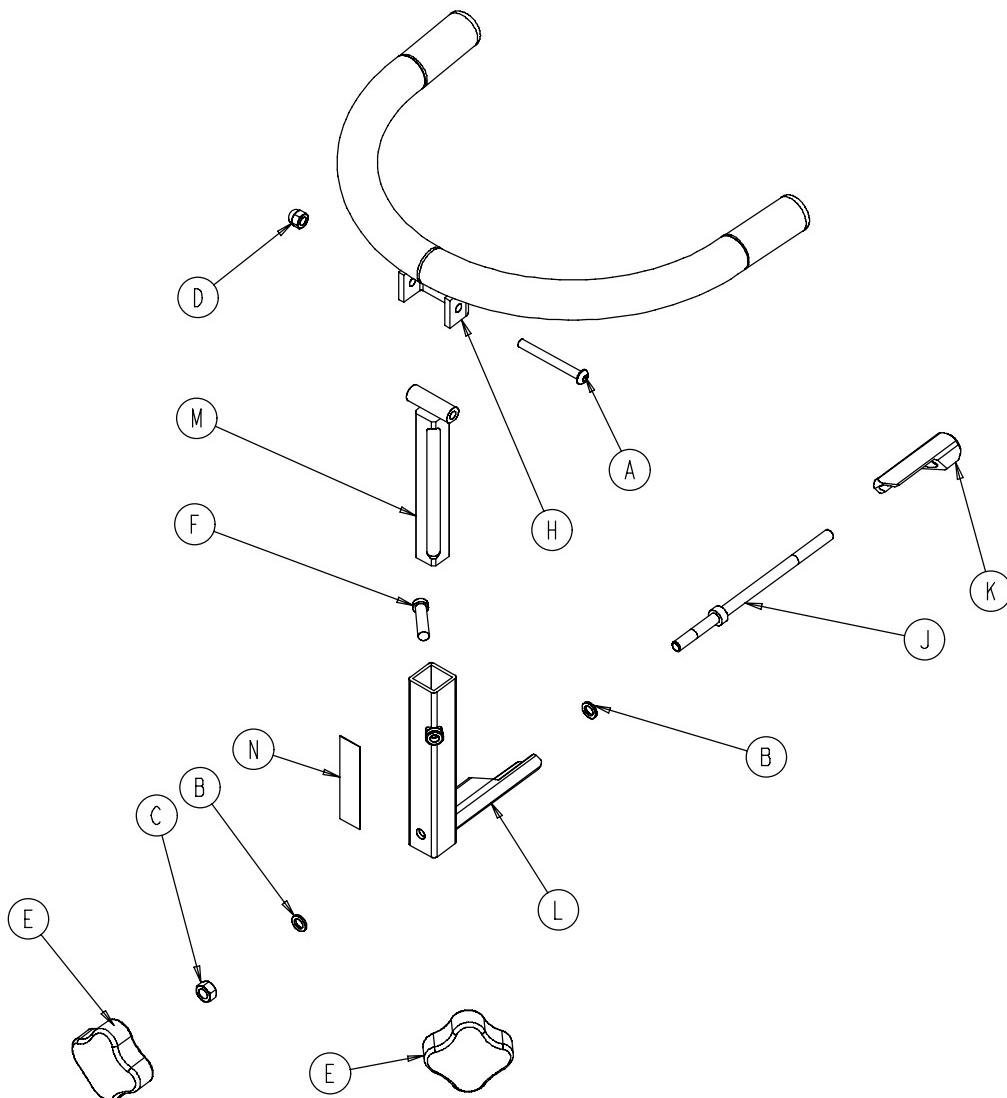

| Item | Part No. | Part Name | Qty. |
|------|--------------|-------------------------------|------|
| A | 0004-163-000 | But. Hd. Cap Screw | 1 |
| B | 0014-003-000 | Fiber Washer | 2 |
| C | 0015-012-000 | Hex Nut | 1 |
| D | 0017-004-000 | Acorn Nut | 1 |
| E | 0024-054-000 | Knob, Female | 2 |
| F | 0004-371-000 | Low Profile Soc. Hd. Cap Scr. | 1 |
| H | 1068-050-055 | Tube Weldment | 1 |
| J | 1068-250-041 | Wedge Bolt | 1 |
| K | 1068-250-042 | Locking Wedge | 1 |
| L | 1068-250-050 | Base Tube Weldment | 1 |
| M | 1068-252-055 | Support Bar Weldment | 1 |
| N | 1068-290-050 | Specification Label | 1 |


1069-033-205 Optional Wrist Rest Mounting Bracket

Applies to Zero Articulating Fowlers Only

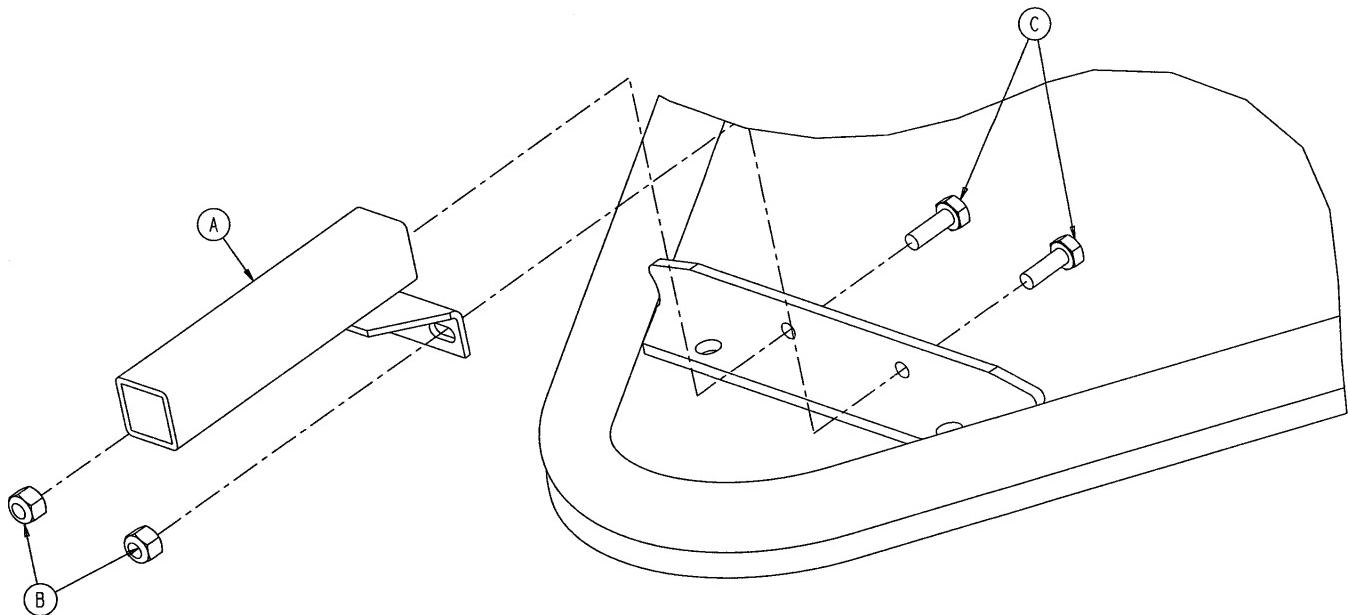


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 1069-033-200 | Wrist Rest Mounting Tube | 1 |
| B | 0016-028-000 | Hex Nut | 2 |
| C | 0003-002-000 | Hex Hd. Cap Screw | 2 |

1068-168-000 Optional Air Delivery / Drape Support

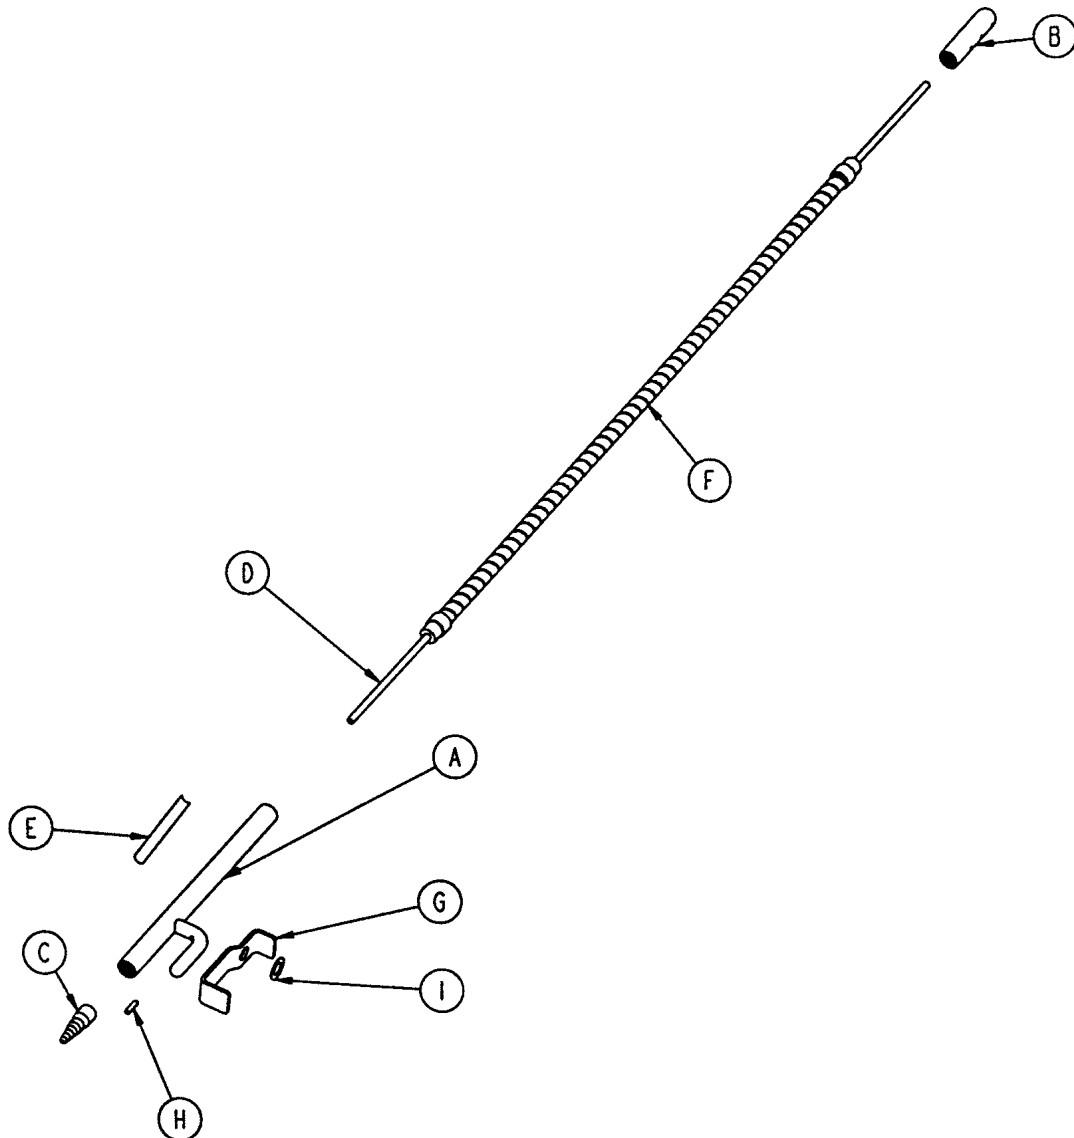


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------------|------|
| A | 1068-168-050 | Drape Support Weldment | 1 |
| B | 1068-068-043 | Oxygen Tube Cap | 1 |
| C | 1068-268-042 | Oxygen Tube Receptacle | 1 |
| D | 1068-068-041 | Oxygen Supply Line | 1 |
| E | 1068-090-068 | Specification Label | 1 |
| F | 1066-085-013 | Goose Neck | 1 |
| G | 1068-168-015 | O ₂ Latch | 1 |
| H | 0026-172-000 | Roll Pin | 1 |
| I | 0014-007-000 | Nylon Washer | 1 |

1068-266-000 Optional Accessory Rail Assembly

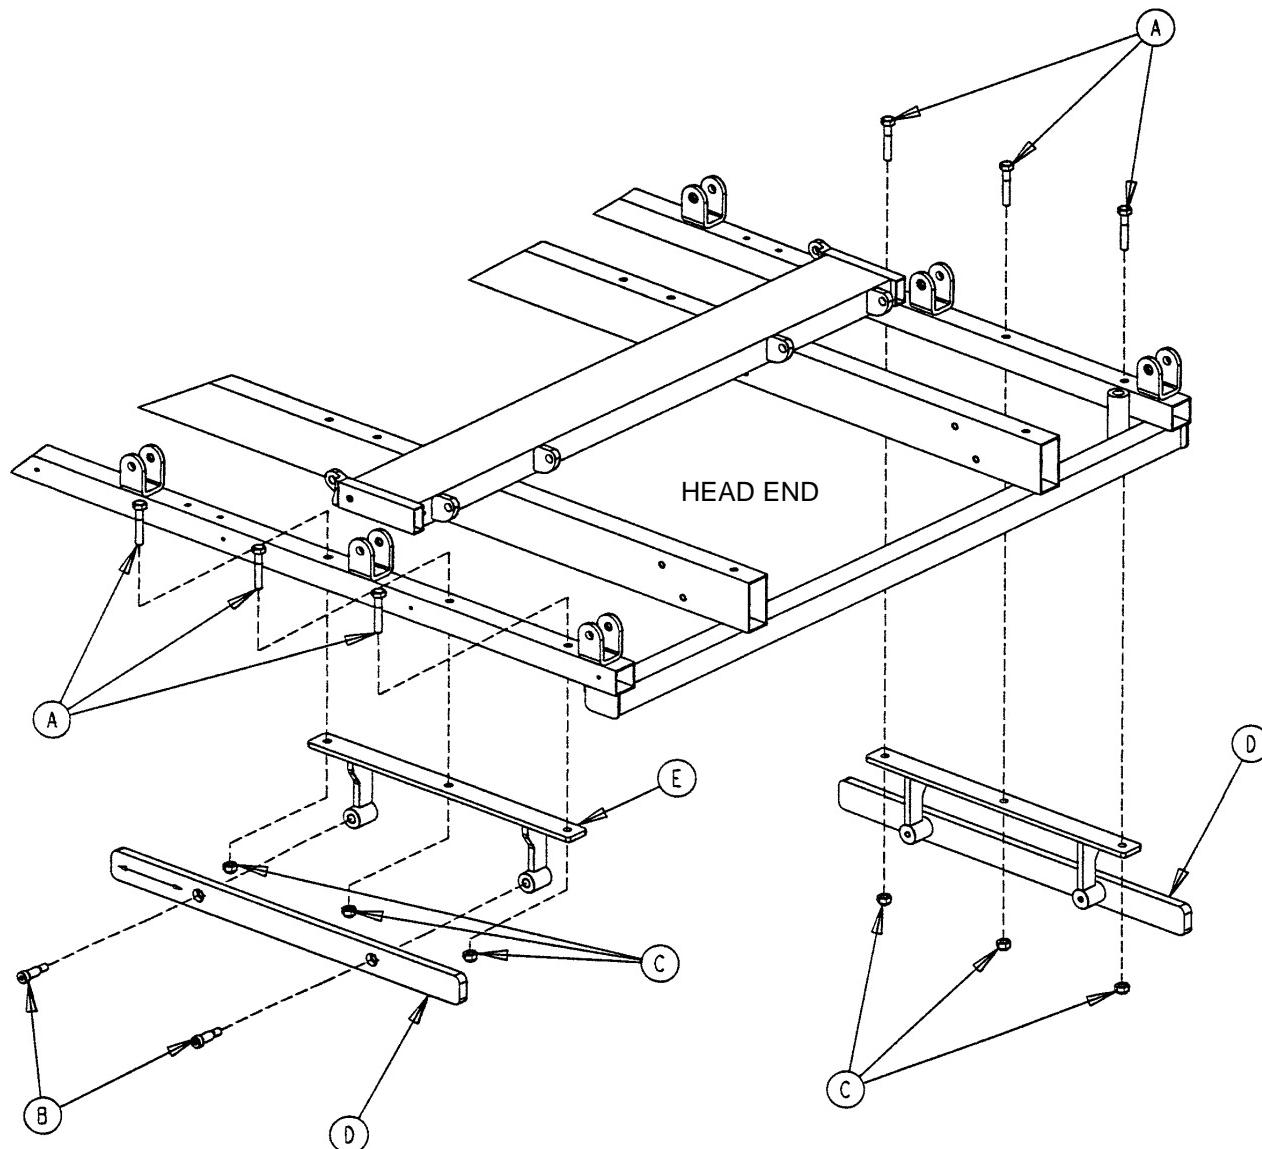


| Item | Part No. | Part Name | Qty. |
|------|--------------|---------------------------|------|
| A | 0003-047-000 | Hex Hd. Cap Screw | 6 |
| B | 0008-015-000 | Shoulder Bolt | 4 |
| C | 0016-028-000 | Nylock Hex Nut | 6 |
| D | 1068-066-042 | Option Bar Rail | 2 |
| E | 1068-266-050 | Mounting Bracket Weldment | 2 |

1068-056-110 Optional Arm Board with Direct Clamp

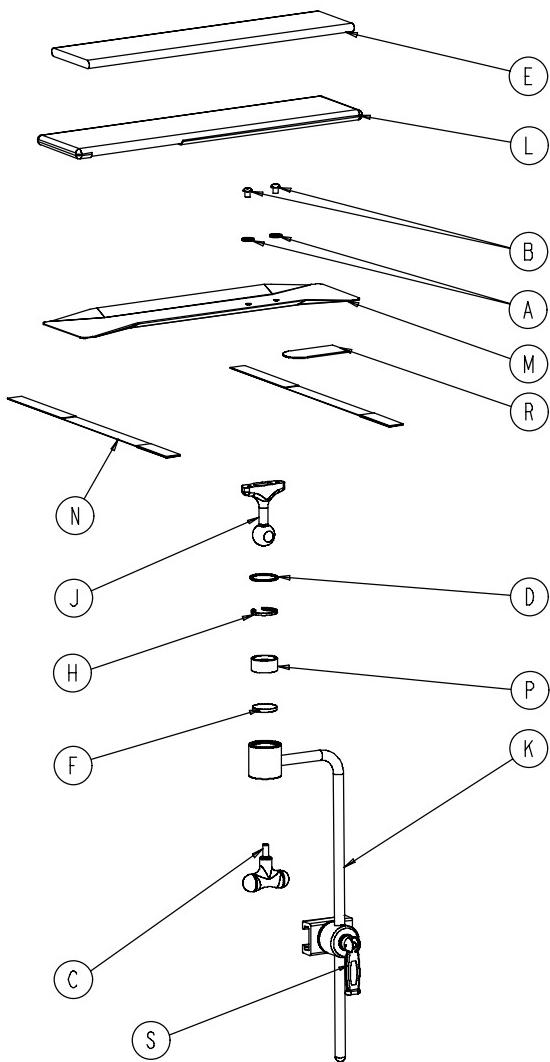


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0011-003-000 | Flat Washer | 2 |
| B | 0004-269-000 | Button Hd. Cap Screw | 2 |
| C | 0024-044-000 | T-Handle | 1 |
| D | 0028-104-000 | Retaining Ring | 1 |
| E | 0390-011-012 | Foam Pad | 1 |
| F | 1060-001-152 | Disc | 1 |
| H | 1060-001-154 | Split Ring | 1 |
| J | 1060-001-155 | Ball Post | 1 |
| K | 1060-001-159 | Leg Support Bar | 1 |
| L | 1068-056-013 | Arm Board Cover | 1 |
| M | 1068-056-015 | Arm Board | 1 |
| N | 1068-056-016 | Restraint Strap Assembly | 2 |
| P | 8812-670-000 | Jaw | 1 |
| R | 7900-001-102 | Adhesive Velcro Pile | 4" |
| S | 1068-054-010 | Direct Clamp | 1 |

1068-055-010 Optional Arm Board Assembly

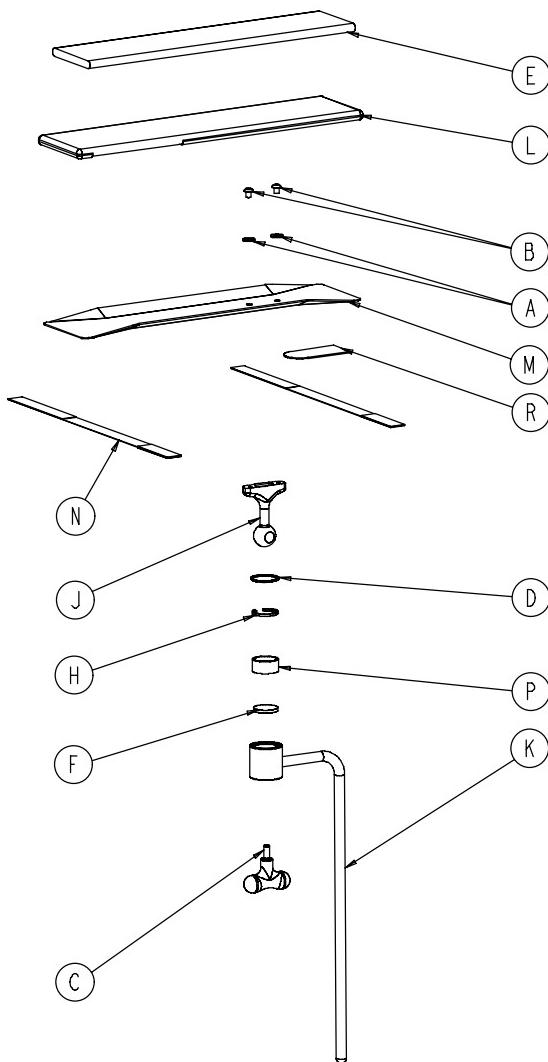


| Item | Part No. | Part Name | Qty. |
|------|--------------|--------------------------|------|
| A | 0011-003-000 | Flat Washer | 2 |
| B | 0004-269-000 | Button Hd. Cap Screw | 2 |
| C | 0024-044-000 | T-Handle | 1 |
| D | 0028-104-000 | Retaining Ring | 1 |
| E | 0390-011-012 | Foam Pad | 1 |
| F | 1060-001-152 | Disc | 1 |
| H | 1060-001-154 | Split Ring | 1 |
| J | 1060-001-155 | Ball Post | 1 |
| K | 1060-001-159 | Leg Support Bar | 1 |
| L | 1068-056-013 | Arm Board Cover | 1 |
| M | 1068-056-015 | Arm Board | 1 |
| N | 1068-056-016 | Restraint Strap Assembly | 2 |
| P | 8812-670-000 | Jaw | 1 |
| R | 7900-001-102 | Adhesive Velcro Pile | 4" |

0785-045-700 Optional Serving Tray Assembly

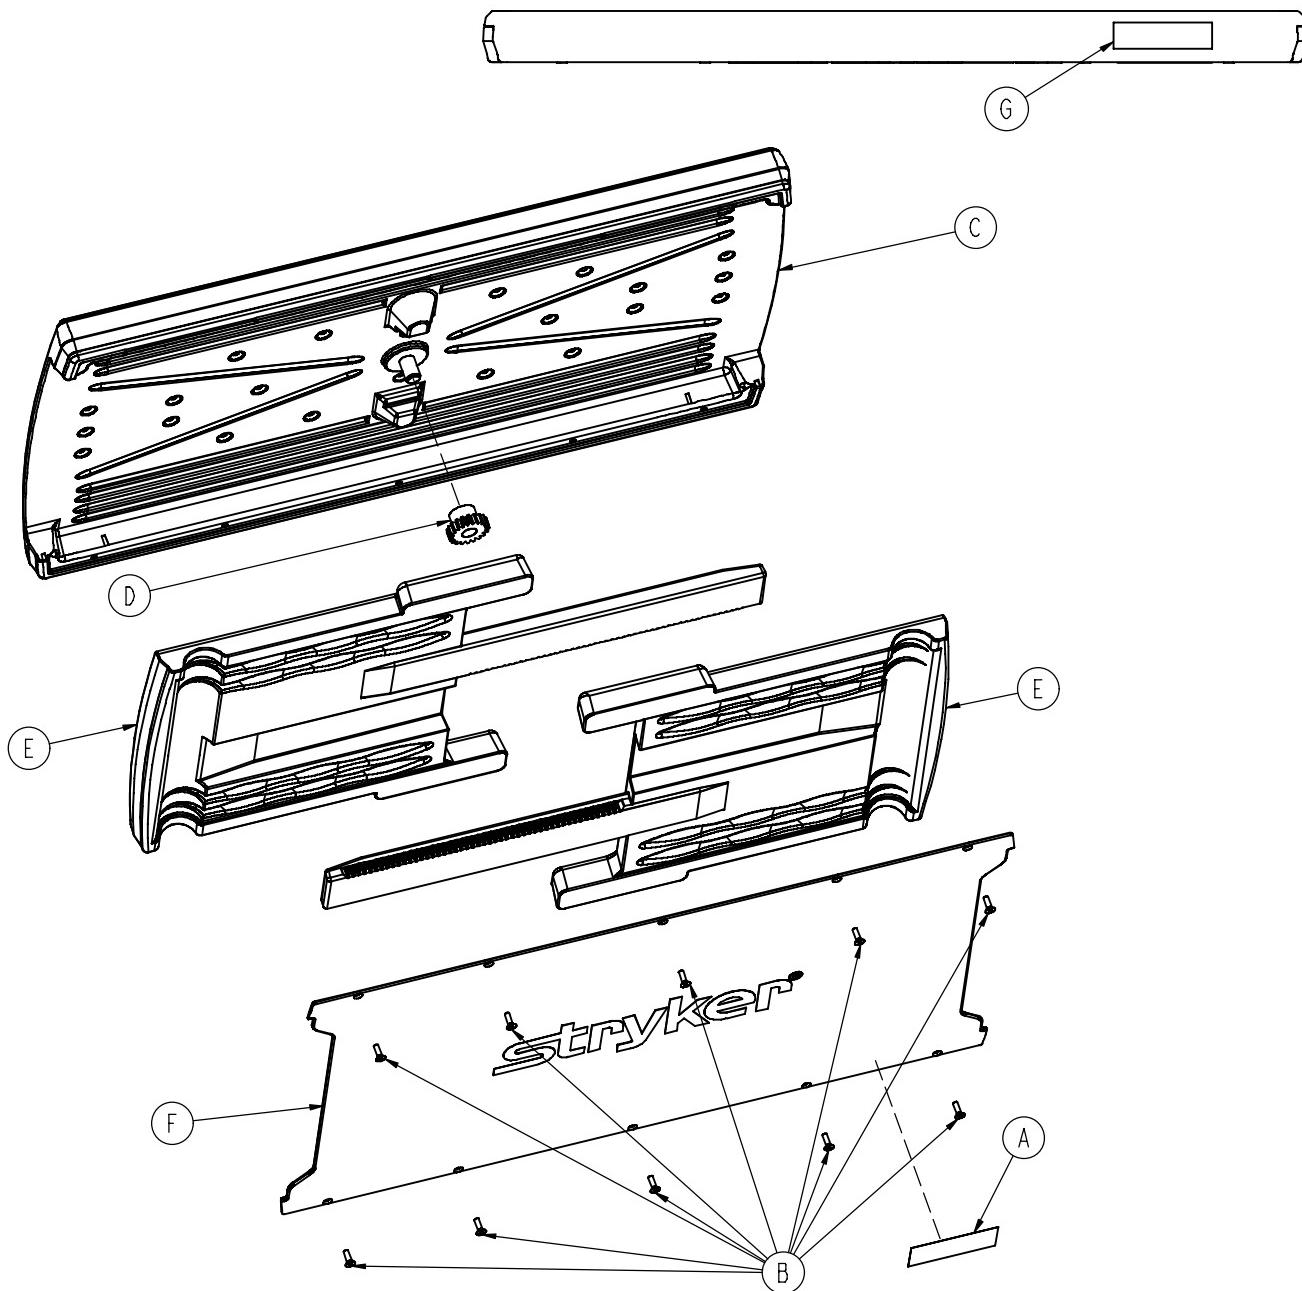


| Item | Part No. | Part Name | Qty. |
|------|--------------|-----------------------|------|
| A | 0785-045-701 | Serving Tray Label | 1 |
| B | 0785-045-704 | Flat Hd. Torx Screw | 10 |
| C | 0785-045-705 | Serving Tray Top | 1 |
| D | 0785-045-706 | Serving Tray Pinion | 1 |
| E | 0785-045-710 | Serving Tray Slider | 2 |
| F | 0785-045-715 | Serving Tray Cover | 1 |
| G | 0785-045-403 | Weight Capacity Label | 1 |

0785-045-500 Optional Foot Board/Chartholder Assembly

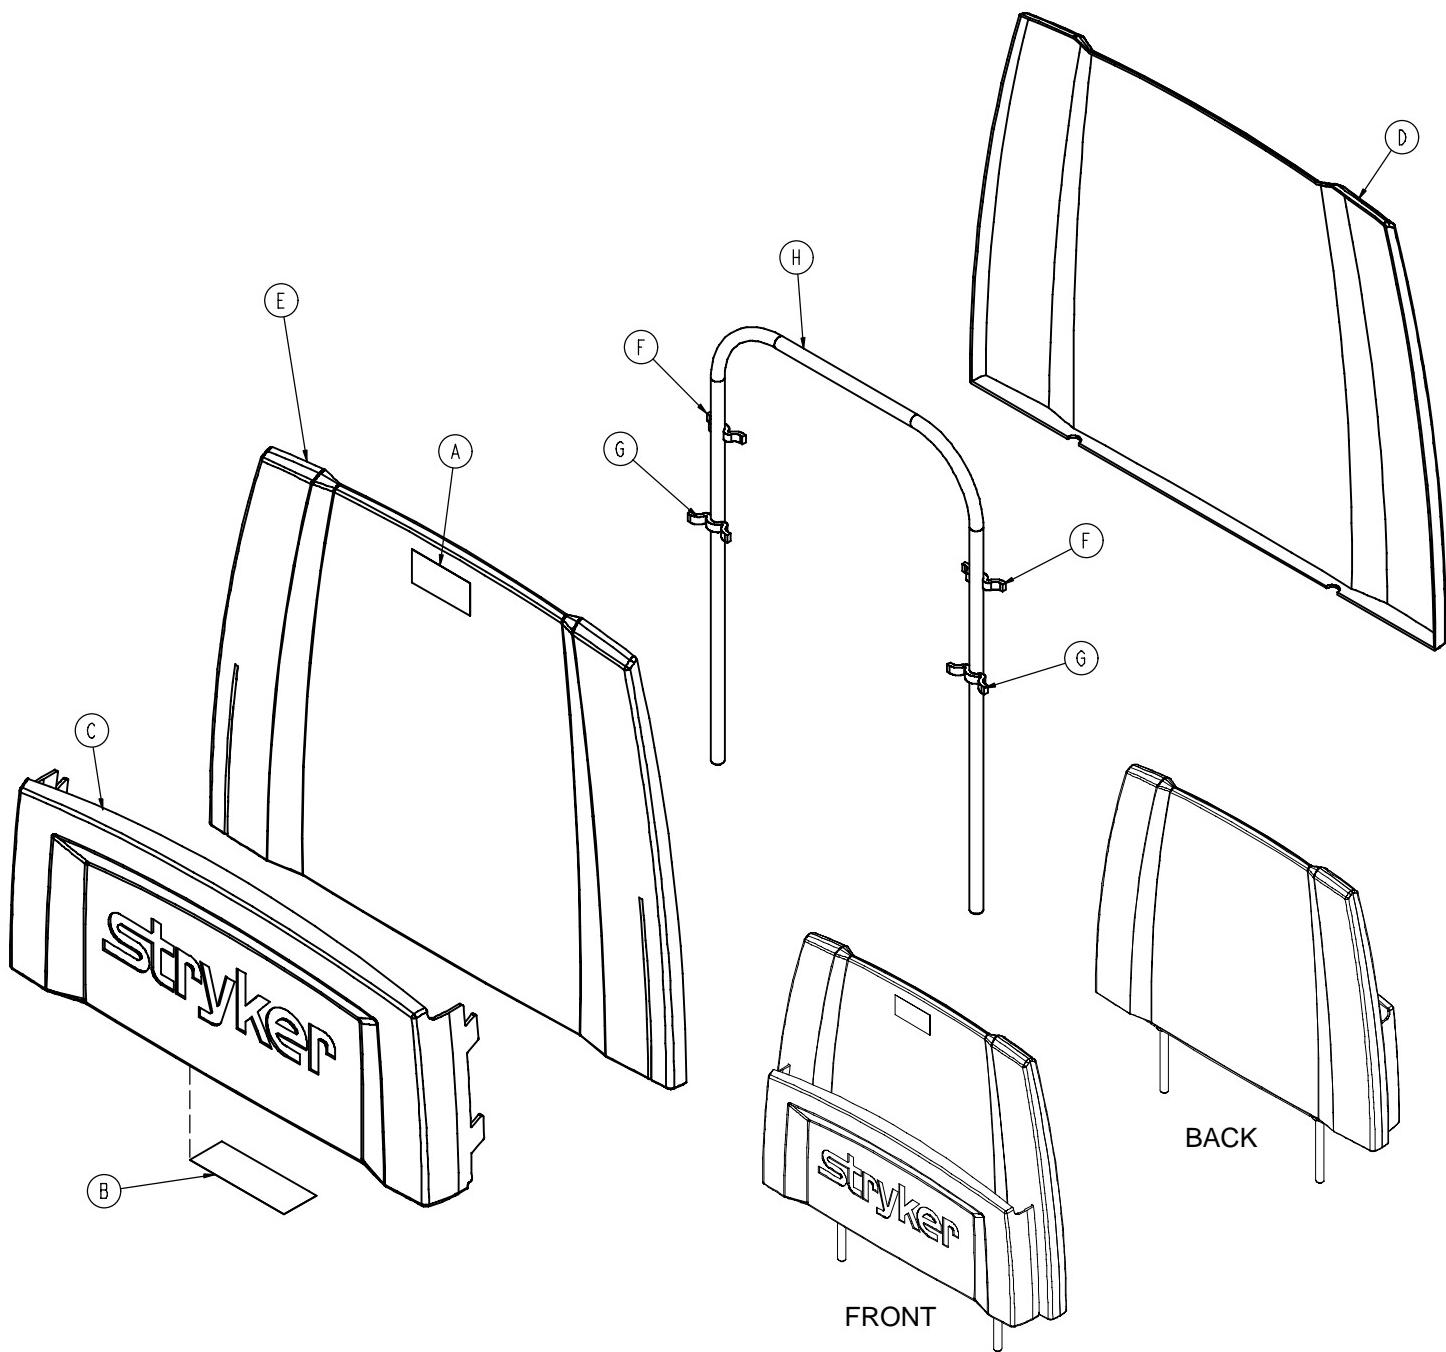


| Item | Part No. | Part Name | Qty. |
|------|--------------|------------------|------|
| A | 0785-045-402 | Push/Pull Label | 1 |
| B | 0785-045-501 | Foot Board Label | 1 |
| C | 0785-045-511 | Chartholder | 1 |
| D | 0785-045-512 | Foot Board Back | 1 |
| E | 0785-045-513 | Foot Board Front | 1 |
| F | 0785-045-514 | Small Standoff | 2 |
| G | 0785-045-515 | Large Standoff | 2 |
| H | 0946-029-010 | Support Weldment | 1 |

Mattresses and Siderail Pads

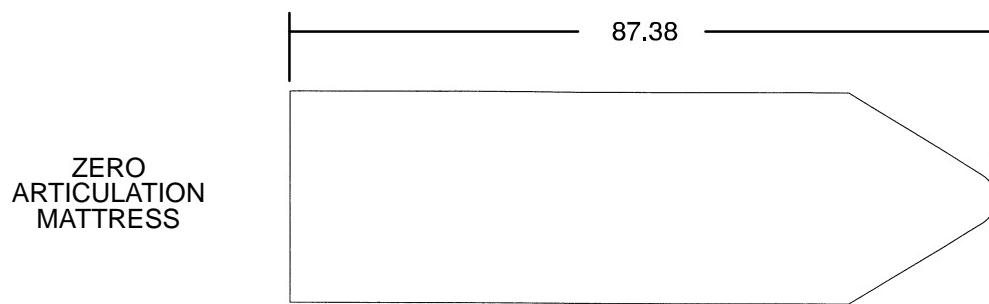


ZERO
ARTICULATION
MATTRESS

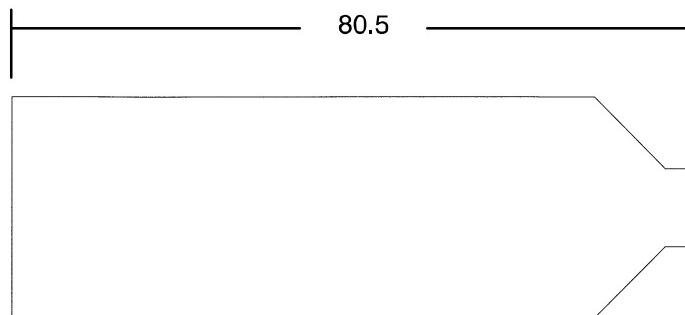

DUAL
ARTICULATION
MATTRESS

- Mattress, 2" Thick x 26" Wide, Standard, Dual Articulation part # 1069-026-050
Mattress, 3" Thick x 26" Wide, Standard, Dual Articulation part # 1069-026-060
Mattress, 4" Thick x 26" Wide, Standard, Dual Articulation part # 1069-026-090
Mattress, 3" Thick x 26" Wide, Enhanced Comfort, Dual Articulation part # 1069-026-070
Mattress, 4" Thick x 26" Wide, Enhanced Comfort, Dual Articulation part # 1069-026-080
Mattress, 3" Thick x 26" Wide, Standard, Zero Articulation part # 1069-026-010
Mattress, 3" Thick x 26" Wide, Enhanced Comfort, Zero Articulation part # 1069-026-020
Mattress, 4" Thick x 26" Wide, Enhanced Comfort, Zero Articulation part # 1069-026-030

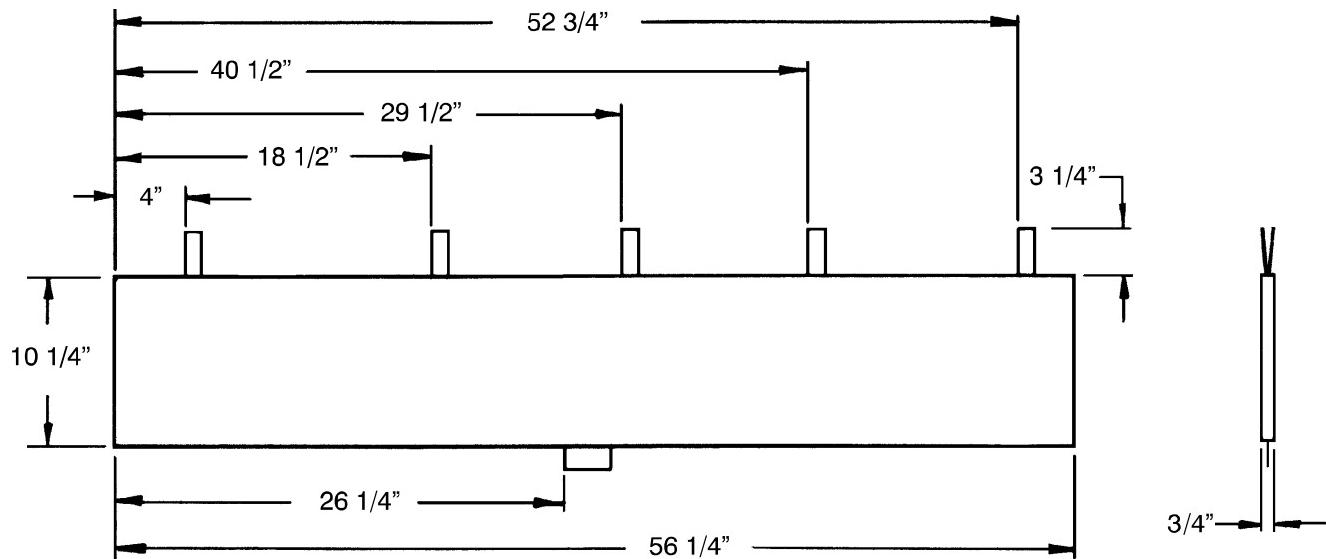

- Siderail Pad Set part # 1010-052-000

Warranty

Limited Warranty:

Stryker Medical Division, a division of Stryker Corporation, warrants to the original purchaser that its products should be free from defects in material and workmanship for a period of one (1) year after date of delivery. Stryker's obligation under this warranty is expressly limited to supplying replacement parts and labor for, or replacing, at its option, any product which is, in the sole discretion of Stryker, found to be defective. If requested by Stryker, products or parts for which a warranty claim is made shall be returned prepaid to Stryker's factory. Any improper use or any alteration or repair by others in such manner as in Stryker's judgement affects the product materially and adversely shall void this warranty. Any repair of Stryker products using parts not provided or authorized by Stryker shall void this warranty. No employee or representative of Stryker is authorized to change this warranty in any way.

Stryker Medical stretcher products are designed for a 10 year expected service life under normal use, conditions, and with appropriate periodic maintenance as described in the maintenance manual for each device. Stryker warrants to the original purchaser that the welds on its stretcher products will be free from structural defects for the expected 10 year life of the stretcher product as long as the original purchaser owns the product.

This statement constitutes Stryker's entire warranty with respect to the aforesaid equipment. STRYKER MAKES NO OTHER WARRANTY OR REPRESENTATION, EITHER EXPRESSED OR IMPLIED, EXCEPT AS SET FORTH HEREIN. THERE IS NO WARRANTY OF MERCHANTABILITY AND THERE ARE NO WARRANTIES OF FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT SHALL STRYKER BE LIABLE HEREUNDER FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM OR IN ANY MANNER RELATED TO SALES OR USE OF ANY SUCH EQUIPMENT.

To Obtain Parts and Service:

Stryker products are supported by a nationwide network of dedicated Stryker Field Service Representatives. These representatives are factory trained, available locally, and carry a substantial spare parts inventory to minimize repair time. Simply call your local representative, or call Stryker Customer Service at (800) 327-0770.

Service Contract Coverage:

Stryker has developed a comprehensive program of service contract options designed to keep your equipment operating at peak performance at the same time it eliminates unexpected costs. We recommend that these programs be activated *before* the expiration of the new product warranty to eliminate the potential of additional equipment upgrade charges.

A SERVICE CONTRACT HELPS TO:

- Ensure equipment reliability
- Stabilize maintenance budgets
- Diminish downtime
- Establish documentation for JCAHO
- Increase product life
- Enhance trade-in value
- Address risk management and safety

Warranty

Stryker offers the following service contract programs:

| SPECIFICATIONS | GOLD | SILVER | PM* ONLY |
|--|------|--------|----------|
| Annually scheduled preventative maintenance | X | | X |
| All parts,** labor, and travel | X | X | |
| Unlimited emergency service calls | X | X | |
| Priority one contact; two hour phone response | X | X | X |
| Most repairs will be completed within 3 business days | X | X | |
| JCAHO documentation | X | X | X |
| On-site log book w/ preventative maintenance & emergency service records | X | | |
| Factory-trained Stryker Service Technicians | X | X | X |
| Stryker authorized parts | X | X | X |
| End of year summary | X | | |
| Stryker will perform all service during regular business hours (9-5) | X | X | X |

* Replacement parts and labor for products under PM contract will be discounted.

** Does not include any disposable items, I.V. poles (except for Stryker HD permanent poles), mattresses, or damage resulting from abuse.

Stryker Medical also offers personalized service contracts.

Pricing is determined by age, location, model and condition of product.

*For more information on our service contracts,
please call your local representative or call (800) 327-0770 (option #2).*

Return Authorization:

Merchandise cannot be returned without approval from the Stryker Customer Service Department. An authorization number will be provided which must be printed on the returned merchandise. Stryker reserves the right to charge shipping and restocking fees on returned items.

SPECIAL, MODIFIED, OR DISCONTINUED ITEMS NOT SUBJECT TO RETURN.

Damaged Merchandise:

ICC Regulations require that claims for damaged merchandise must be made with the carrier within fifteen (15) days of receipt of merchandise. DO NOT ACCEPT DAMAGED SHIPMENTS UNLESS SUCH DAMAGE IS NOTED ON THE DELIVERY RECEIPT AT THE TIME OF RECEIPT. Upon prompt notification, Stryker will file a freight claim with the appropriate carrier for damages incurred. Claim will be limited in amount to the actual replacement cost. In the event that this information is not received by Stryker within the fifteen (15) day period following the delivery of the merchandise, or the damage was not noted on the delivery receipt at the time of receipt, the customer will be responsible for payment of the original invoice in full.

Claims for any short shipment must be made within thirty (30) days of invoice.

International Warranty Clause:

This warranty reflects U.S. domestic policy. Warranty outside the U.S. may vary by country. Please contact your local Stryker Medical representative for additional information.

European Representative

Stryker EMEA RA/QA Director
Stryker France
ZAC Satolas Green Pusignan
Av. De Satolas Green
69881 MEYZIEU Cedex
France

stryker®

3800 E. Centre Ave., Portage, MI 49002
(800) 327-0770
www.stryker.com



JH 10/06 1069-109-002 REV D